


### **CLOSE TO OUR CUSTOMERS**

Ejendals operates in a large number of countries globally. We have our own offices or local representatives in most European countries, the United States and the UAE. For more information please visit www.ejendals.com

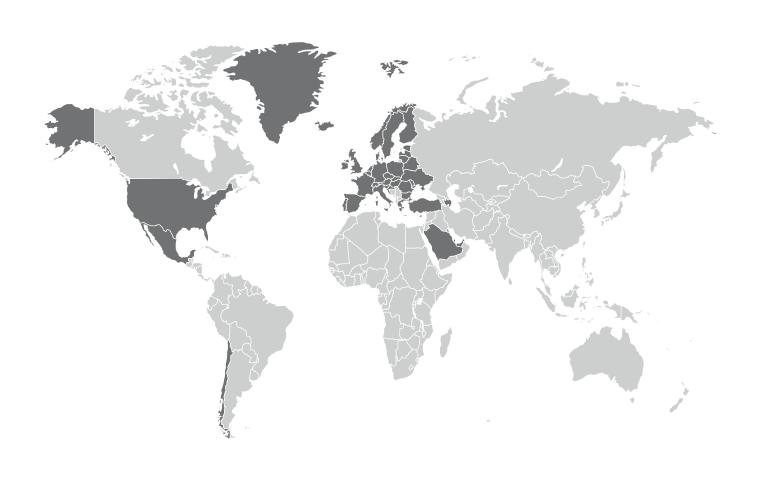


#### **EJENDALS INC.**

2745 Whitehall Park Drive, Suite 300, Charlotte, NC 28273 Phone 1-833-EJENDAL (1-833-353-6325) CLT@ejendals.com order.us@ejendals.com www.ejendals.com

## **CONTENTS**

		Page No.
	<b>Protecting hands and feet:</b> An introduction to Ejendals	4
HAND PROTECTION	Mechanical protection: Precision work	12
	Mechanical protection: All-round work	24
	Cut protection	32
	Thermal protection: Cold insulated	48
	Thermal protection:  Heat & Welding	60
	ESD and/or ATEX Gloves	68
	Other protection (vibration, impact)	72
	Barrier protection	78
FOOT PROTECTION	Footwear collections	84
	Safety footwear: General purpose	108
	Safety footwear: Cold insulated	130
	Safety footwear: Heat & Welding	134
	Safety footwear: Chainsaw Protection	135
	Occupational footwear	136
	Insoles, socks, accessories	138
	Product index	145



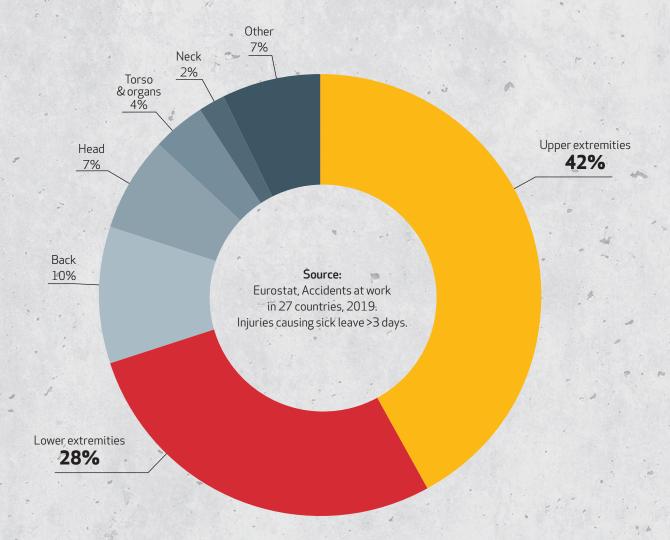

# Reducing the risk of preventable injuries

At Ejendals, we have a long history of reducing the risk of preventable injuries to hands and feet. We've been doing it for over 70 years.

Statistics show that injuries to hands and feet are the most common injuries requiring sick leaves longer than three days. With the right PPE equipment, many of these injuries are preventable.

Investments in quality hand and foot protection result in fewer occupational injuries, improved levels of attendance and increased productivity, ultimately leading to lower overall costs.



## Ejendals' Safety Concept

At Ejendals, we don't just offer gloves and shoes. Our safety concept goes beyond just creating PPE equipment.

The Ejendals Safety Concept encompasses our decades of experience, our approach to quality, and our Nordic ingenuity. Together with our customers, we work to reduce risks and increase long-term productivity.

You can't always control your working environment and conditions, but you can equip your-self with the very best protective gear to help prevent accidents and injuries. To ensure that our safety products do what they promise, we submit them to rigorous testing and certification.

When we work with our customers within the Ejendals Safety Concept, the program is always specifically tailored to the end-use and their operations. But it usually involves training at the Ejendals Safety Academy. We also perform on-site safety inspections, advise on tools and practices to implement, and do continuous follow-up checks. Lastly and perhaps most importantly, we're always working to strengthen the bonds of trust between our customers and us.

#### **SAFETY**

Safety is a true keyword to us. Our workplaces are kept safe through proactive work, e.g., risk assessments and safety walks. We follow-up risk observations, and incidents ranging from near-misses to Lost Time Injuries.

Our principles also extend beyond our own operations. Upstream, our safety requirements come through our CoC for Business, while downstream our Safety Concept improves our customers' safety performance.

#### **ETHICS**

All Ejendals employees are trained in our Code of Conduct (CoC), while for our business partners the ethics requirements are directed through our separate CoC for Business. In 2021, we introduced a noncompliance (whistle-blower) mechanism that can be used both internally and at our suppliers. We also clarified our suppliers' further responsibility for their suppliers regarding these important matters – all to be monitored through CSR audits.

#### PRODUCTS AND INNOVATION

In product development, we continuously aim to deliver long-lasting, high-quality products while simultaneously improving their sustainability.

- Use of recycled materials and design for sustainability; e.g., by reducing the number of parts.
- Optimized packaging (choice and amount of packaging material, labeling reduction).
- Fine-tuned production measures to reduce waste and material/water usage.

#### GHG (CO.) EMISSIONS

Ejendals supports the Paris agreement by halving our GHG emissions by 2030. Historic data on  $\mathrm{CO}_2$  emissions have been recalculated to the GHG Protocol standard, starting with Scope 1 and 2 and now including our company car emissions for the entire Nordics. Our new car policy strongly favours electric cars; we now have five charging stations in Leksand.

#### **ENERGY**

We use 100% renewable electricity at both sites (Leksand and Jokipii). Energy optimization for our buildings will continue, and during 2021 we installed a 400+ MWh/year solar panel system in Jokipii.



During 2021, we installed a 400+ MWh/year solar panel system in Jokipii, projected to give 20% of the site's annual electricity need.

#### **WASTE MANAGEMENT**

Ejendals designs and develops all our products and processes keeping waste minimization in mind. Additionally, we aim to increase the proportion of recyclable waste.



Read more about our work with sustainability at ejendals.com.

#### **ECOVADIS SILVER MEDAL**

Ejendals received a sustainability Silver Medal from EcoVadis in 2023. Using innovative technology and sustainability expertise, EcoVadis provides the leading solution for monitoring sustainability in global supply chains.



#### OTHER CERTIFICATES AND LABELS





Ejendals AB and Ejendals Suomi Oy have Certificates for ISO 9001, 14001, 45001.



Product certificate OEKO-TEX® for safety gloves.



Bio-based Dyneema® fiber at heart.



Product certificate EU Ecolabel for safety shoes.



Leather Working Group



## **HAND PROTECTION**

	Page No.
Mechanical protection: Precision work	12
Mechanical protection: All-round work	24
Cut protection	32
Thermal protection: Cold insulated	48
Thermal protection:  Heat & Welding	60
ESD and/or ATEX Gloves	68
Other protection (vibration, impact)	72
Barrier protection	78
Product index	145



### **MECHANICAL PROTECTION: PRECISION WORK**

	DRY ENVIRONMENTS	LIGHT MOIST/OILY ENVIRONMENTS	WET/OILY ENVIRONMENTS
SYNTHETIC LEATHER Quality synthetic leather.	Excellent grip and fingertip sensitivity. Made from our high-tech synthetic leather Microthan that allows for sophisticated ergonomic designs.  9100 9105 Microthan 9105 Microthan, tight fit 321 Synthetic suede		
LEATHER Leather is strong, supple and adapts to changes in weather and temperatures.	brea exc	water repellent palm, ithable backhand, ellent grip in oily environments	6614 *DGT 3
KNITTED (AND DIPPED) Knitted gloves enable a very precise fit.	Ultra thin  777 PU, 18 gg		
	867 868 866 811 8800 Nitrile foam, 15 gg, contact heat <100°C P.71	8802 Nitrile foam, 18 gg, contact heat < 100°C	8803 Nitrile foam, 18 gg.contact heat <100°C
	883A Secontact heat <100°C Secontact heat <1	8850 Nitrile foam, 18 gg, contact heat < 100°C *OBT	8804 Nitrile foam, 18 gg, contact heat < 100°C



#### MECHANICAL PROTECTION | PRECISION WORK: DRY ENVIRONMENTS

#### TEGERA® PRO 9100

This synthetic leather glove in Microthan® has a reinforced index finger. It is suitable for fine assembly work in dry and slightly oily environments.

DISPLAY Hook with hangtag
SIZE XXS – XXL
LENGTH RANGE 212-238 mm
UNITS PER BUNDLE/CARTON 6 60 PAIRS

**FEATURES** Chrome free, reinforced index finger, reinforced seams, pre-curved fingers, specially designed thumb, ergonomically shaped, reflector, specially designed details



FOR THE BEST GRIP AND DEXTERITY

MICROTHAN®

#### MECHANICAL PROTECTION | PRECISION WORK: DRY ENVIRONMENTS

#### TEGERA® PRO 9105

This synthetic leather glove in Microthan® has hook and loop closure for a more secure fit. It is suitable for fine assembly work in dry and slightly oily environments.

**DISPLAY** Hook with hangtag

SIZE XXS - 4XL

LENGTH RANGE 216-253 mm

UNITS PER BUNDLE/CARTON 6 60 PAIRS

 $\textbf{FEATURES} \ \textbf{Chrome free, reinforced index}$ finger, reinforced seams, reinforced fingertips, pre-curved fingers, specially designed thumb, ergonomically shaped, reflector, specially designed details



**DESIGNED FOR MAXIMUM FIT** 

 $\textbf{MICRO} THAN^{\circledast}$ 





EN ISO 21420:2020



EN 388:2016+A1:2018





#### TEGERA® 325

 $Soft, synthetic \ leather \ glove \ with \ good \ grip \ and \ reinforced \ index \ finger. \ Polyester \ back \ for \ better$ breathability. Elasticated for improved fit.

**DISPLAY** Thread

SIZE 3XS - 4XL

LENGTH RANGE 210-245 mm

UNITS PER BUNDLE/CARTON 6 60 PAIRS

FEATURES Breathable back, reinforced palm,

reinforced seams







**C E Cat. II UK** EN ISO 21420:2020



EN 388:2016+A1:2018



#### TEGERA® 321

 $Soft and \ durable \ glove \ in \ synthetic \ leather. \ Reinforced \ and \ chrome \ free. \ Polyester \ back \ for \ better$ breathability. Elasticated for improved fit.

DISPLAY Hook with hangtag

SIZE XS - XXL

LENGTH RANGE 220-260 mm

UNITS PER BUNDLE/CARTON 6 60 PAIRS

FEATURES Chrome free, reinforced index finger













#### ■ TEGERA® 114

Dexterous, quality leather glove for fine and varied assembly work. Thin high-quality goatskin on  $palm\ provides\ excellent\ tactility\ and\ fingertip\ feeling.\ Nylon\ back\ helps\ improved\ breathability.$ 

**DISPLAY** Thread SIZE XXS - XXL

LENGTH RANGE 210-260 mm

UNITS PER BUNDLE/CARTON 12 120 PAIRS









EN ISO 21420:2020



EN 388:2016+A1:2018 2011X



#### TEGERA® 124

Leather glove, unlined, full grain goatskin, polyester, Cat. II, for fine assembly work

**DISPLAY** Thread SIZE XS - 3XL

LENGTH RANGE 220-270 mm

UNITS PER BUNDLE/CARTON 12 120 PAIRS











EN 388:2016+A1:2018 2010X



#### MECHANICAL PROTECTION | PRECISION WORK: WET/OILY ENVIRONMENTS

#### **TEGERA®** 6614

 $Top\ quality\ leather\ glove\ with\ water\ and\ oil\ repellent\ palm\ and\ polyester\ back.$ Perfect for good grip in harsh, slippery, oily, and greasy environments.

**DISPLAY** Thread

palm, soft

SIZE XXS - 3XL

LENGTH RANGE 210-255 mm

UNITS PER BUNDLE/CARTON 6 60 PAIRS

FEATURES Withstands contact heat up to 100°C, specially designed thumb, water and oil repellent




**FOR GOOD GRIP IN OILY ENVIRONMENTS** 







UK EN ISO 21420:2020











# TEGERA® OIL GRIP COLLECTION

An innovative solution for oily and greasy environments

# MAXIMUM SAFETY IN GREASY CONDITIONS

Ejendals has developed a special collection of gloves designed with an excellent oil barrier and outstanding grip in oily environments. This advanced protection is achieved through a triple-dipping process and a special nitrile foam dip layer, ensuring maximum safety and efficiency in greasy conditions.

### **EXCEPTIONAL DEXTERITY**

Despite their robust protective qualities, these gloves are exceptionally soft and comfortable. Designed to be flexible, the gloves allow for free movement and unhindered work. All gloves in this collection have achieved the highest dexterity score of 5, ensuring they do not compromise on functionality. Knitted in 18 gg.

# IDEAL FOR A WIDE RANGE OF APPLICATIONS

The TEGERA® Oil Grip gloves are perfect for use in industries and maintenance, repair, and operations (MRO) businesses that work with machinery, metals, and components in lubricated environments.



**TEGERA® 6614** 



TEGERA® 6615



TEGERA® 8850



**TEGERA® 8855** 

# TEGERA® 777

## Ultra-thin comfort and precision

Our most dexterous glove to date, the 18 gg TEGERA® 777 provide the ultimate in fit and flexibility for precise handling in dry or slightly oily environments.

#### **ULTRA-THIN COMFORT**

Thin, breathable protection for any type of light assembly work.

#### **WATER- AND OIL-REPELLENT GRIP**

PU-dipped palm enhances your grip and adds a durable oil- and water-repellent layer.

#### IMPROVED FINGERTIP SENSITIVITY

Ideally suited to delicate tasks where precision handling is required.



#### MECHANICAL PROTECTION | PRECISION WORK: DRY ENVIRONMENTS

#### ■ TEGERA® 777

Our thinnest work glove for delicate tasks. Superb dexterity and tactility thanks to the ultra thin 18G knitting technology. Thin PU coating on palm provides better grip and abrasion protection.

DIPPING Palm-dipped DISPLAY Hook with hangtag **DIPPING MATERIAL** PU LINING MATERIAL 18 gg, nylon **GRIP PATTERN** Smooth finish SIZE XXS - XXI

LENGTH RANGE 220-270 mm UNITS PER BUNDLE/CARTON 6 120 PAIRS **FEATURES** Ultra thin



A PRECISION GLOVE WITH SMOOTH DIPPING









#### ■ TEGERA® 867

 $Multi-packed \ (6\ pairs\ in\ 1\ pack)\ synthetic\ white\ glove.\ 13\ gg\ knitted,\ PU\ palm-dipped\ with\ smooth$ finish for good grip on dry and moist surfaces. For precision work.

**DIPPING** Palm-dipped **DISPLAY** Bulk pack **DIPPING MATERIAL** PU LINING MATERIAL 13 gg, polyester **GRIP PATTERN** Smooth finish SIZE XS - XXL

LENGTH RANGE 220-260 mm **QUANTITY PER PACK** 6 Pairs **UNITS PER BUNDLE/CARTON** 20 PACKS



WHITE, MULTI-PACKED STANDARD PU GLOVE





EN ISO 21420:2020





#### MECHANICAL PROTECTION | PRECISION WORK: DRY ENVIRONMENTS

#### TEGERA® 868

Multi-packed (6 pairs in 1 pack) synthetic grey glove. 13 gg knitted, PU palm-dipped with smooth  $finish \ for \ good \ grip \ on \ dry \ and \ moist \ surfaces. \ For \ precision \ work.$ 

**DIPPING** Palm-dipped **DISPLAY** Bulk pack **DIPPING MATERIAL** PU LINING MATERIAL 13 gg, polyester GRIP PATTERN Smooth finish SIZE XXS - XXI

LENGTH RANGE 220-260 mm **QUANTITY PER PACK** 6 Pairs **UNITS PER BUNDLE/CARTON** 20 PACKS



**GREY, MULTI-PACKED STANDARD PU GLOVE** 







EN ISO 21420:2020



EN 388:2016+A1:2018





#### ■ TEGERA® 866

Multi-packed (6 pairs in 1 pack) synthetic black glove. 13 gg knitted, PU palm-dipped with smooth  $finish \ for \ good \ grip \ on \ dry \ and \ moist \ surfaces. \ For \ precision \ work.$ 

**DIPPING** Palm-dipped **DISPLAY** Bulk pack DIPPING MATERIAL PU LINING MATERIAL 13 gg, polyester **GRIP PATTERN** Smooth finish SIZE XS - XXL

LENGTH RANGE 220-260 mm **QUANTITY PER PACK** 6 Pairs UNITS PER BUNDLE/CARTON 20 PACKS



**BLACK, MULTI-PACKED** STANDARD PU GLOVE





CE Cat. II UK EN ISO 21420:2020



EN 388:2016+A1:2018



#### TEGERA® INFINITY 8801

Dexterous work glove, 15 gg knitted with super soft nitrile foam that provides excellent grip on  $\,$ dry surfaces. Breathable materials for all day comfort.

**DIPPING** Palm-dipped **DISPLAY** Bulk pack **DIPPING MATERIAL** Nitrile foam, waterbased PU LINING MATERIAL 15 gg, nylon, spandex GRIP PATTERN Foam grip pattern

LENGTH RANGE 205-265 mm UNITS PER BUNDLE/CARTON 6 120 PAIRS FEATURES Withstands contact heat up to 100°C,

approved for handling foodstuffs, thin



**SUPER SOFT, FOAM FINISH, PALM DIPPED** 



SIZE XXS - XXL

















#### TEGERA® INFINITY 8800

Dexterous work glove, 15 gg knitted with nitrile foam with smooth surface that provides excellent grip on dry and moist surfaces. Breathable materials for all day comfort.

**DIPPING** Palm-dipped **DISPLAY** Bulk pack **DIPPING MATERIAL** Nitrile LINING MATERIAL 15 gg, nylon, spandex **GRIP PATTERN** Smooth finish SIZE XXS - XXL

LENGTH RANGE 205-265 mm **UNITS PER BUNDLE/CARTON** 6 120 PAIRS FEATURES Withstands contact heat up to 100°C, approved for handling foodstuffs, thin

MECHANICAL PROTECTION | PRECISION WORK: DRY ENVIRONMENTS



SOFT, SMOOTH FINISH, **PALM DIPPED** 








EN ISO 21420:2020



EN 388:2016+A1:2018











#### TEGERA® 883A

 $Flexible, soft, 15 gg\ knitted\ skin\ friendly\ synthetic\ glove, palm-dipped\ with\ nitrile\ micro\ foam.$ Touch screen function. For light weight work in dry and moist environments.

DIPPING Palm-dipped **DISPLAY** Hook with hangtag **DIPPING MATERIAL** Nitrile foam LINING MATERIAL 15 gg, nylon, spandex GRIP PATTERN Micro foam grip pattern SIZE XXS - XXL

LENGTH RANGE 220-260 mm UNITS PER BUNDLE/CARTON 12 120 PAIRS FEATURES Withstands contact heat up to 100°C, for touchscreen



**CUTA** 

**TOUCH SCREEN FUNCTION, FOR LIGHT WORK** 









CE Cat. II UK EN ISO 21420:2020



EN 388:2016+A1:2018











Flexible, skin friendly synthetic glove, palm-dipped with nitrile foam and nitrile dots for great grip.Touch function. For light weight work in dry and moist environments.

**DIPPING** Palm-dipped **DISPLAY** Hook with hangtag DIPPING MATERIAL Nitrile foam, nitrile-dots LINING MATERIAL 15 gg, nylon, spandex **GRIP PATTERN** Dots SIZE XXS - 3XL

LENGTH RANGE 220-260 mm UNITS PER BUNDLE/CARTON 12 120 PAIRS FEATURES Withstands contact heat up to 100°C, for touchscreen



**CUTA** 


**TOUCH SCREEN FUNCTION AND GREAT GRIP** 






















#### MECHANICAL PROTECTION | PRECISION WORK: DRY ENVIRONMENTS

#### **TEGERA® 8820**

A high visibility knitted glove for precision work in dry-to-moist environments. Flexible and soft with touchscreen functionality. Nitrile foam dipping for ultimate grip.

**DIPPING** Palm-dipped **DISPLAY** Bulk pack **DIPPING MATERIAL** Nitrile foam LINING MATERIAL 15 gg, polyester, spandex  $\textbf{GRIP PATTERN} \, \mathsf{Micro} \, \mathsf{foam} \, \mathsf{grip} \, \mathsf{pattern}$ SIZE XXS - 3XL

LENGTH RANGE 200-270 mm UNITS PER BUNDLE/CARTON 12 120 PAIRS FEATURES Withstands contact heat up to 100°C, for touchscreen, latex-free, high visibility colour



**TOUCHSCREEN** 








EN ISO 21420:2020



EN 388:2016+A1:2018 4131X











 $A \ high \ visibility \ knitted \ glove \ for \ precision \ work \ in \ dry-to-moist \ environments. \ Flexible \ and \ soft$ with touchscreen functionality. Nitrile foam dipping with yellow Nitrile dots in the palm.

**DIPPING** Palm-dipped **DISPLAY** Bulk pack DIPPING MATERIAL Nitrile foam, nitrile-dots LINING MATERIAL 15 gg, polyester, spandex **GRIP PATTERN** Dots SIZE XXS - 3XL

LENGTH RANGE 200-270 mm UNITS PER BUNDLE/CARTON 12 120 PAIRS FEATURES Withstands contact heat up to 100°C, for touchscreen, latex-free, high visibility colour



**TOUCHSCREEN** 





















 $Soft, breathable 15\,gg\,synthetic\,glove, palm-dipped\,with\,nitrile\,foam.\,For\,light\,weight\,work\,in\,dry\,glove, palm-dipped\,with\,nitrile\,foam.\,For\,light\,work\,in\,dry\,glove, palm-dipped\,work\,in\,dry\,glove, palm-dipped\,work\,in\,dry\,glove, palm-dipped\,work\,in\,dry\,glove, palm-dipped\,work\,in\,dry\,glove, palm-dipped\,work\,in\,dry\,glove, palm-dipped\,work\,in\,dry\,glove, palm-dipped\,work\,in$ environments. Food approved (not for fatty food). Oeko-Tex certificate.

**DIPPING** Palm-dipped **DISPLAY** Bulk pack **DIPPING MATERIAL** Nitrile foam LINING MATERIAL 15 gg, nylon, spandex GRIP PATTERN Foam grip pattern SIZE XS - XXL

LENGTH RANGE 220-260 mm UNITS PER BUNDLE/CARTON 12 120 PAIRS FEATURES Approved for handling foodstuffs



**PALM-DIPPED WITH BLACK NITRILE FOAM** 



EN 420:2003 + A1:2009









#### MECHANICAL PROTECTION | PRECISION WORK: LIGHT MOIST/OILY ENVIRONMENTS

#### **TEGERA® INFINITY 8802**

Precision work glove with unique feel and ultimate dexterity for oily jobs. Ultra light thanks to 18 gg knitting. Palm dipped with microfoam coated palm for better grip.

**DIPPING** Palm-dipped, double-dipped

**DISPLAY** Bulk pack

DIPPING MATERIAL Nitrile, nitrile foam,

 $waterbased\,PU$ 

LINING MATERIAL 18 gg, nylon

GRIP PATTERN Foam grip pattern

SIZE XXS - XXL

LENGTH RANGE 215-275 mm

**UNITS PER BUNDLE/CARTON** 6 120 PAIRS

FEATURES Withstands contact heat up to 100°C, approved for handling foodstuffs, oil and grease resistant palm, thin



**GREAT FIT, DOUBLE COATED PALM DIPPED** 








EN ISO 21420:2020



EN 388:2016+A1:2018 4121X















#### NEW TEGERA® OILGRIP 8850

Excellent grip in dry, moist, and slightly oily environments. Single dipped with nitrile foam in the palm, which makes the glove comfortable while still preventing slipping. Touchscreen functionality.

**DIPPING** Palm-dipped

**DISPLAY** Bulk pack

**DIPPING MATERIAL** Nitrile foam

LINING MATERIAL~18~gg, recycled polyester,spandex

**GRIP PATTERN** Foam grip pattern

SIZE XS - 3XL

LENGTH RANGE 210-270 mm

UNITS PER BUNDLE/CARTON 672 PAIRS

 $\textbf{FEATURES} \ \text{Withstands contact heat up to } 100^{\circ}\text{C,}$ 



FOR DRY, **MOIST, AND SLIGHTLY OILY ENVIRONMENTS** 

#### **\***OGT™





EN ISO 21420:2020



EN 388:2016+A1:2018











#### MECHANICAL PROTECTION | PRECISION WORK: WET/OILY ENVIRONMENTS

#### **TEGERA® INFINITY 8803**

Precision work glove with unique feel and ultimate dexterity for oily jobs. Ultra-light thanks to 18 gg knitting. Knuckle dipped with microfoam coated palm for better grip.

DIPPING 3/4 dipped, double-dipped

**DISPLAY** Bulk pack

DIPPING MATERIAL Nitrile, nitrile foam,

waterbased PU

LINING MATERIAL 18 gg, nylon, spandex

**GRIP PATTERN** Foam grip pattern

SIZE XS - XXL

LENGTH RANGE 225-275 mm

**UNITS PER BUNDLE/CARTON** 6 120 PAIRS

FEATURES Withstands contact heat up to 100°C, approved for handling foodstuffs, oil and grease



KNUCKLE DIPPED, **DOUBLE COATED PALM** 



EN 420:2003 + A1:2009



EN 388:2016 4121X



EN 407:2004







#### TEGERA® INFINITY 8804

Precision work glove with unique feel and high dexterity for oily jobs. Ultra light thanks to 18 gg knitting. Fully dipped with microfoam coated palm for better grip.

**DIPPING** Fully dipped, double-dipped

**DISPLAY** Bulk pack

DIPPING MATERIAL Nitrile, nitrile foam,

waterbased PU

LINING MATERIAL 18 gg, nylon, spandex

GRIP PATTERN Foam grip pattern

SIZE XS - XXL

LENGTH RANGE 220-270 mm

UNITS PER BUNDLE/CARTON 6 120 PAIRS

FEATURES Withstands contact heat up to 100°C, approved for handling foodstuffs, oil and grease resistant, thin



**FULLY DIPPED, DOUBLE COATED PALM** 





C Cat. II UK EN ISO 21420:2020



EN 388:2016+A1:2018 4121A



EN 407:2020 No Flame Protection













### **MECHANICAL PROTECTION: ALL-ROUND WORK**

	DRY ENVIRONMENTS		WET/OILY ENVIRONMENTS
SYNTHETIC LEATHER Quality synthetic leather.	Microthan+  Excellent grip and fingertip sensitivity. Made from our high-tech synthetic leathers Microthan+.	Macrothan	ENVIRUNMENTS
	9125 Durable and ergonomic designed  Extreme grip in dry environments  Synthetic leather	9205 Ergonomic designed reinforcements  Extra protection for palm and knuckles	
	520 PU leather with good grip		Oil and water repellent palm, breathable backhand, excellent grip in oily environments
LEATHER Leather is strong, supple and adapts to changes in weather and temperatures.	Quality full grain goat leather  888 High quality durable cow leather leather  12 Goat leather good fit, cotton back	Heavy duty glove  106 Full grain cowhide, half-lined	6615 Full grain cowhide ★OGT*
KNITTED (AND DIPPED) Knitted gloves enable a very precise fit.			737 Nitrile, 15 gg, fully dipped, contact heat < 100°C

# TEGERA® MICROTHAN®+

Excellent grip and durability

MICROTHAN®+ is flexible and durable and has the same excellent properties as Microthan® but is thicker and has a grooved surface. The material's principal property is its excellent grip. The flexibility of the material also allows a more advanced ergonomic design, contributing to safety and comfort. Microthan®+ is a synthetic material comprising a polyurethane coating with a knitted nylon backing. Microthan®+ is 0,7 mm thick with grooved surface, and is ideal for allround work.



#### **FLEXIBLE**

Microthan®+ allows advanced ergononmic design

#### **DURABLE**

Ideal for allround work

#### TEGERA® PRO 9125

Our most versatile allround glove, with a combination of hardwearing protection and flexibility.



#### Other Microthan®+ gloves:

#### TEGERA® PRO 9128

Waterproof cold insulated glove with touchscreen capability p. 61



**EXCELLENT GRIP** 

#### MECHANICAL PROTECTION | ALL-ROUND WORK: DRY ENVIRONMENTS

#### TEGERA® PRO 9125

Ergonomic, synthetic glove with Microthan+® and reinforced safety features. Long lasting thanks to the durable Microthan®+ synthetic leather.

DISPLAY Hook with hangtag
LINING MATERIAL Tricot
GRIP PATTERN Diamond grip pattern
SIZE S – 4XL
LENGTH RANGE 223-253 mm
UNITS PER BUNDLE/CARTON 6 60 PAIRS

FEATURES Chrome free, reinforced index finger, reinforced seams, reinforced fingers and thumb, padded palm, pre-curved fingers, specially designed thumb, knuckle protection, ergonomically shaped, reflector, specially designed details




PERFECT FOR HAND-HELD TOOLS

MICROTHAN®+






EN ISO 21420:2020





# TEGERA® GRIPFORCE®

Exceptional grip in dry environments



#### COMFORT

The back material in polypropylene is very soft and flexible

#### GRIP

GRIPFORCE® provides exceptional grip in dry environments



#### DURABILITY

The thin GRIPFORCE® laminate is extremely durable and resistant



#### MECHANICAL PROTECTION | ALL-ROUND WORK: DRY ENVIRONMENTS

#### TEGERA® PRO 9102

This synthetic leather glove in Microthan®+ has reinforced seams. It comes with an extra layer of diamond-patterned Gripforce® in the palm which makes the grip excellent.

DISPLAY Hook with hangtag
GRIP PATTERN Diamond grip pattern
SIZE S – 3XL
LENGTH RANGE 184-225 mm
UNITS PER BUNDLE/CARTON 6 60 PAIRS

**FEATURES** Chrome free, reinforced index finger, reinforced palm, reinforced seams, reinforced fingers and thumb, pre-curved fingers, specially designed thumb



A GLOVE THAT NEVER LOSES ITS GRIP

**GRIP**FORCE®

MICROTHAN®+





EN ISO 21420:2020





#### **TEGERA® PRO 9205**

This synthetic leather glove in Macrothan®+ has extra protection for the knuckles and a padded inner hand which makes it perfect for working with handheld tools.

**DISPLAY** Hook with hangtag

SIZE S - XXL

LENGTH RANGE 200-240 mm

UNITS PER BUNDLE/CARTON 6 60 PAIRS

FEATURES Chrome free, reinforced index finger, reinforced palm, reinforced seams, reinforced

 $fingertips, reinforced fingers \ and \ thumb, \ padded$ palm, pre-curved fingers, specially designed thumb, knuckle protection, ergonomically shaped, reflector, soft, specially designed details



MACROTHAN®+



EN 420:2003 + A1:2009



EN 388:2016 2142X



#### TEGERA® 520

This precision work glove is made in synthetic leather and can be used together with touchscreens. It is unlined and has good fingertip sensitivity.

**DISPLAY** Hook with hangtag

SIZE XS - 3XL

LENGTH RANGE 210-250 mm

UNITS PER BUNDLE/CARTON 6 60 PAIRS

FEATURES For touchscreen







EN 420:2003 + A1:2009



EN 388:2016 0X31A

#### TEGERA® 640

 $Leather glove, unlined, 0,7-0,8 \, mm \, full \, grain \, go at skin, \, Cat. \, II, \, reinforced \, index \, finger, \, reinforced \,$ seams, for assembly work

**DISPLAY** Thread

SIZE S - XXL

LENGTH RANGE 230-260 mm

UNITS PER BUNDLE/CARTON 12 120 PAIRS

FEATURES Reinforced index finger, reinforced
















#### MECHANICAL PROTECTION | ALL-ROUND WORK: DRY ENVIRONMENTS

#### ■ TEGERA® 888

A strong, very soft, and very durable high-quality leather glove with pulltab for easy donning. Perfect for all-round and assembly work.

DISPLAY Hook with hangtag

SIZE XS - 3XL

LENGTH RANGE 225-280 mm

UNITS PER BUNDLE/CARTON 12 120 PAIRS

FEATURES With stands contact heat up to 100  $^{\circ}$ C,

reinforced fingers and thumb



STRONG, VERY SOFT, **AND VERY DURABLE** 










EN ISO 21420:2020







#### TEGERA® 12

Leather glove, mil full grain goatskin, cotton, Cat. II, reinforced fingertips, for assembly work

**DISPLAY** Thread


SIZE S - XXL

LENGTH RANGE 225-270 mm

UNITS PER BUNDLE/CARTON 12 120 PAIRS

**FEATURES** Reinforced fingertips















#### TEGERA® 106

Comfortable quality leather glove for rough jobs. Durable full grain cowhide on palm for  $protection\ against\ abrasions.\ Cotton\ jersey\ back\ and\ liner\ for\ improved\ breathability\ and\ sweat$ management.

**DISPLAY** Thread LINING MATERIAL Jersey SIZE S - 6XL

LENGTH RANGE 220-290 mm

UNITS PER BUNDLE/CARTON 6 60 PAIRS


FEATURES Reinforced index finger, reinforced fingers and thumb















#### MECHANICAL PROTECTION | ALL-ROUND WORK: WET/OILY ENVIRONMENTS

#### TEGERA® 6615

Top quality oil repellent full leather glove. Perfect for good grip in harsh, slippery, oily, and greasy

**DISPLAY** Thread SIZE XS - 3XL

LENGTH RANGE 220-275 mm

UNITS PER BUNDLE/CARTON 6 60 PAIRS FEATURES Water and oil repellent




FOR GOOD GRIP IN OILY **ENVIRONMENTS** 















#### TEGERA® 737

Excellent multi-purpose glove for wet and oily environments. Fully nitrile dipped for durable protection. Sandy finish on palm for enhanced grip.

**DIPPING** Fully dipped, double-dipped **DISPLAY** Bag with euro slot **DIPPING MATERIAL** Nitrile LINING MATERIAL 15 gg, nylon **GRIP PATTERN** Sandy finish SIZE XS - XXL

LENGTH RANGE 220-260 mm UNITS PER BUNDLE/CARTON 12 120 PAIRS FEATURES Water and oil repellent, soft




**FULLY DIPPED, SANDY FINISH ON PALM** 







EN ISO 21420:2020







#### TEGERA® 882

Glove for allround work with great resistance against water, oil, and grease thanks to the full dipping. The elastic wristlet makes it easy to put on and take off the glove.

**DIPPING** Fully dipped **DISPLAY** Bag with euro slot **DIPPING MATERIAL** Nitrile foam LINING MATERIAL 15 gg, nylon **GRIP PATTERN** Micro foam grip pattern SIZE S - XXL

LENGTH RANGE 230-260 mm UNITS PER BUNDLE/CARTON 12 60 PAIRS FEATURES Withstands contact heat up to 100°C, water and oil repellent



**CUTA** 

**FULLY DIPPED, SMART ELASTIC WRISTLET** 








C Cat. II UK EN ISO 21420:2020



EN 388:2016+A1:2018







#### DRY TO LIGHT MOIST ENVIRONMENTS MOIST/LIGHT OILY ENVIRONMENTS WET/OILY ENVIRONMENTS **⊘**cut B For handling small and large sharp objects 432 PU, 13 gg, palm-dipped □CRF® 8805 43001 433 430 8806 PU, 13 gg, Nitrile, 18 gg, PU, 13 gg, PU, 13 gg, palm-dipped ³¼ dipped, contact heat < 100°C palm-dipped, contact heat < 100°C palm-dipped palm-dipped △CRF® CRF° Ultra thin cut protection gloves 905 906 909 PU, 18 gg, palm-dipped, Bio-Based Dyneema® PU, 18 gg, palm-dipped, Bio-Based Dyneema® PU, 18 gg, palm-dipped, Bio-Based Dyneema® NEW For extra protection 132A / 134 Leather, welding, flame retardant, 8855/8855R 215 666 against sharp Neoprene, 13 gg, palm-dipped, Cut D, palm-dipped, contact heat < 100°C Neather the search of the sea Goat leather KEVLAR® FIBER Nitrile, 13 gg, objects palm-dipped contact heat < 100°C contact heat < 100°C ©CRF° \*OGT" ŮCRF° KEVLAR® FIBER KEVLAR® FIBER p.62 $\mathcal{Q}_{\mathsf{CUTD}}$ High cut protection level, for handling **8811** Nitrile, 15 gg, **465A** PU, 18 gg, 8807 8830R 8831R 7776 sharp and heavy Nitrile,15 gg Nitrile, 10 gg, Cut D, Latex, 10 gg, Cut D, Leather, objects impact-reducing, Poron® XRD® palm-dipped contact heat < 100°C palm-dipped, palm-dipped, contact heat palm-dipped, contact heat palm-dipped long cuff, contact heat < 100°C ©CRF® ₩ CRF° < 250°C <250°C ŮCRF° **∆CRF**° **∆CRF**° p.73 p.51 p.51 **CUTE** NEW High cut protection 8844 2010 7773 level, for handling PU, 13 gg, Neoprene, Leather, 13 gg, palm-dipped, contact heat < 100°C impact-reducing, Poron® XRD® sharp and heavy palm-dipped objects Ď CRF° KEVLAR® FIBER Nomex. Kevlar. p.77 **CUTF** High cut protection 8815 8814 8845 8846 411 level, for handling PU, 18 gg, PU, 21 gg, Leather on palm Nitrile, 18 gg, Nitrile, 13 gg, palm-dipped, area, 13 gg, long cuff, contact heat < 100°C contact heat < 100°C sharp and heavy palm-dipped, palm-dipped palm-dipped objects. CRF° 2 CRF° 2 CRF° ∆crf° **₽ ∆CRF**°

	COLD ENVIRONMENTS	HOT ENVIRONMENTS	INSPECTION/ INNER GLOVES/SLEEVES
441  Nitrile, 13 gg, ¾ dipped, contact heat < 100°C ĈÜCRF°		5127 Premium quality goat leather, welding, contact heat < 100°C	8840 70 18 gg 13 gg □ CRF°
protection		oil repellent	
7363 Nitrile, 18 gg. 24 dipped, contact heat <100°C Contact heat <	Synthetic leather, HPPE	132A / 134 Leather, welding, flame retardant, contact heat < 100°C KEVLAR® FIBER (100°C) p.69 p.44  7780 Leather, flame retardant, contact heat < 250°C p.69  KEVLAR® FIBER (100°C) KEVLAR® FIBER p.62	910 913 High visibility colour, 13 gg CCRF°  913 Long cuff, 13 gg CCRF°
8808 8812 Nitrile, 15 gg, Nitrile, 15 gg, fully dipped, contact heat < 100°C contact heat < 100°C	8830R / 8831R Latex, 10 gg, Cut D, palm-dipped, contact heat < 250°C  DICRF*  p.51  8832R Latex, 10 gg/13 gg, Cut D, 3/4 dipped, contact heat < 250°C  p.56	7776 Leather, impact-reducing, Poron* XRD*  CRF*  P.73	72 10 gg □GRF*  13 gg. contact heat <100°C KEVLAR* FIBER
7775 Leather, impact-reducing, Poron® XRD® KEVLAR* FIBER  p.77	7799 Leather, HPPE  p.55	NEW  Neoprene, 13 gg, palm-dipped, contact heat < 100°C  Nomex. Kevlar.	73 10 g ÈCRF°
987 Nitrile, 7 gg, palm-dipped, long cuff, Para-aramid, contact heat < 250°C  p.63	987 Nitrile, 7 gg palm-dipped, long cuff, Para-aramid, contact heat < 250°C	987 Nitrile, 7 gg, palm-dipped, long cuff, Para-aramid, contact heat < 250°C  p.63	

# TEGERA® CRF® **TECHNOLOGY**

Our CRF ® (Cut Resistant Fiber) Technology is designed to provide excellent tactile sensitivity, together with the right level of high-performance cut protection for any type of job.

#### **TEGERA® INFINITY 8814**

Highest cut protection level F with superior softness and dexterity



#### **CUT PROTECTION | DRY ENVIRONMENTS**

#### TEGERA® INFINITY 8805

Dexterous 18 gg knitted glove with CRF® cut resistant technology for precision work. Palm dipped with super soft nitrile foam, provides excellent grip on dry surfaces.

**DIPPING** Palm-dipped

**DISPLAY** Bulk pack

 $\textbf{DIPPING MATERIAL} \ Nitrile \ foam, waterbased \ PU$ LINING MATERIAL 18 gg, carbon, CRF®

Technology, HPPE, nylon, stainless steel fibre

**GRIP PATTERN** Foam grip pattern

SIZE XXS - XXL

LENGTH RANGE 210-270 mm

UNITS PER BUNDLE/CARTON 6 120 PAIRS

FEATURES Withstands contact heat up to 100°C, approved for handling foodstuffs, for touchscreen, reinforcement between index finger and thumb, thin



**CUTB** 

**SUPER SOFT, PALM DIPPED, CUT B GLOVE** 









EN 420:2003



EN 388:2016



EN 407:2004 X1XXXX











#### **TEGERA® 433**

Cut resistant glove, PU, palm-dipped, smooth finish, cut resistance level B, 13 gg, CRF® Technology, nylon, spandex, Cat. II, silicone-free, breathable back, water and oil repellent palm, for fine assembly work

**DIPPING** Palm-dipped **DISPLAY** Bulk pack

**DIPPING MATERIAL** PU

LINING MATERIAL 13 gg, CRF® Technology, HPPE, nylon, spandex

**GRIP PATTERN** Smooth finish

SIZE XXS - 3XL

LENGTH RANGE 220-270 mm

UNITS PER BUNDLE/CARTON 1272 PAIRS



**CUTB** 





EN ISO 21420:2020



EN 388:2016+A1:2018 4X43B







#### TEGERA® 430

Our most popular cut resistant glove for versatile applications. High comfort thanks to the design  $% \left\{ \left( 1\right) \right\} =\left\{ \left( 1\right) \right$ and CRF® Technology. PU palm dipped with good grip on dry/moist surfaces.

**DIPPING** Palm-dipped **DISPLAY** Bag with euro slot

LENGTH RANGE 220-270 mm

SIZE XXS - XXL

**DIPPING MATERIAL** PU

**UNITS PER BUNDLE/CARTON 12 120 PAIRS** 

LINING MATERIAL 13 gg, CRF® Technology, HPPE, nylon, polyester, spandex

**GRIP PATTERN** Smooth finish



PU PALM DIPPED, **GOOD GRIP AND COMFORT** 



**CUTB** 

#### 





EN ISO 21420:2020



EN 388:2016+A1:2018 4X42B





#### **TEGERA®** 43001

Our most popular cut resistant glove for versatile applications. High comfort thanks to the design and CRF  $^{\circ}$  Technology. PU palm dipped with good grip on dry/moist surfaces..

**DIPPING** Palm-dipped

**DISPLAY** Bulk pack

**DIPPING MATERIAL** PU

UNITS PER BUNDLE/CARTON 12 120 PAIRS

LINING MATERIAL 13 gg, CRF® Technology, HPPE,

nylon, polyester, spandex **GRIP PATTERN** Smooth finish SIZE XXS - XXL

LENGTH RANGE 220-270 mm





PU PALM DIPPED, **GOOD GRIP** 









EN ISO 21420:2020



EN 388:2016+A1:2018





#### TEGERA® 432

Cut resistant glove in white color for versatile applications. High comfort thanks to the design and CRF® Technology. PU palm dipped with good grip on dry/moist surfaces.

**DIPPING** Palm-dipped

**DISPLAY** Bulk pack **DIPPING MATERIAL** PU

LINING MATERIAL 13 gg, CRF® Technology, HPPE,

nylon, spandex

**CRF®** 

**GRIP PATTERN** Smooth finish

SIZE XXS - XXL LENGTH RANGE 220-270 mm UNITS PER BUNDLE/CARTON 12 60 PAIRS



WHITE COLOR **FOR EASIER DIRT DETECTION** 









EN ISO 21420:2020



EN 388:2016+A1:2018 4X42B





PROTECTIVE HAND AND FOOTWEAR PRODUCT CATALOG 2025 | 35 | GLOVES

# **BIO-BASED DYNEEMA® FIBER**

### Made from trees

The new Bio-based Dyneema® fibre from DSM is the first ever bio-based ultra-high molecular weight polyethylene (HMPE) fibre. This innovation enables customers to reduce their carbon footprint. By applying Dyneema® Diamond Technology to the fibre, spinning specially engineered microparticles into a polymer, the cut resistance more than doubles when compared to conventional Dyneema® fibres. This unique polymer provides ultra-thin cut resistant material, high strength, high abrasion and superior fingertip sensitivity and cool-touch comfort.



#### TEGERA® 905

Thin and dexterous cut protection glove for fine assembly work with small sharp objects. Made with the world's first bio-based cut protection fiber - Dyneema  $^{\! \circ}\! .$ 

**DIPPING** Palm-dipped **DISPLAY** Bulk pack

**DIPPING MATERIAL** PU LINING MATERIAL 18 gg, Bio-Based Dyneema®, Dyneema® Diamond Technology, nylon, spandex

**GRIP PATTERN** Smooth finish

SIZE XXS - XXL

LENGTH RANGE 210-250 mm

**UNITS PER BUNDLE/CARTON 12 120 PAIRS** 

FEATURES Ultra thin, super soft



THIN WITH BIO-BASED **CUT PROTECTION** 













EN 388:2016+A1:2018





#### TEGERA® 906

Our thinnest and most dexterous cut protection glove for fine assembly work with small sharp objects. Made with the world's first bio-based cut protection fiber - Dyneema®.

**DIPPING** Palm-dipped **DISPLAY** Bulk pack **DIPPING MATERIAL** PU

LINING MATERIAL 18 gg, Bio-Based Dyneema®, Dyneema® Diamond Technology, nylon, spandex

**GRIP PATTERN** Smooth finish

SIZE XXS - XXL

LENGTH RANGE 210-250 mm

UNITS PER BUNDLE/CARTON 12 120 PAIRS

FEATURES Ultra thin, super soft



**CUTB** 

THIN WITH BIO-BASED **CUT PROTECTION** 









EN ISO 21420:2020



EN 388:2016+A1:2018







#### TEGERA® 909

 $Thin and \ dexterous \ cut \ protection \ glove \ for \ fine \ assembly \ work \ with \ small \ sharp \ objects. \ Made$ with the world's first bio-based cut protection fiber - Dyneema®.

**DIPPING** Palm-dipped **DISPLAY** Bulk pack **DIPPING MATERIAL** PU

LINING MATERIAL 18 gg, Bio-Based Dyneema®, Dyneema® Diamond Technology, nylon, spandex

**GRIP PATTERN** Smooth finish

SIZE XXS - XXL

LENGTH RANGE 210-270 mm

UNITS PER BUNDLE/CARTON 12 120 PAIRS

FEATURES Ultra thin, super soft



THIN WITH BIO-BASED **CUT PROTECTION** 









EN ISO 21420:2020











**CUTB** 

#### TEGERA® INFINITY 8806

Dexterous 18 gg knitted glove with CRF® cut resistant technology. Knuckled dipped with super soft nitrile foam and coated palm for good grip in greasy and oily environments.

DIPPING 3/4 dipped, double-dipped

**DISPLAY** Bulk pack

DIPPING MATERIAL Nitrile, nitrile foam,

waterbased PU

LINING MATERIAL 18 gg, carbon, CRF® Technology, HPPE, nylon, stainless steel fibre

GRIP PATTERN Foam grip pattern

SIZE XS - XXL

LENGTH RANGE 220-270 mm

**UNITS PER BUNDLE/CARTON** 6 120 PAIRS


FEATURES Withstands contact heat up to 100°C, approved for handling foodstuffs, reinforcement between index finger and thumb, oil and grease



**SOFT, KNUCKLE DIPPED CUT B GLOVE** 










EN ISO 21420:2020



EN 388:2016+A1:2018















■ TEGERA® 441

A cut protection glove with high durability that is suitable for work in oily and greasy environments. Nitrile dipped knuckle and palm, sandy finish for good grip. Withstands contact heat up to 100°C/212°F.

DIPPING 3/4 dipped, double-dipped

**DISPLAY** Bulk pack

DIPPING MATERIAL Nitrile, nitrile foam LINING MATERIAL 13 gg, CRF® Technology, HPPE,

nylon, spandex **GRIP PATTERN** Sandy finish SIZE XS - XXL

LENGTH RANGE 230-275 mm

UNITS PER BUNDLE/CARTON 6 60 PAIRS

FEATURES Withstands contact heat up to 100°C,

oil and grease resistant



**CUT PROTECTION GLOVE FOR OILY ENVIRONMENTS** 





EN 420:2003



EN 388:2016



EN 407:2004 X1XXXX

#### **CUT PROTECTION | DRY ENVIRONMENTS**

#### TEGERA® 215

 $Cut \ resistant \ glove, fully \ lined, full \ grain \ goatskin \ of \ top \ quality, polyester, cut \ resistance \ level \ C,$ KEVLAR® fiber, Cat. II, reinforced index finger, reinforced fingertips, for precision work

**DISPLAY** Thread

LINING MATERIAL KEVLAR® fiber

SIZE S - 3XL

LENGTH RANGE 210-260 mm

UNITS PER BUNDLE/CARTON 12 120 PAIRS

FEATURES Reinforced index finger, reinforced

fingertips



**CUTC** 



















#### **CUT PROTECTION | DRY TOO LIGHT MOIST ENVIRONMENTS**

#### TEGERA® 450

Glove with high CRF cut protection for versatile assembly work. Knitted with 13gg CRF® Technology for solid cut C performance. Durable nitrile foam coating on palm for improved grip performance.

**DIPPING** Palm-dipped

**DISPLAY** Bag with euro slot

**DIPPING MATERIAL** Nitrile foam

LINING MATERIAL 13 gg, CRF® Technology, glass fibre thread, HPPE, nylon, polyester, spandex

**GRIP PATTERN** Smooth finish

SIZE XXS - XXL

LENGTH RANGE 220-270 mm

UNITS PER BUNDLE/CARTON 12 120 PAIRS

FEATURES Withstands contact heat up to 100°C



**CUT AND HEAT PROTEC-TION COMBINED** 

**CUTC** 







EN ISO 21420:2020



EN 388:2016+A1:2018 4X44C











#### TEGERA® 465A

Thin knitted cut protection glove (D) with great dexterity for precision work. CRF® cut resistance Technology. PU palm dipped in smooth finish with touch screen function.

**DIPPING** Palm-dipped

**DISPLAY** Bulk pack

**DIPPING MATERIAL** PU

LINING MATERIAL 18 gg, CRF® Technology, HPPE, nylon, spandex, stainless steel fibre yarn

**GRIP PATTERN** Smooth finish

SIZE XXS - 3XL

LENGTH RANGE 215-280 mm

**UNITS PER BUNDLE/CARTON** 6 60 PAIRS

FEATURES For touchscreen, reinforcement between index finger and thumb, thin



CUTD

FOR GREAT DEXTERITY IN PRECISION WORK





**CUTC** 







EN ISO 21420:2020



EN 388:2016+A1:2018









#### **CUT PROTECTION | MOIST/LIGHT OILY ENVIRONMENTS**

#### NEW TEGERA® OILGRIP 8855

Excellent grip in dry, moist, and slightly oily environments. Cut resistant level C, single dipped with nitrile foam in the palm and re-enforcement between thumb and index finger.

**DIPPING** Palm-dipped **DISPLAY** Bulk pack

**DIPPING MATERIAL** Nitrile foam

LINING MATERIAL 18 gg, CRF® Technology, glass fibre thread, HPPE, recycled polyester, spandex, stainless steel fibre yarn

GRIP PATTERN Foam grip pattern

SIZE XS - 3XL

LENGTH RANGE 210-270 mm

UNITS PER BUNDLE/CARTON 6 72 PAIRS

FEATURES For touchscreen, reinforcement between index finger and thumb, thin



**VERSATILE CUT C GLOVE** WITH TOUCHSCREEN **FUNCTIONALITY** 







\(\text{\text{CRF}}\)



**&**OGT™

EN ISO 21420:2020



EN 388:2016+A1:2018 4X43C













#### TEGERA® INFINITY 8807

Dexterous 15 gg knitted glove with CRF  $^{\circ}$  cut resistant technology for fine assembly work. Palm dipped with super soft nitrile foam, provides excellent grip on dry surfaces.

**DIPPING** Palm-dipped **DISPLAY** Bulk pack

 $\textbf{DIPPING MATERIAL} \ \text{Nitrile foam, waterbased PU}$ LINING MATERIAL 15 gg, CRF® Technology, glass fibre thread, HPPE, nylon, spandex

GRIP PATTERN Foam grip pattern

SIZE XXS - XXL

LENGTH RANGE 205-265 mm

**UNITS PER BUNDLE/CARTON** 6 120 PAIRS

FEATURES Withstands contact heat up to 100°C, approved for handling foodstuffs, reinforcement between index finger and thumb, thin



**CUTD** 

**SUPER SOFT, THIN GLOVE, CUT LEVEL D** 









EN ISO 21420:2020



EN 388:2016+A1:2018



TEN 407:2020 No Flame Protection











#### TEGERA® INFINITY 8811

Dexterous 15 gg knitted glove with long cuff and CRF® cut resistant technology for fine assembly work. Palm dipped with super soft nitrile foam, provides excellent grip on dry surfaces.

**DIPPING** Palm-dipped

**DISPLAY** Bulk pack

**DIPPING MATERIAL** Nitrile foam, waterbased PU

LINING MATERIAL 15 gg, CRF® Technology, glass fibre thread, HPPE, nylon, spandex

GRIP PATTERN Foam grip pattern

SIZE XXS - XXL

LENGTH RANGE 240-300 mm

UNITS PER BUNDLE/CARTON 6 120 PAIRS

FEATURES Withstands contact heat up to 100°C, approved for handling foodstuffs, extra long, reinforcement between index finger and thumb, thin



CUTD

**SUPER SOFT, LONG CUFF, CUT LEVEL D** 










EN ISO 21420:2020



EN 388:2016+A1:2018















CUTD

#### CUT PROTECTION | WET/OILY ENVIRONMENTS

#### **TEGERA** INFINITY 8808

Dexterous 15 gg knitted glove with CRF $^\circ$  cut resistant technology. Knuckled dipped with super soft nitrile foam coated palm for good grip in greasy and oily environments.

DIPPING 3/4 dipped, double-dipped

**DISPLAY** Bulk pack

DIPPING MATERIAL Nitrile, nitrile foam,

waterbased PU

LINING MATERIAL 15 gg, CRF® Technology, glass fibre thread, HPPE, nylon, spandex

GRIP PATTERN Foam grip pattern

SIZE XS - XXI

LENGTH RANGE 215-265 mm

**UNITS PER BUNDLE/CARTON** 6 120 PAIRS

FEATURES Withstands contact heat up to 100°C, approved for handling foodstuffs, reinforcement between index finger and thumb, oil and grease resistant, anatomically designed



**SOFT, KNUCKLE DIPPED, CUT D GLOVE** 









EN ISO 21420:2020



EN 388:2016+A1:2018 4X43D















#### **CUT PROTECTION | WET/OILY ENVIRONMENTS**

#### ■ TEGERA® INFINITY 8812

Dexterous 15 gg knitted glove with CRF® cut resistant technology. Fully dipped with super soft  $nitrile\ foam\ coated\ palm\ for\ good\ grip\ in\ greasy\ and\ oily\ environments.$ 

**DIPPING** Fully dipped, double-dipped

**DISPLAY** Bulk pack

DIPPING MATERIAL Nitrile, nitrile foam,

 $waterbased\,PU$ 

LINING MATERIAL 15 gg, CRF® Technology, glass

fibre thread, HPPE, nylon, spandex

GRIP PATTERN Foam grip pattern

SIZE XS - XXL

LENGTH RANGE 225-275 mm

**UNITS PER BUNDLE/CARTON** 6 120 PAIRS

FEATURES Withstands contact heat up to 100°C, approved for handling foodstuffs, reinforcement between index finger and thumb, oil and grease resistant, anatomically designed



**CUTD** 

**SOFT, FULLY DIPPED, CUT D GLOVE** 





**CRF**®






EN ISO 21420:2020



EN 388:2016+A1:2018 4X43D















#### **CUT PROTECTION | DRY TOO LIGHT MOIST ENVIRONMENTS**

#### ■ TEGERA® 8844

Thin and dexterous cut protection glove (cut E) made with the new advanced CRF®Omni technology. PU-dipped for good grip in dry/damp and slightly oily environments.

**DIPPING** Palm-dipped **DISPLAY** Bulk pack

**DIPPING MATERIAL** PU LINING MATERIAL 13 gg, CRF® Omni Technology,

HPPE, polyester, spandex **GRIP PATTERN** Smooth finish SIZE XXS - XXL

LENGTH RANGE 220-280 mm

**UNITS PER BUNDLE/CARTON** 6 72 PAIRS

**FEATURES** Reinforcement between index finger

and thumb, soft



CUTE

**PU DIPPED CUT E GLOVE** 











EN ISO 21420:2020



EN 388:2016+A1:2018 4X43E





#### NEW TEGERA® 2010

The Arc Flash glove features Nomex®, a high-performance fiber renowned for high burning protection. Withstands up to 11 cal/cm<sup>2</sup>, Arc category level 2.

**DIPPING** Palm-dipped

**DISPLAY** Hook with hangtag

**DIPPING MATERIAL** Neoprene

LINING MATERIAL 13 gg, glass fibre thread, KEVLAR® fiber, modacrylic, Nomex®, spandex

GRIP PATTERN Foam grip pattern

SIZE XS - XXL

LENGTH RANGE 220-260 mm

**UNITS PER BUNDLE/CARTON 12 60 PAIRS** 

FEATURES Withstands contact heat up to 100°C, flame retardant, heat-resistant



**HIGH PROTECTION FOR ARC FLASH HAZARDS** 



## Nomex.





EN ISO 21420:2020



EN 388:2016+A1:2018 3X41E



EN 407:2020 4131XX







ASTM F2675-23

**DIPPING** Palm-dipped **DISPLAY** Bulk pack **DIPPING MATERIAL** PU

LINING MATERIAL 18 gg, CRF® Omni Technology, HPPE, nylon, spandex

**GRIP PATTERN** Smooth finish

SIZE XXS - XXL

LENGTH RANGE 210-270 mm

UNITS PER BUNDLE/CARTON 6 120 PAIRS

FEATURES For touchscreen, reinforcement between index finger and thumb, ultra thin, super













EN ISO 21420:2020



EN 388:2016+A1:2018 3X43F







Cut protection glove (cut F) with extended cuff made with CRF cut-resistant technology. Leather in palm for extra protection when handling bulky and heavy metal pieces.

**DISPLAY** Bulk pack

LINING MATERIAL 13 gg, CRF® Technology, glass fibre thread, HPPE, polyester, spandex, stainless steel fibre yarn

SIZE XS - XXL

LENGTH RANGE 260-300 mm

**UNITS PER BUNDLE/CARTON** 6 72 PAIRS

FEATURES Withstands contact heat up to 100°C, extra long, reinforced palm



**CUTF** 

**CUT LEVEL F** WITH LEATHER **IN PALM** 



## 







EN ISO 21420:2020



EN 388:2016+A1:2018











#### **TEGERA® INFINITY 8814**

Dexterous 13 gg knitted glove with CRF® cut resistant technology. Palm dipped with super soft nitrile foam. Suitable for all-round work in dry/slightly moist environments.

**DIPPING** Palm-dipped **DISPLAY** Bulk pack

**DIPPING MATERIAL** Nitrile foam, waterbased PU LINING MATERIAL~13~gg, basalt~fibre~thread,

CRF® Technology, HPPE, polyester, spandex, stainless steel fibre yarn  $\textbf{GRIP PATTERN} \, \mathsf{Foam} \, \mathsf{grip} \, \mathsf{pattern}$ 

SIZE XXS - XXL

LENGTH RANGE 220-270 mm

UNITS PER BUNDLE/CARTON 6 120 PAIRS

FEATURES Withstands contact heat up to 100°C, approved for handling foodstuffs, for touchscreen, reinforcement between index finger



**GREAT FIT, PALM DIPPED, CUT F GLOVE** 






























# **TEGERA CRF® OMNI TECHNOLOGY**

A second skin for everyday heroes

The CRF Omni glove material is exceptionally flexible, airy, and so comfortable, like a second skin. Gloves in this material is ideal for work with sheet metals, for use in paper mills, and metal fabrication in the auto industry.

#### **TEGERA® INFINITY ™ 8815**

Perfect for handling very sharp objects.

- Unique Infinity <sup>™</sup> dipping technique for extra softness and flexibility
- · Highest Highest level of cut resistance (F)
- Made from 18gg

CRF® Omni Technology fiber

- Foam grip pattern for good grip
- Withstand contact heat up to 100°C
- Carefully tested and approved for food handling
- · Skin-friendly and DMF-free



#### CUT PROTECTION | DRY TOO LIGHT MOIST ENVIRONMENTS

#### TEGERA® 8846

The world's thinnest cut F glove has 21 gg knitting. Perfect for high precision work with very small and very sharp objects.

**DIPPING** Palm-dipped **DISPLAY** Bulk pack

LINING MATERIAL 21 gg, CRF® Omni Technology, HPPE, nylon, spandex

**GRIP PATTERN** Smooth finish

**SIZE** XS - 3XI

LENGTH RANGE 215-245 mm

**UNITS PER BUNDLE/CARTON** 6 120 PAIRS

FEATURES For touchscreen, reinforcement between index finger and thumb, ultra thin, super



**CUTF** 

THE WORLD'S **THINNEST CUT F GLOVE** 













EN ISO 21420:2020



EN 388:2016+A1:2018





#### **TEGERA® INFINITY 8815**

Dexterous 18 gg knitted glove with CRF®Omni cut resistant technology for precision work. Palm dipped with super soft nitrile foam, provides excellent grip on dry surfaces.

**DIPPING** Palm-dipped

**DISPLAY** Bulk pack

**DIPPING MATERIAL** Nitrile foam, waterbased PU LINING MATERIAL 18 gg, CRF® Omni Technology, HPPE, nylon, spandex

**GRIP PATTERN** Foam grip pattern

SIZE XS - XXL

LENGTH RANGE 220-270 mm

**UNITS PER BUNDLE/CARTON** 6 120 PAIRS

FEATURES Withstands contact heat up to 100°C, approved for handling foodstuffs, reinforcement between index finger and thumb, ultra thin, super



CUT **F** 

**OUR THINNEST NITRILE DIPPED CUTF** 







EN 420:2003 + A1:2009



EN 388:2016 4X43F













# WELDING/ HEAT-RESISTANT GLOVES

#### CUT RESISTANT GLOVES, HEAT PROTECTION GLOVES, WELDING GLOVES

#### TEGERA® 134

Superior welding and cut protection (C) glove for heavy-duty jobs. Thin full grain goat suede provides excellent tactility. KEVLAR® liner inside the glove for extra heat and cut protection.

**DISPLAY** Thread LINING MATERIAL KEVLAR® fiber, Nomex® SIZE S - XXL LENGTH RANGE 395 mm

**UNITS PER BUNDLE/CARTON** 6 60 PAIRS

FEATURES Withstands contact heat up to 100°C, extra long, reinforced index finger, reinforced seams, water and oil repellent, withstands welding sparks and grinding splash



**CUTC** 

**SUPERIOR FOR WELDING AND CUT PROTECTION** 





## Kevlar





EN ISO 21420:2020



EN 388:2016+A1:2018 3X22C



EN 407:2020

EN 12477:2001 + A1:2005

Type A

EN 1149-2:1997  $R > 1.0 \times 10^6 \Omega$ 





CUT C

#### TEGERA® 132A

Top quality MIG welding glove for heat and cut protection (C) made of top-quality heat resistant full grain goat suede and premium heat resistant cow split.

**DISPLAY** Thread LINING MATERIAL KEVLAR® fiber SIZE S - 4XL LENGTH RANGE 310-370 mm

**UNITS PER BUNDLE/CARTON 12 60 PAIRS** FEATURES Withstands contact heat up to 100°C, reinforced seams, water and oil repellent



**WELDING GLOVE WITH CUT RESISTANCE C** 

**Kevlar** 







C **C** Cat. III **UK** EN 420:2003





EN 407:2004 41324X

EN 12477:2001 + A1:2005

Type A

EN 1149-2:1997 R:0.130x10°Ω







MIG welding glove made from quality goat grain with a cow split cuff. Reversed goat grain on palm, provides strength and grip. Cut protection level B. Flexible with a good fit.

LENGTH RANGE 310-370 mm

UNITS PER BUNDLE/CARTON 12 60 PAIRS

 $\textbf{FEATURES} \ \text{With stands contact heat up to 100} ^\circ\text{C},$ heat-resistant sewing thread, flame retardant, soft



**MIG GLOVE** WITH CUT PRO-**TECTION B** 







EN ISO 21420:2020



EN 388:2016+A1:2018



EN 407:2020 41224X







#### **WELDING GLOVES / HEAVY WEIGHT**





**TEGERA®** 7787

 $MIG\ welding\ high-quality\ glove\ with\ gun\ grip\ reinforcements,\ control\ patches\ and\ folded$ fingertips for high fingertip sensitivity. Heat resistant up to  $100^{\circ}$ C /212°F.

**DISPLAY** Hangtag with euro slot

SIZE S - 3XL Pairs

UNITS PER BUNDLE/CARTON 6 60 PAIRS

FEATURES Withstands contact heat up to 100°C,

heat-resistant sewing thread, reinforced seams

**CUTF** 

**MIG GLOVE** WITH HIGH CUT **PROTECTION** 











EN 388:2016+A1:2018 2X33F




EN 407:2020 413344

EN 12477:2001 + A1:2005

Type B





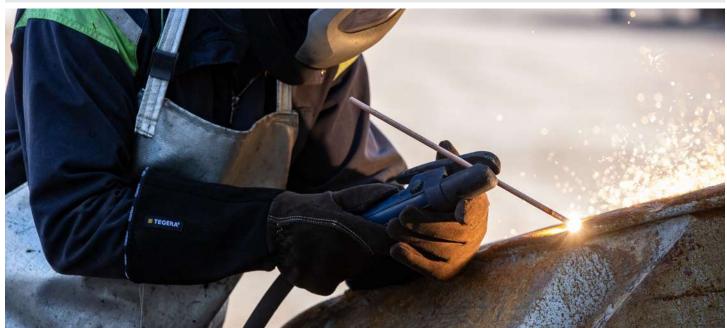

# INSPECTION / **INNER GLOVES / SLEEVES**

#### **CUT PROTECTION | INSPECTION/INNER GLOVES**

#### ■ TEGERA® 8840

Thin, dexterous cut B protection glove for inspection work or as an inner glove, made with the new advanced CRF®Omni technology. 18gg. No dipping. High-visibility cuff.

DISPLAY Bulk pack

LINING MATERIAL 18 gg, CRF® Omni Technology, HPPE, nylon, spandex

SIZE XXS - XXL

LENGTH RANGE 200-260 mm **UNITS PER BUNDLE/CARTON** 6 120 PAIRS

FEATURES Approved for handling foodstuffs, high visibility colour, ultra thin, super soft



**VERY THIN CUT B GLOVE, NO DIPPING** 



**CUTB** 







EN ISO 21420:2020



EN 388:2016+A1:2018













A soft and flexible liner glove with CRF® technology and cut protection level C. Without dipping for good fingertip feel. Suitable for all-round work in dry environments.

**DISPLAY** Bulk pack

LINING MATERIAL 13 gg, CRF® Technology, glass fibre thread, HPPE, polyester, spandex

SIZE XXS - XXL

LENGTH RANGE 220-270 mm

UNITS PER BUNDLE/CARTON 12 120 PAIRS

FEATURES High visibility colour, soft



**CUTC** 

**NO DIPPING, GOOD FINGERTIP FEEL** 











EN ISO 21420:2020



EN 388:2016+A1:2018







#### TEGERA® 913

Blue coloured cut resistant glove with extra-long cuff. Perfect for handling food stuffs. Combination of comfort and cut protection thanks to CRF® cut resistant Technology.

**DISPLAY** Bag with euro slot

LINING MATERIAL 13 gg, CRF® Technology, glass  $fibre\ thread,\ HPPE,\ polyester,\ spandex$ 

SIZE XS - XXL

**CRF**®

LENGTH RANGE 265-310 mm UNITS PER BUNDLE/CARTON 12 60 PAIRS FEATURES Approved for handling foodstuffs, extra long, soft





**FOOD APPROVED, CUT RESISTANT GLOVE** 









EN ISO 21420:2020



EN 388:2016+A1:2018











#### **CUT PROTECTION | SLEEVES**

#### TEGERA® 70

Cut protection sleeve, level B. 13 gg knitted, CRF® technology and basalt fibre yarn. With unique hand-attachment for allround work. Approved for handling foodstuffs.

**DISPLAY** Bulk pack

LINING MATERIAL 13 gg, basalt fibre thread, CRF® Technology, HPPE, nylon, polyester,

SIZE S - XL

LENGTH RANGE 420-490 mm

UNITS PER BUNDLE/CARTON 6 60 PIECES

**FEATURES** Approved for handling foodstuffs



#### **SLEEVE WITH CUT RESISTANCE LEVEL B**



**CUTB** 







EN 420:2003 + A1:2009



EN 388:2016 2X4XB









#### ■ TEGERA® 72

Cut protection sleeve, level D. 10 gg knitted with CRF® technology, basalt and steel fibre yarn. With unique hand-attachment for allround work. With food approval.

**DISPLAY** Bulk pack

LINING MATERIAL 10 gg, basalt fibre thread, CRF® Technology, HPPE, nylon, polyester, spandex, stainless steel fibre yarn

SIZE S - XL

LENGTH RANGE 420-490 mm

UNITS PER BUNDLE/CARTON 6 60 PIECES

FEATURES Approved for handling foodstuffs



**SLEEVE WITH CUT RE-**SISTANCE LEVEL D











EN 420:2003 + A1:2009



EN 388:2016 3X4XD







#### **TEGERA® 75**

Cut protection sleeve, level D. 13 gg knitted, Kevlar® fibre yarn. With unique hand-attachment for allround work. Food approved and withstands contact heat up to 100°C.

**DISPLAY** Bulk pack

LINING MATERIAL 13 gg, KEVLAR® fiber, spandex, stainless steel fibre yarn

SIZE S - XL

LENGTH RANGE 420-490 mm

UNITS PER BUNDLE/CARTON 6 60 PIECES

FEATURES Withstands contact heat up to 100°C, approved for handling foodstuffs



CUTD

**SLEEVE WITH KEVLAR®** FIBRE, CUT LEVEL D



### Kevlar.







EN 420:2003 + A1:2009



EN 388:2016+A1:2018 2X4XD



EN 407:2004 X1XXXX









#### TEGERA® 73

Cut sleeve with unique hand-attachment and cut resistance level F. CRF® technology and stainless-steel fibre yarn. For allround work and approved for handling foodstuffs.

**DISPLAY** Bulk pack

LINING MATERIAL 10 gg, CRF® Technology, HPPE, polyester, spandex, stainless steel fibre yarn SIZE S - XL

LENGTH RANGE 420-490 mm UNITS PER BUNDLE/CARTON 6 60 PIECES FEATURES Approved for handling foodstuffs



**CUTF** 

**SLEEVE WITH THE HIGHEST CUT RESIST-ANCE** 





**CRF®** 





EN 420:2003 + A1:2009



EN 388:2016 3X4XF











# **THERMAL PROTECTION: COLD**

	THERMAL PROTECTION: COLD							
Temperature	DRY TO SEMI-DRY ENVIRONMENTS							
Cool	417 PU leather with good grip  Purable syntethic suede with good grip  8830R Nitrile, 10 gg, Cut D, palm-dipped, contact heat < 250°C							
	7792 High quality goat leather, durable  Nitrile, 10 gg/15 gg, palm-dipped, contact heat < 100°C  Contact heat < 250°C							
Cold	9127 Microthan+, great grip							
Very Cold								
Extreme								

## **THERMAL PROTECTION: COLD**



#### ■ TEGERA® 417

Glove in high-quality synthetic leather, diamond pattern on the palm for a good grip. Double elastic around for a perfect fit. Soft, and provides excellent fingertip sensitivity.

**DISPLAY** Hook with hangtag LINING MATERIAL Fleece

 $\textbf{SIZE}\,\mathsf{M}-\mathsf{XXL}$ 

 $\textbf{LENGTH RANGE}\ 250\text{-}270\ \mathsf{mm}$ 

UNITS PER BUNDLE/CARTON 6 60 PAIRS

FEATURES Reinforced palm, soft





**QUALITY GLOVE THAT STAYS IN PLACE** 










EN ISO 21420:2020







## ■ TEGERA® 322

Assembly glove in synthetic leather, lined with fleece. Reinforced index finger for better durability and elastic band for a secure fit.

**DISPLAY** Hook with hangtag LINING MATERIAL Fleece SIZE M - XXL

LENGTH RANGE 230-260 mm

UNITS PER BUNDLE/CARTON 6 60 PAIRS

FEATURES Reinforced index finger, soft






**FOR TASKS IN COLD ENVIRONMENTS** 















#### **TEGERA®** DYNAMIC STRENGTH **7792**

Leather glove, fully lined, 0,6-0,8 mm full grain goatskin, spandex, fleece, Cat. II, reinforced index finger, reinforced fingertips, winter-lined, for allround work

**DISPLAY** Hangtag with euro slot LINING MATERIAL Fleece

SIZE S - 3XL

LENGTH RANGE 220-270 mm

UNITS PER BUNDLE/CARTON 6 60 PAIRS

FEATURES Reinforced index finger, reinforced fingertips









Cat. II EN 420:2003 + A1:2009





EN 511:2006 11X

Ploo

#### THERMAL PROTECTION | COOL AND DRY TO SEMI-DRY ENVIRONMENTS

#### TEGERA® INFINITY 8810

Winter lined glove with super soft nitrile foam palm dipping for the cold season or in cool work areas. Designed for versatile work in dry to semi-dry environments.

**DIPPING** Palm-dipped

**DISPLAY** Bulk pack

DIPPING MATERIAL Nitrile foam, waterbased PU LINING MATERIAL 10 gg, 15 gg, acrylic, fleece,

nylon, spandex

GRIP PATTERN Foam grip pattern

SIZE S - XXL

LENGTH RANGE 235-275 mm

**UNITS PER BUNDLE/CARTON** 6 120 PAIRS

FEATURES Withstands contact heat up to 100°C,

approved for handling foodstuffs





**SUPER SOFT WINTER GLOVE, PALM DIPPED** 





EN 420:2003 + A1:2009



EN 388:2016 4221X



EN 407:2004 X1XXXX



EN 511:2006 X2X







#### ■ TEGERA® 8830R

Glove with cold protection in combination with high cut protection (Level D), nitrile-foam palm dipped with pattern for good grip. 10 gg and CRF cut resistance technology.

**DIPPING** Palm-dipped

DISPLAY Hangtag with euro slot

**DIPPING MATERIAL** Nitrile foam

LINING MATERIAL 10 gg, acrylic, CRF® Technology, HPPE, polyester, stainless steel

GRIP PATTERN Foam grip pattern

SIZE XS - 3XL

LENGTH RANGE 250-285 mm

UNITS PER BUNDLE/CARTON 6 72 PAIRS

FEATURES Withstands contact heat up to 250°C, approved for handling foodstuffs, reinforcement between index finger and thumb







AT RISK OF **CUTS WHEN IT** IS COLD AND **DRY** 











EN ISO 21420:2020



EN 388:2016+A1:2018

4X42D











#### ■ TEGERA® 8831R

Glove with cold protection in combination with high cut protection (Level D). Palm dipped in Latex, for dry and moist environments. 10 gg and CRF cut resistance technology.

**DISPLAY** Hangtag with euro slot

**DIPPING MATERIAL** Latex

LINING MATERIAL 10 gg, acrylic, CRF® Technology, HPPE, polyester, stainless steel

fibre yarn

**GRIP PATTERN** Sandy finish

SIZE S - 3XL

LENGTH RANGE 240-275mm

UNITS PER BUNDLE/CARTON 6 72 PAIRS

FEATURES Withstands contact heat up to 250°C







**WARM AND SAFE WHEN IT'S DRY AND** MOIST











EN ISO 21420:2020



EN 388:2016+A1:2018 1X42D









#### TEGERA® PRO 9122

Ergonomic, water-repellent winter glove featuring Microthan®+. The durable Microthan®+ synthetic leather provides excellent grip thanks to the diamond grip pattern.

**DISPLAY** Hook with hangtag LINING MATERIAL Fleece GRIP PATTERN Diamond grip pattern  $\textbf{SIZE}\, S - XXL$ 

FEATURES Chrome free, reinforced index finger, reinforced seams, reinforced fingertips, pre-curved fingers, specially designed thumb, water repellent, ergonomically shaped, reflector, specially designed details









LENGTH RANGE 242-282 mm UNITS PER BUNDLE/CARTON 6 60 PAIRS

MICROTHAN®+





EN ISO 21420:2020



EN 388:2016+A1:2018 2211X





#### TEGERA® 517

 $Short \, model \, with \, hook \, and \, loop \, fastening \, ensures \, that \, the \, glove \, stays \, on \, your \, hand \, during \, work.$ The thin liner keeps your hands dry and warm in slightly cold environments.

**DISPLAY** Hook with hangtag LINING MATERIAL Fleece

SIZE XS - 3XL

LENGTH RANGE 235-255 mm

UNITS PER BUNDLE/CARTON 6 60 PAIRS

FEATURES Chrome free, reinforced index finger,  $reinforced\ fingertips, windproof, waterproof$ 





WATERPROOF SYNTHETIC LEATHER **GLOVE** 













EN 420:2003



EN 388:2016



EN 511:2006

#### TEGERA® 518

Synthetic leather glove, winter-lined, synthetic leather, polyester, fleece, Cat. II, chrome free, waterproof, for precision work

 $\textbf{DISPLAY} \ \mathsf{Hangtag} \ \mathsf{with} \ \mathsf{euro} \ \mathsf{slot}$ LINING MATERIAL Fleece

SIZE XS - 3XL

LENGTH RANGE 215-270 mm

UNITS PER BUNDLE/CARTON 6 60 PAIRS

FEATURES Chrome free, reinforced index finger, reinforced fingertips, waterproof













EN 420:2003 + A1:2009





EN 511:2006 111

**FOR PRECISION WORK** 

#### ■ TEGERA® 519

Assembly glove in stretchy synthetic leather, insulated and waterproof with an extended cuff. Flexible and provides excellent fingertip sensitivity.

**DISPLAY** Hook with hangtag LINING MATERIAL Fleece

SIZE XS - 3XL

LENGTH RANGE 250-310 mm

UNITS PER BUNDLE/CARTON 6 60 PAIRS

FEATURES Chrome free, reinforced index finger,

reinforced fingertips, waterproof











0111X



EN 388:2016 EN 511:2006 0111X

THERMAL PROTECTION | COOL AND WET/LIGHT MOIST ENVIRONMENTS

#### ■ TEGERA® 577

Cut resistant glove, fully lined, 0,6 mm synthetic leather, structured, polyester, cut resistance level C, HPPE, stainless steel fibre yarn, Cat. II, chrome free, for touchscreen, waterproof, fibreglass-free, for allround work.

**DISPLAY** Hook with hangtag

LINING MATERIAL HPPE, polyester, stainless steel fibre yarn

**GRIP PATTERN** Structured

SIZE XS - 3XL

LENGTH RANGE 225-260 mm

UNITS PER BUNDLE/CARTON 6 72 PAIRS

FEATURES For touchscreen, chrome free, reinforced index finger, reinforced fingertips, waterproof



















EN ISO 21420:2020



EN 388:2016+A1:2018







#### TEGERA® PRO 9127

This glove keeps you warm and provides a fantastic grip in cold conditions thanks to the high quality Microthan®+ syntethic leather and the Thinsulate 40g winter lining.

**DISPLAY** Hook with hangtag LINING MATERIAL Fleece, Thinsulate 40g GRIP PATTERN Diamond grip pattern SIZE S - 3XL

LENGTH RANGE 225-275 mm UNITS PER BUNDLE/CARTON 6 60 PAIRS FEATURES Chrome free, reinforced index finger, reinforced seams, reinforced fingertips, pre-curved fingers, specially designed thumb, windproof back, ergonomically shaped, specially designed details





**FANTASTIC GRIP IN COLD CONDITIONS** 





MICROTHAN®+

*Thinsulate* 



EN ISO 21420:2020



EN 388:2016+A1:2018 2112X





#### THERMAL PROTECTION | COLD AND WET/LIGHT MOIST ENVIRONMENTS

#### TEGERA® PRO 9128

Ergonomic, waterproof glove featuring Microthan+® touchscreen capabilities. Thinsulate™  $technology \ and \ inner \ fleece \ helps \ trap \ body \ heat. \ Durable \ Microthan ^** + synthetic \ leather.$ 

**DISPLAY** Hook with hangtag LINING MATERIAL Fleece, Thinsulate 40g GRIP PATTERN Diamond grip pattern **SIZE** XS - 3XI LENGTH RANGE 240-275 mm

**UNITS PER BUNDLE/CARTON** 6 60 PAIRS

FEATURES For touchscreen, chrome free, high visibility colour, reinforced index finger, reinforced seams, reinforced fingertips, precurved fingers, specially designed thumb, knuckle protection, windproof, waterproof, ergonomically shaped, reflector, specially designed details





**AQUA**THAN®

MICROTHAN®+















EN ISO 21420:2020



EN 388:2016+A1:2018





#### **TEGERA®** DYNAMIC STRENGTH **7798**

Warm-lined premium glove with high-visibility colour. Waterproof and breathable, with touchscreen functionality. Crafted top-quality full-grain goat skin.

DISPLAY Hangtag with euro slot **LINING MATERIAL** Fleece, Thinsulate <sup>™</sup> 40g SIZE S - 3XL

LENGTH RANGE 240-275 mm UNITS PER BUNDLE/CARTON 6 36 PAIRS FEATURES For touchscreen, high visibility colour,

reinforced index finger, reinforced fingertips, reinforced thumb, specially designed thumb, waterproof, reflector, specially designed details, elastic





**TOP QUALITY ALL THE** WAY













EN 420:2003 + A1:2009



EN 388:2016 2111X



EN ISO 11640:2012 Dry 150 cycles 4/5 Wet 50 cycles 3/4

Cold

#### THERMAL PROTECTION | COLD AND WET/LIGHT MOIST ENVIRONMENTS

#### ■ TEGERA® DYNAMIC STRENGTH 7795

Leather glove in full grain goatskin and spandex. Winter-lined with Thinsulate  $^{\circ}$  40g and waterproof. Comfortable and flexible with reinforced index finger, reinforced fingertips, reinforced thumb.

**DISPLAY** Hangtag with euro slot LINING MATERIAL Thinsulate 40g SIZE S - 3XL

 $\textbf{LENGTH RANGE}\ 260\text{-}310\ \mathsf{mm}$ 

UNITS PER BUNDLE/CARTON 6 36 PAIRS

FEATURES Reinforced index finger, reinforced fingertips, reinforced thumb, specially designed thumb, waterproof





**WARM, WINTER-LINED AND WATERPROOF** 







#### **Thinsulate**





EN ISO 21420:2020



EN 388:2016+A1:2018 2111X



EN 511:2006



#### TEGERA® DYNAMIC STRENGTH 7799

 $Winter \ lined \ premium \ cut \ protection \ E \ glove \ with \ high \ visibility \ colour \ and \ touch screen \ function.$ Made of full grain goat skin of top quality. For allround work.

LINING MATERIAL HPPE, polyester, stainless steel fibre yarn

SIZE XS - 3XL

LENGTH RANGE 235-260 mm

UNITS PER BUNDLE/CARTON 6 36 PAIRS

FEATURES For touchscreen, reinforced fingers



**PREMIUM CUT PROTECTION GLOVE** 











EN ISO 21420:2020



EN 388:2016+A1:2018


and thumb, waterproof



EN 511:2006











#### TEGERA® 295

Pofessional and most-popular waterproof winter glove for cold and wet outdoor work. The ergonomic design provides superior all-day comfort, reducing hand fatigue.

**DISPLAY** Hook with hangtag LINING MATERIAL Thinsulate 40g

SIZE XS - 4XL

UNITS PER BUNDLE/CARTON 6 60 PAIRS

FEATURES Reinforced fingers and thumb,

waterproof







Thinsulate



EN ISO 21420:2020



EN 388:2016+A1:2018



EN 511 cl 4.3 Waterpenetration (ISO 15383): Pass







#### ■ TEGERA® 297

This is the winter glove for you who prioritize strength and fit. The glove has full grain goatskin for the fit and softness and Thinsulate  $\widetilde{\ }$  100g lining to keep you warm.

**DISPLAY** Hook with hangtag **LINING MATERIAL** Thinsulate 100g curved fingers, waterproof, moisture resistant

SIZE M - XXL

LENGTH RANGE 265-275 mm

UNITS PER BUNDLE/CARTON 6 60 PAIRS

FEATURES Reinforced fingers and thumb, pre-





**A STRONG WINTER GLOVE WITH GREAT FIT** 







**AQUA**THAN®

Thinsulate



EN 420:2003 + A1:2009



EN 511:2006 EN 388:2016 2111X



#### TEGERA® 293

Leather glove, winter-lined, 0,7-0,8 mm full grain goatskin, polyester, Thinsulate 40g, Cat. II, high visibility colour, wind and waterproof back, waterproof, for allround work

**DISPLAY** Hook with hangtag LINING MATERIAL Thinsulate <sup>™</sup> 40g SIZE M - 3XL

LENGTH RANGE 250-285 mm **UNITS PER BUNDLE/CARTON** 6 60 PAIRS FEATURES High visibility colour, reinforced fingers and thumb, waterproof





**AQUA**THAN®

#### Thinsulate



EN 420:2003



EN 388:2016



EN 511:2006

#### ■ TEGERA® 8832R

Glove with cold protection in combination with high cut protection (Level D). Knuckle dipped with latex for cold and wet environments. 10 gg and CRF cut resistance technology.

DIPPING 3/4 dipped, double-dipped **DISPLAY** Hangtag with euro slot **DIPPING MATERIAL** Latex LINING MATERIAL 10 gg, 13 gg, acrylic, CRF® Technology, HPPE, stainless steel fibre yarn

**GRIP PATTERN** Sandy finish

LENGTH RANGE 250-285mm

UNITS PER BUNDLE/CARTON 6 72 PAIRS

FEATURES Withstands contact heat up to 250°C, water repellent palm and knuckle







WHEN THE **WORK IS SHARP, COLD AND WET** 














EN ISO 21420:2020



SIZE S - 3XL

EN 388:2016+A1:2018 2X42D









#### THERMAL PROTECTION | VERY COLD AND WET/LIGHT MOIST ENVIRONMENTS

#### TEGERA® 299

Leather glove, winter-lined, grain cowhide, neoprene, polyester, Thinsulate 150g, Cat. II, high visibility colour, wind and waterproof back, waterproof, for allround work

**DISPLAY** Hook with hangtag **LINING MATERIAL** Thinsulate 150g

SIZE S - 3XL LENGTH RANGE 255-310 mm

UNITS PER BUNDLE/CARTON 6 60 PAIRS

FEATURES Extra long, high visibility colour,

reinforced fingers and thumb, pre-curved fingers, wind and waterproof back, waterproof











**AQUA**THAN®

#### Thinsulate



EN 420:2003 + A1:2009



EN 388:2016 2122X



EN 511:2006 231





#### NEW TEGERA® PRO 9131

Ergonomic winter glove, water and wind-proof with Aquathan®, featuring touchscreen functionality. Up to 70% of the glove's weight is crafted from sustainable materials.

**DISPLAY** Hangtag with euro slot

LINING MATERIAL Fleece

GRIP PATTERN Diamond grip pattern

SIZE S - XXL Pairs

UNITS PER BUNDLE/CARTON 6 60 PAIRS

FEATURES For touchscreen, pre-curved fingers, specially designed thumb, windproof, waterproof, reflector, soft





**A FAVOURITE** WITH HIGH **VISIBILITY** 











**AQUA**THAN®

MICROTHAN®+





EN ISO 21420:2020



EN 388:2016+A1:2018



EN 511:2006





#### NEW TEGERA® PRO 9130

Ergonomic winter glove, water and wind-proof with Aquathan®, featuring touchscreen functionality. Up to 70% of the glove's weight is crafted from sustainable materials.

**DISPLAY** Hangtag with euro slot

LINING MATERIAL Fleece

 $\textbf{GRIP PATTERN} \ \mathsf{Diamond} \ \mathsf{grip} \ \mathsf{pattern}$ 

SIZE S - XXL Pairs

**UNITS PER BUNDLE/CARTON** 6 60 PAIRS

FEATURES For touchscreen, waterproof, ergonomically shaped, soft





**A FAVOURITE WITH FLEXIBLE CUFF** 













**AQUA**THAN®

MICROTHAN®+



EN ISO 21420:2020



EN 388:2016+A1:2018





#### ■ TEGERA® DYNAMIC STRENGTH 7797

Leather glove, winter-lined, full grain goatskin of top quality, neoprene, Thinsulate 120g, Cat. II, reinforced fingers and thumb, waterproof, for allround work

**DISPLAY** Hangtag with euro slot LINING MATERIAL Thinsulate 120g SIZE S - 3XL

 $\textbf{LENGTH RANGE}\ 260\text{-}280\ \mathsf{mm}$ UNITS PER BUNDLE/CARTON 3 36 PAIRS FEATURES Reinforced index finger, reinforced fingertips, reinforced thumb, pre-curved fingers, specially designed thumb, waterproof, moisture resistant, reflector











#### **Thinsulate**



EN 420:2003 + A1:2009



EN 388:2016





#### THERMAL PROTECTION | EXTREME COLD AND WET/LIGHT MOIST ENVIRONMENTS

#### ■ TEGERA® 191

Leather glove, winter-lined, full grain cowhide of top quality, Thinsulate™ 200g, Cat. II, reinforced thumb, waterproof, for allround work

**DISPLAY** Hook with hangtag **LINING MATERIAL** Thinsulate <sup>™</sup> 200g SIZE S - 3XL

UNITS PER BUNDLE/CARTON 3 30 PAIRS FEATURES Extra long, reinforced thumb,

 $\textbf{LENGTH RANGE}\,342\text{-}396\,\text{mm}$ 

windproof, waterproof












**AQUA**THAN®

#### **Thinsulate**











EN 511:2006

EN 511 cl. 5.2 Flexibility behavior (-20°C): Pass EN 511 cl. 5.4

Extreme cold flexibility (-50°C): Pass



#### TEGERA® 595

Leather glove, winter-lined, full grain cowhide of top quality, Thinsulate™ 200g, Cat. II, reinforced fingers and thumb, waterproof, for allround work.

**DISPLAY** Hook with hangtag LINING MATERIAL Thinsulate 200g SIZE M - 3XL LENGTH RANGE 342-396 mm

 $\textbf{FEATURES} \ \mathsf{Extra} \ \mathsf{long} \text{, reinforced fingers and}$ thumb, waterproof







**AQUA**THAN®

Thinsulate



+ A1:2009



EN 388:2016 3232X



EN 511 cl. 5.2 Flexibility behavior (-20°C): Pass

EN 511 cl. 5.4 Extreme cold flexibility (-50°C): Pass











EN 420:2003

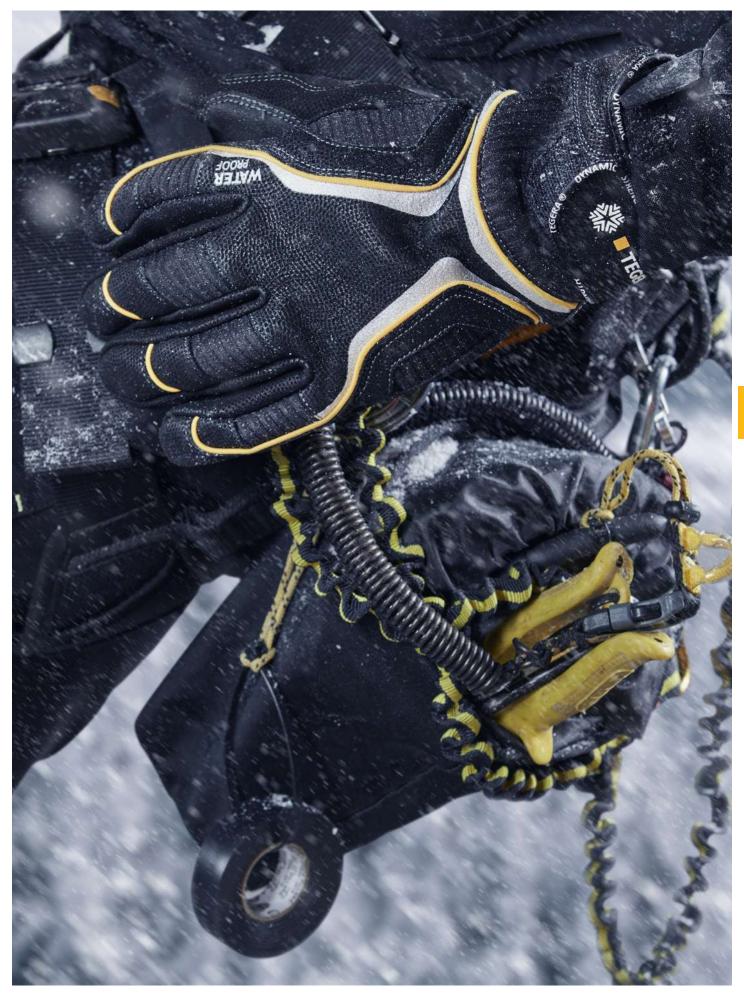

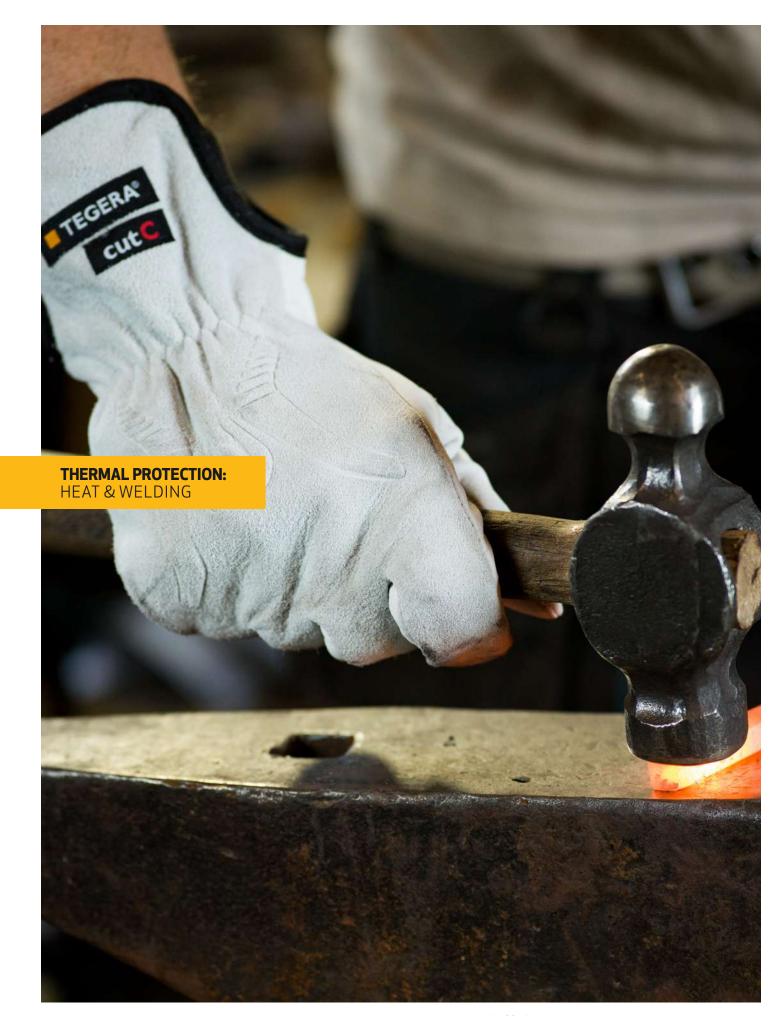

# **THERMAL PROTECTION: HEAT & WELDING**

Contact heat		HEAT RESISTANT GLOVES		WELDING GLOVES	
<100°C	NO CUT PROTECTION		Recommend for TIG-weld	126A Quality goat leather, soft, dexterius  19 Cowsplit leather	118A Quality goat leather
	CUT PROTECTION	666  Neoprene, 13 gg, only palm area, Cut C KEVLAR* FIBER	2010 Neoprene, Cut E, 13 gg, palm-dipped, Nomex. Kevlar.  Arc flash protection	132A Quality goat leather, Cut C KEVLAR* FIBER  134 Quality goat leather, Cut C KEVLAR* FIBER	7787 Premium quality goat leather, CUT F  S127 Premium quality goat leather, welding, CUT B
	NO CUT PROTECTION	17 Quality cow leather			
<250°C	CUT PROTECTION	987 Nitrile, 7 gg., Para-aramid, only palm area, Cut F	7780 Full grain cow hide, Cut C	585 High quality cow split leather, Cut C, heat reflective KEVLAR* FIBER	

# **HEAT-RESISTANT GLOVES**

TEGERA® has a wide range of heat-resistant gloves that all are made from a material that cannot burn and that provide excellent durability and perfect fit. They are tanned so as to cope with high temperatures without shrinking or hardening, available in lined and unlined models to suit different needs.

#### THERMAL PROTECTION | HEAT RESISTANT GLOVES

#### TEGERA® 666

Cut resistant glove, neoprene, palm-dipped, foam grip pattern, cut resistance level C, 13 gg, glass fibre thread, KEVLAR® fiber, Cat. II, withstands contact heat up to 100°C, water and oil repellent palm, for fine assembly work

**DIPPING** Palm-dipped **DISPLAY** Bag with euro slot **DIPPING MATERIAL** Neoprene

LINING MATERIAL 13 gg, glass fibre thread, KEVLAR® fiber

GRIP PATTERN Foam grip pattern

SIZE S - XXI

LENGTH RANGE 220-260 mm

**UNITS PER BUNDLE/CARTON 12 120 PAIRS** 

FEATURES Withstands contact heat up to 100°C, water and oil repellent palm, flame retardant, heat-resistant



**CUTC** 









CE Cat. II UK EN ISO 21420:2020



EN 388:2016+A1:2018



EN 407:2020 41310X





#### TEGERA® 17

Long-lasting protection against heat for heavy-duty jobs. All day comfort thanks to the flexible split cowhide. Cotton jersey liner inside the glove for better sweat management.

**DISPLAY** Thread LINING MATERIAL Cotton, jersey SIZE M - XXL LENGTH RANGE 240-280 mm

**UNITS PER BUNDLE/CARTON** 6 60 PAIRS

FEATURES Withstands contact heat up to 250°C,

reinforced seams, flame retardant, withstands welding sparks and grinding splash











EN 388:2016+A1:2018 4143X



EN 407:2004 42334X

#### THERMAL PROTECTION | HEAT RESISTANT GLOVES

#### ■ TEGERA® 987

Cut resistant glove, nitrile, palm-dipped, sandy finish, cut resistance level F, 7 gg, acrylic, paraaramid, stainless steel fibre yarn, Cat. II, withstands contact heat up to 250°C, extra long, water and oil repellent palm, for heavy work

**DIPPING** Palm-dipped **DISPLAY** Bulk pack **DIPPING MATERIAL** Nitrile

LINING MATERIAL 7 gg, acrylic, para-aramid, stainless steel fibre yarn **GRIP PATTERN** Sandy finish

SIZE S - XXL

LENGTH RANGE 250-290 mm

**UNITS PER BUNDLE/CARTON** 6 60 PAIRS

FEATURES Withstands contact heat up to 250°C, extra long, water and oil repellent palm





**CUTF** 









EN 388:2016











Top quality leather glove for heavy applications and high level of protection. The glove withstands contact heat up to 250°C, has cut resistance level C and is fully lined.

**DISPLAY** Thread

SIZE S - 4XL

LENGTH RANGE 315-340 mm

UNITS PER BUNDLE/CARTON 6 60 PAIRS

FEATURES Withstands contact heat up to 250°C



**PROTECTS AGAINST HEAT, COLD & CUTS** 



CUTE





EN ISO 21420:2020



EN 388:2016+A1:2018 3X33C



EN 407:2004 424344







#### THERMAL PROTECTION | HEAT RESISTANT GLOVES





NEW TEGERA® 2010

The Arc Flash glove features Nomex®, a high-performance fiber renowned for high burning protection. Withstands up to 11 cal/cm<sup>2</sup>, Arc category level 2.

**DIPPING** Palm-dipped

**DISPLAY** Hook with hangtag

**DIPPING MATERIAL** Neoprene

LINING MATERIAL 13 gg, glass fibre thread, KEVLAR® fiber, modacrylic, Nomex®, spandex

GRIP PATTERN Foam grip pattern

SIZE XS - XXI

LENGTH RANGE 220-260 mm


UNITS PER BUNDLE/CARTON 12 60 PAIRS

FEATURES Withstands contact heat up to 100°C, flame retardant, heat-resistant



**HIGH PROTECTION FOR ARC FLASH HAZARDS** 

#### Nomex.





EN ISO 21420:2020



EN 388:2016+A1:2018 3X41E



EN 407:2020 4131XX







ASTM F2675-23



# **WELDING GLOVES**

Welding gloves are longer than heat-resistant gloves. While our gloves protect you from spattering, welding sparks and skin burns, we have made sure that they are flexible, soft and comfortable and have high fingertip sensitivity and dexterity. This is important in welding, especially when you use your skills to handle small objects.

#### THERMAL PROTECTION | WELDING GLOVES

#### TEGERA® 126A

Industry benchmark for TIG welding leather glove . Superior comfort and flexibility thanks to the top quality, full-grain goatskin, 0.7mm-thin and unlined for extra tactility and precision.

**DISPLAY** Thread SIZE S - XXL LENGTH RANGE 310-350 mm UNITS PER BUNDLE/CARTON 12 60 PAIRS FEATURES Withstands contact heat up to 100°C, heat-resistant sewing thread, reinforced index finger, KEVLAR® thread in the seams which resists 427° C short-term heat exposure (max operating limit) and 204° C longer-term heat exposure (constant operating limit)









EN 420:2003 + A1:2009



EN 388:2016 2111X



EN 407:2004

EN 12477:2001 + A1:2005

Type B EN 1149-2:1997 R:2.55x10<sup>5</sup>Ω

#### TEGERA® 118A

Welding and heat-resistant glove, unlined, 0,7-0,8 mm full grain goatskin, split cowhide, Cat. III, reinforced seams, withstands welding sparks and grinding splash, for allround work


**DISPLAY** Thread SIZE S - 3XL LENGTH RANGE 310-360 mm UNITS PER BUNDLE/CARTON 12 60 PAIRS

FEATURES Withstands contact heat up to 100°C, reinforced index finger, reinforced seams, with stands welding sparks and grinding splash











EN 388:2016+A1:2018 3121X



EN 407:2020 412X4X

EN 12477:2001 + A1:2005

Type B

EN 1149-2:1997  $R > 1.0 \times 10^5 \Omega$ 

#### **TEGERA® 19**

 $Long-lasting\ performance\ and\ high\ anti-burn\ protection, for\ welding\ jobs.\ All\ day\ comfort\ thanks$ to the flexible split cowhide. Cotton jersey liner inside the glove for better sweat management.

**DISPLAY** No thread **LINING MATERIAL** Jersey SIZE M - XXL

LENGTH RANGE 320-365 mm

UNITS PER BUNDLE/CARTON 6 60 PAIRS FEATURES Withstands contact heat up to 100°C, reinforced seams, flame retardant, withstands welding sparks and grinding splash



**PROTECTS AGAINST HOT OBJECTS** 







EN ISO 21420:2020



EN 388:2016+A1:2018 2144X



EN 407:2020

EN 12477:2001 + A1:2005



#### NEW TEGERA® 5127

MIG welding glove made from quality goat grain with a cow split cuff. Reversed goat grain on palm, provides strength and grip. Cut protection level B. Flexible with a good fit.

SIZE S - XXL

LENGTH RANGE 310-370 mm

UNITS PER BUNDLE/CARTON 12 60 PAIRS

FEATURES Withstands contact heat up to 100°C, heat-resistant sewing thread, flame retardant,



CUTB

**MIG GLOVE WITH CUT PROTECTION B** 







EN 388:2016+A1:2018



EN 407:2020 41224X









Superior welding and cut protection (C) glove for heavy-duty jobs. Thin full grain goat suede provides excellent tactility. KEVLAR® liner inside the glove for extra heat and cut protection.

**DISPLAY** Thread

LINING MATERIAL KEVLAR® fiber, Nomex®

SIZE S - XXL

 $\pmb{\mathsf{LENGTH}\,\mathsf{RANGE}\,\mathsf{395}\,\mathsf{mm}}$ 

UNITS PER BUNDLE/CARTON 6 60 PAIRS

FEATURES Withstands contact heat up to 100°C,

extra long, reinforced index finger, reinforced seams, water and oil repellent, withstands welding sparks and grinding splash



**SUPERIOR FOR WELD-**ING AND CUT PROTEC-TION

Kevlar.





EN ISO 21420:2020



EN 388:2016+A1:2018



EN 407:2020 41334X

EN 12477:2001 + A1:2005

EN 1149-2:1997  $R > 1.0 \times 10^6 \Omega$ 



CUT C

**DISPLAY** Thread LINING MATERIAL KEVLAR® fiber SIZE S - 4XL LENGTH RANGE 310-370 mm

UNITS PER BUNDLE/CARTON 12 60 PAIRS

FEATURES Withstands contact heat up to 100°C, reinforced seams, water and oil repellent



**WELDING GLOVE WITH CUT RESISTANCE C** 

#### **Kevlar**















EN 12477:2001 + A1:2005

EN 1149-2:1997 R:0.130x10°Ω

CUT C

#### TEGERA® 585

A fully lined heat and cut resistant glove. With stands contact heat up to 250  $^{\circ}\text{C}.$  Cut resistance level 3. Water and oil repellent palm. Made of cowhide and aluminium.

**DISPLAY** Thread LINING MATERIAL KEVLAR® fiber SIZE M - 3XL LENGTH RANGE 375-415 mm

UNITS PER BUNDLE/CARTON 3 30 PAIRS

FEATURES Cut resistant according to 388:2003 level 3, withstands contact heat up to 250°C, water and oil repellent palm, heat-resistant



STRONG PROTECTION

**AGAINST HEAT** 









EN 420:2003 + A1:2009



EN 388:2016 3344X



EN 407:2004 423344

EN 12477:2001 + A1:2005

EN 1149-2:1997 R:41.8\*10<sup>6</sup>Ω







TEGERA® 7787

MIG welding high-quality glove with gun grip reinforcements, control patches and folded fingertips for high fingertip sensitivity. Heat resistant up to 100°C /212°F.

**DISPLAY** Hangtag with euro slot SIZE S - 3XL Pairs

UNITS PER BUNDLE/CARTON 6 60 PAIRS

FEATURES Withstands contact heat up to 100°C, heat-resistant sewing thread, reinforced seams



**CUTF** 

**MIG GLOVE** WITH HIGH CUT **PROTECTION** 











EN 388:2016+A1:2018 2X33F




EN 407:2020 EN 12477:2001 + A1:2005








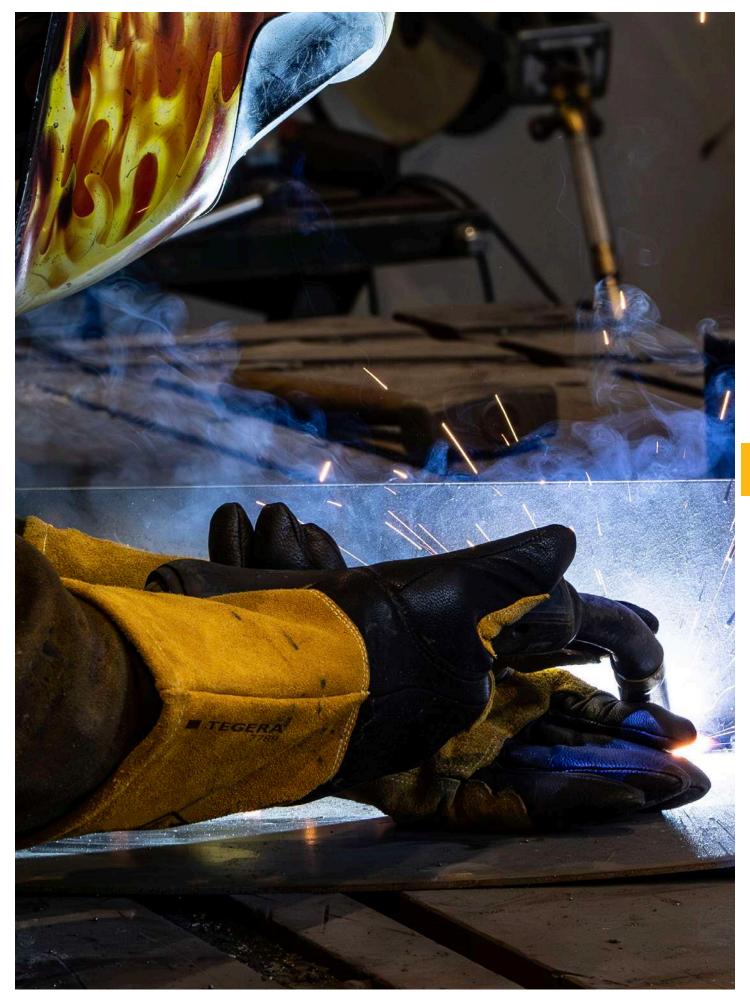

PROTECTIVE HAND AND FOOTWEAR PRODUCT CATALOG 2025 | **67** | GLOVES

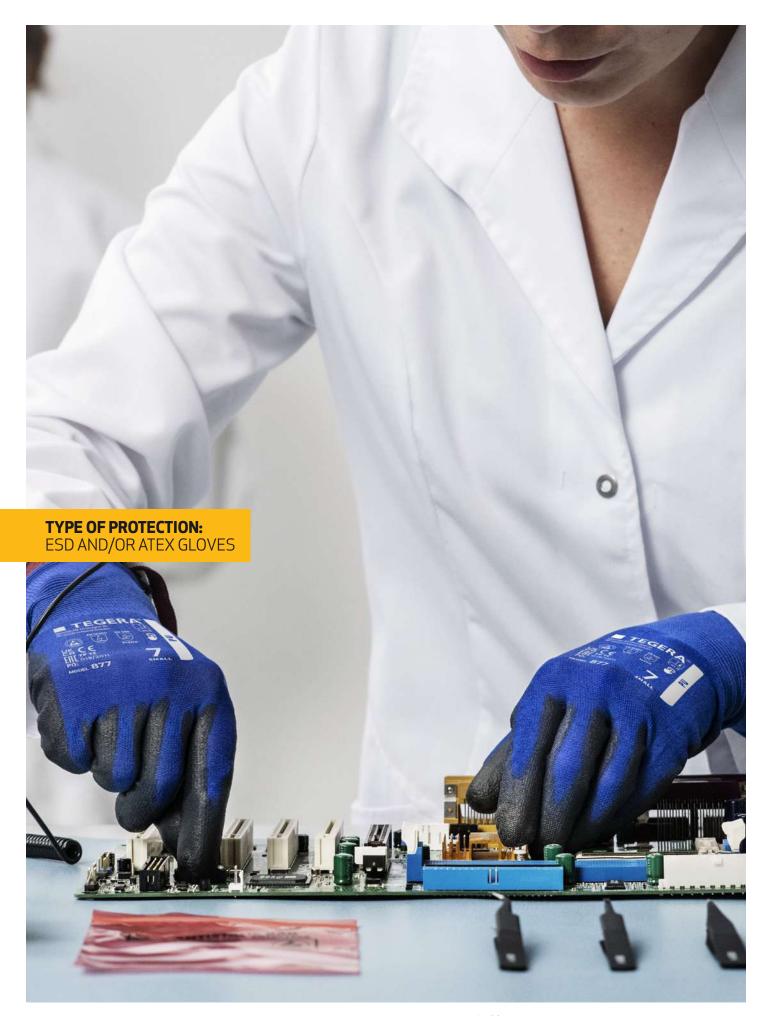

# **ESD AND/OR ATEX GLOVES**

	-	DRY ENVIRONMENTS		WET/OILY ENVIRONMENTS
KNITTED (AND DIPPED) Knitted gloves enable avery precise fit.	CUT PROTECTION			804 Nitrile, CUT C, 18 gg, 3/4 dipped, contact heat < 100°C CCRF° (A) (F) (F)
	NO CUT PROTECTION	878 PU, 18 gg, palm-dipped	877 PU, 18 gg palm-dipped	
		811 PU, 13 gg, palm-dipped	801 PU, 13 gg, Fingertip dipped	

#### TEGERA® 804

A nitrile-dipped ATEX glove for use in potentially explosive environments. Cut resistant level C using TEGERA® CRF-Technology, ESD-approved with touchscreen functionality.

**DIPPING** 3/4 dipped, double-dipped

**DISPLAY** Bulk pack

**DIPPING MATERIAL** Nitrile

LINING MATERIAL 18 gg, carbon, CRF® Technology, glass fibre thread, HPPE, polyester,

**GRIP PATTERN** Sandy finish

SIZE XS - XXL

LENGTH RANGE 220-270 mm

**UNITS PER BUNDLE/CARTON** 6 120 PAIRS

FEATURES Withstands contact heat up to 100°C, for touchscreen, latex-free, oil and grease resistant, ESD, antistatic/ATEX, conforms with IEC 61340-5-1 (ESD), thin



**CUTC** 

ATEX GLOVE FOR USE IN EXPLOSIVE AREAS









**A** 21420:2020





3X41C

EN 407:2020 No Flame Protection EN 388:2016+A1:2018 X1XXXX













#### SPECIAL PROTECTION | ESD AND/OR ATEX WORK: DRY ENVIRONMENTS

#### ■ TEGERA® 878

Our thinnest ESD glove, palm-dipped with PU for maximum usability and comfort. For ESDprotected work areas where maximum dexterity is needed.

**DIPPING** Palm-dipped **DISPLAY** Bulk pack **DIPPING MATERIAL** PU LINING MATERIAL 18 gg, nylon **GRIP PATTERN** Smooth finish SIZE XXS - 3XL

LENGTH RANGE 205-270 mm **UNITS PER BUNDLE/CARTON** 6 120 PAIRS FEATURES ESD, conforms with IEC 61340-5-1 (ESD), ultra thin



**OUR THINNEST ESD GLOVE** 







EN ISO 21420:2020



EN 388:2016+A1:2018 1020X



IEC 61340-5-1:2016  $R < 1.0 \times 10^9 \Omega$ 

#### TEGERA® 877

A very thin ESD glove with touchscreen functionality and PU palm-dipping for high fingertip sensivity. For ESD-protected work areas where maximum dexterity is needed.

**DIPPING** Palm-dipped **DISPLAY** Bulk pack **DIPPING MATERIAL** PU LINING MATERIAL 18 gg, carbon, nylon **GRIP PATTERN** Smooth finish SIZE XXS - 3XL

LENGTH RANGE 220-270 mm **UNITS PER BUNDLE/CARTON** 6 120 PAIRS FEATURES For touchscreen, ESD, antistatic/ ATEX, conforms with IEC 61340-5-1 (ESD), ultra thin



A SUPER THIN AND **FLEXIBLE ESD GLOVE** 













IEC 61340-5-1:2016  $R < 1.0 \times 10^9 \Omega$ 





#### SPECIAL PROTECTION | ESD AND/OR ATEX WORK: DRY ENVIRONMENTS

#### **TEGERA® 811**

Synthetic glove, PU, palm-dipped, smooth finish, 15 gg, carbon, nylon, Cat. II, for precision work


**DIPPING** Palm-dipped **DISPLAY** Bulk pack **DIPPING MATERIAL** PU LINING MATERIAL 15 gg, carbon, nylon **GRIP PATTERN** Smooth finish SIZE XS - XL

LENGTH RANGE 220-250 mm UNITS PER BUNDLE/CARTON 12 120 PAIRS FEATURES ESD, antistatic/ATEX, conforms with IEC 61340-5-1 (ESD), thin





EN ISO 21420:2020





IEC 61340-5-1:2016  $R < 1.0 \times 10^9 \, \Omega$ 



EN 16350:2014  $R < 1.0 \times 10^8 \, \Omega$ 



#### TEGERA® 801


Our standard glove for ESD protection. Soft, smooth and highly breathable. 13 gg fibre to ensure all day comfort. PU fingertip-dipped for maximum grip.

**DIPPING** Fingertip dipped **DISPLAY** Bulk pack **DIPPING MATERIAL** PU LINING MATERIAL 13 gg, carbon, polyester **GRIP PATTERN** Smooth finish

SIZE RANGE XXS - 3XL LENGTH RANGE 195-250 mm UNITS PER BUNDLE/CARTON 12/120 PAIRS FEATURES ESD, antistatic/ATEX, conforms with IEC 61340-5-1 (ESD)



**ESD STANDARD GLOVE WITH GOOD FINGER GRIP** 





EN ISO 21420:2020



EN 388:2016+A1:2018 0131X



IEC 61340-5-1:2016  $R < 1.0 \times 10^9 \Omega$ 



EN 16350:2014  $R < 1.0 \times 10^8 \Omega$ 







### **OTHER PROTECTION**

#### **SYNTHETIC** LEATHER

leather.

### Quality synthetic

#### **VIBRATION PROTECTION**



**9180** Microthan, Vibrothan, best grip and fit

#### **LEATHER**

Leather is strong, supple and adapts to changes in weather and temperatures.

## IMPACT PROTECTION



**7770** High quality goat leather, Poron® XRD®



**7773**Goat leather,
Poron® XRD®,
Cut D, Aquathan ∆CRF°



**7775**Goat leather,
Poron® XRD®, Cut E



**7776**High quality goat leather,
Poron® XRD®, Cut D, Aquathan **∆CRF**°

# **TEGERA® VIBROTHAN®**

Dampens vibrations and reduces long-term injury

Vibrothan® a specially designed foam material that dampens vibrations and reduces long-term injury risks as a result. It protects the hands in areas where vibrations are frequently experienced. Developed and engineered to be used when working with vibrating machinery and tools.



Vibrothan® foam technology for optimal anti-vibration protection.



#### SPECIAL PROTECTION | VIBRATION PROTECTION

#### **TEGERA**° PRO **9180**

Vibrothan® foam technology for optimal anti-vibration protection. Excellent durability and grip performance thanks to Microthan® synthetic leather.

**DISPLAY** Hook with hangtag

LENGTH RANGE 210-242 mm

UNITS PER BUNDLE/CARTON 6 60 PAIRS

 $\textbf{FEATURES} \ \textbf{Vibration-reducing according to EN}$ ISO 10819, chrome free, reinforced index finger, reinforced seams, reinforced fingertips, padded palm, pre-curved fingers, specially designed thumb, ergonomically shaped, specially designed



**MICRO**THAN®

**VIBRO**THAN®



FN 420:2003 + A1:2009





# TEGERA® DYNAMIC STRENGTH, **IMPACT SERIES**

Heavy duty impact protection with a light and flexible feel



#### SPECIAL PROTECTION | IMPACT PROTECTION

#### TEGERA® DYNAMIC STRENGTH 7770

Impact-reducing glove, unlined, 0,7-0,9 mm full grain goatskin, spandex, Cat. II, knuckle protection, reinforced index finger, for allround work

**DISPLAY** Thread SIZE M - 3XL

LENGTH RANGE 227-240 mm

UNITS PER BUNDLE/CARTON 3 36 PAIRS

FEATURES Impact-reducing, reinforced index finger, reinforced palm, pre-curved fingers













#### **CUTE**

#### ■ TEGERA® DYNAMIC STRENGTH 7773

Impact-reducing glove, fully lined, 0,7-0,9 mm full grain goatskin of top quality, spandex, cut resistance level E, KEVLAR® fiber, Cat. II, knuckle protection, reinforced index finger, for allround work

**DISPLAY** Thread SIZE M - 3XL

LENGTH RANGE 235-285 mm

UNITS PER BUNDLE/CARTON 3 36 PAIRS

FEATURES Impact-reducing, reinforced index finger, reinforced palm, pre-curved fingers













C **C** Cat. II **UK** EN 420:2003



EN 388:2016 2X42EP





Impact-reducing glove, fully lined, full grain goatskin of top quality, spandex, cut resistance level E, KEVLAR® fiber, Cat. II, knuckle protection, reinforced index finger, high visibility colour, waterproof, for allround work

**DISPLAY** Thread

LINING MATERIAL KEVLAR® fiber

SIZE S - 3XL

LENGTH RANGE 240-285 mm

UNITS PER BUNDLE/CARTON 3 36 PAIRS

FEATURES Impact-reducing, high visibility colour,

reinforced index finger, pre-curved fingers, waterproof





















EN 420:2003



2X42EP

EN 388:2016 EN 511 cl 4.3 Waterpenetration (ISO 15383): Pass





#### **TEGERA®** DYNAMIC STRENGTH **7776**

Impact-reducing glove, fully lined, full grain goatskin of top quality, structured, spandex, cut resistance level D, CRF® Technology, fleece, Cat. II, knuckle protection, reinforced index finger, high visibility colour, waterproof, for allround work

**DISPLAY** Thread

LINING MATERIAL CRF® Technology, fleece, **HPPE** 

**GRIP PATTERN** Structured

SIZE S - 3XL LENGTH RANGE 235-285 mm UNITS PER BUNDLE/CARTON 3 36 PAIRS

FEATURES Impact-reducing, high visibility colour, reinforced index finger, pre-curved fingers,



CUTD





















EN 420:2003 + A1:2009







#### TEGERA® 84301

Thin disposable high-quality glove, only 0,06 mm/2,3 mils nitrile and yet very durable. Approved for handling food and latex free. For precision work.

**DISPLAY** Box

**DIPPING MATERIAL** Nitrile GRIP PATTERN Extra fingertip grip

 $\textbf{SIZE} \, \textbf{S} - \textbf{XXL}$ 

 $\textbf{LENGTH RANGE}\ 240\ \mathsf{mm}$ 

**QUANTITY PER PACK** 200 Pieces

#### **UNITS PER BUNDLE/CARTON 10 PACKS** FEATURES Splash protection against chemicals, approved for handling foodstuffs, for touchscreen, waterproof, thin



**OUR THINNEST DISPOSABLE GLOVE** 









EN ISO 21420:2020





EN ISO 374-5:2016



FDA compliant material

#### ■ TEGERA® 842

A disposable and very flexible, non-powder, nitrile glove with excellent fingertip sensitivity. Accelerator-free and latex-free to prevent skin allergies.  $0.07 \, \text{mm}/2.75 \, \text{mils}$ .

**DISPLAY** Box

**DIPPING MATERIAL** Nitrile **GRIP PATTERN** Structured

SIZE S - XL

 $\pmb{\mathsf{LENGTH}\,\mathsf{RANGE}\,240\,\mathsf{mm}}$ **QUANTITY PER PACK 100 Pieces**  **UNITS PER BUNDLE/CARTON 10 PACKS** 

FEATURES Approved for handling foodstuffs, inside chlorinated, for touchscreen, latex-free, waterproof, elastic, accelerator-free, thin



FOR PROTECTION OF SENSITIVE HANDS









EN ISO 21420:2020





EN ISO 374-1:2016/A1:2018/ Type B



#### TEGERA® 846

A disposable nitrile glove with extra-long cuff for extra protection. It has a good fit and a light texture for a good grip. 0,19 mm/7,4 mil and approved for handling food stuffs.

**DISPLAY** Bag **DIPPING MATERIAL** Nitrile SIZE XS - 3XL LENGTH RANGE 290 mm

**QUANTITY PER PACK** 50 Pieces UNITS PER BUNDLE/CARTON 10 PACKS

FEATURES Approved for handling foodstuffs, for touchscreen, extra long, latex-free, oil and grease resistant, waterproof



**EXTRA-LONG CUFF FOR EXTRA PROTECTION** 



















FDA compliant material

#### TEGERA® 849

Dressy and durable 0,19 mm/7,4 mil nitrile disposable glove for versatile work. Long cuff for extended protection. Suitable for food applications.

**DISPLAY** Box

**DIPPING MATERIAL** Nitrile

SIZE S - 3XL

 $\pmb{\mathsf{LENGTH}\,\mathsf{RANGE}\,\mathsf{290}\,\mathsf{mm}}$ 

**QUANTITY PER PACK** 50 Pieces

UNITS PER BUNDLE/CARTON 10 PACKS

 $\textbf{FEATURES} \ \mathsf{Splash} \ \mathsf{protection} \ \mathsf{against} \ \mathsf{chemicals},$ high puncture resistance compared to similar gloves, approved for handling foodstuffs, for touchscreen, extra long, phthalate-free, latexfree, waterproof



**DISPOSABLE GLOVE FOR MANY PURPOSES** 












EN ISO 21420:2020







FDA compliant material

#### BARRIER PROTECTION | CHEMICAL SPLASH PROTECTION GLOVES

### NEW Jalas CLEAN 5100

Disposable glove intended for cleanrooms of ISO class 5 (100). Well-fitting with extra length, textured and fingertips and treated surface to that provide an enhanced grip.

**DISPLAY** Bag **DIPPING MATERIAL** Nitrile SIZE RANGE XS - XXL

LENGTH RANGE 300 mm **QUANTITY PER PACK 100 Pieces** 

#### **UNITS PER BUNDLE/CARTON** 10

FEATURES Splash protection against chemicals, approved for handling foodstuffs, double chlorinated, for touchscreen, latex-free, siliconefree, waterproof



**DISPOSABLE GLOVE FOR CLEANROOMS** 













EN ISO 21420:2020



EN ISO 374-5:2016



EN ISO 374-1:2016/A1:2018/ Type B JKPT



FDA compliant material

ISO 23464:2020

#### BARRIER PROTECTION | CHEMICAL PROTECTION GLOVES

#### **TEGERA®** 71000

Double dipped chemical protection PVC glove for allround work with non-slip granulated nitrile finish. 0,2 mm/7,8 mil chemical protection layer. Phthalate-free and accelerator-free.

**DISPLAY** Bulk pack

DIPPING MATERIAL Nitrile, PVC (Vinyl) LINING MATERIAL Nylon, seamless, tricot

**GRIP PATTERN** Granulated

SIZE S - XXL

**LENGTH RANGE 320 mm** 

UNITS PER BUNDLE/CARTON 6 72 PAIRS

FEATURES Protection against chemicals, approved for handling foodstuffs, phthalate-free, latex-free, pre-curved fingers, oil and grease resistant, waterproof, soft



**DOUBLE DIPPED FOR HIGH SAFETY** 











EN ISO 21420:2020



EN 388:2016+A1:2018








# **TEGERA®** 7361 & 7363

TEGERA® 7361 and 7363 nitrile gloves offers excellent flexibility and dipped palm for better grip. TEGERA® 7363 is also reinforced with a level C cut resistant liner. Nitrile gloves offer high abrasion resistance. Excellent barrier against moisture, oil and grease. Provides excellent grip in dry, wet and oily environments.

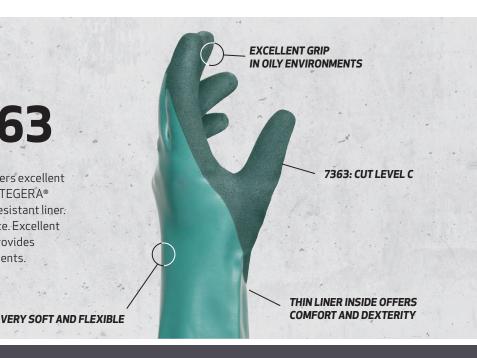

#### BARRIER PROTECTION | CHEMICAL PROTECTION GLOVES

#### TEGERA® 7361


0,3\* mm/11,8 mil chemical and heat protection glove with long safety cuffs and sandy finish for a perfect grip. Suitable for areas where there is a risk of thermal heat injuries.

**DIPPING** Fully dipped **DISPLAY** Bag with euro slot **DIPPING MATERIAL** Nitrile LINING MATERIAL 18 gg, nylon **GRIP PATTERN** Sandy finish SIZE S - XXI

**LENGTH RANGE** 340 mm UNITS PER BUNDLE/CARTON 12 60 PAIRS **FEATURES** Withstands contact heat up to 100°C, phthalate-free, latex-free, oil and grease resistant, waterproof



**2 PROTECTIONS** IN ONE GLOVE









21420:2020



EN 388:2016+A1:2018





EN ISO 374-1:2016/A1:2018/ Type A







**CUTC** 

#### BARRIER PROTECTION | CHEMICAL PROTECTION GLOVES

#### TEGERA® 7363

0,3\* mm/11,8 mil nitrile glove with chemical, cut and heat protection with dipping for non-slip finish. Suitable for work where chemical protection is needed and where there is a risk of cuts and heat damage.

**DIPPING** Fully dipped **DIPPING MATERIAL** Nitrile

LINING MATERIAL 18 gg, CRF® Technology, glass fibre thread, HPPE, nylon, polyester, spandex **GRIP PATTERN** Sandy finish

SIZE S - XXL

 $\textbf{LENGTH RANGE}\,340\,\text{mm}$ 

UNITS PER BUNDLE/CARTON 12 60 PAIRS

FEATURES Withstands contact heat up to 100°C, phthalate-free, latex-free, oil and grease resistant, waterproof



3 STRONG **PROTECTIONS** IN ONE GLOVE


































### Page No.

# **FOOT PROTECTION**

Footwear collections	84
Safety footwear: General purpose	108
Safety footwear: Cold insulated	130
Safety footwear: Heat & Welding	134
Safety footwear: Chainsaw Protection	135
Occupational footwear	136
Insoles, socks, accessories	138
Product index	145



Very soft and very stable may sound like a contradiction. However, the innovative JALAS® TIO technology enables us to produce very soft – and stable – shoes that withstand long working days without causing fatigue and pain. TIO stands for Three In One. A unique new outsole made in three layers. The soles have a JALAS® ComSoft Air™ layer with micro air bubbles that give the shoes long-lasting softness, lightness and good slip resistance. It's time you try the feeling of walking on air!



in textile material





#### **TIO PLATFORM**

Our TIO platform technology provides unique benefits with its threelayer outsole: STABILITY from the top PU-layer. SOFTNESS from the middle JALAS® ComSoft Air™ layer. SLIP RESISTANCE from the ground RPU-layer. RPU is a revolutionary patented outsole technology with major grip and comfort advantages compared to conventional soles.

- Fitting: Regular
- Hard-wearing
- Oil resistant
- ESD & Antistatic







#### **TRI-PANEL BOA® FIT SYSTEM**

For gentle and soft tigthening. TURN AND TIGHTEN A gentle and soft tightening eliminates pressure points and allows the asymmetric closure to adapt to your individual foot shape.

**GENTLY SECURES** 

Locks the foot comfortably in place and gives stability

COMFORT ALL DAY

Comfort and performance that lasts all day, enabling relaxed feet.







Push to engage



Turn to tighten



Pull up for quick release







**JALAS® TIO 2028** 

S3 SRC 🕡 🗸 🙆 BOA



JALAS® TIO 2068

S3 SRC 🔞 🗸 🙆 BOA°



# A CLOSER LOOK AT JALAS® TIO

#### STABILITY TO PROTECT YOUR BACK AND KNEES

- Higher sides give extra stability.
- Prevents twisting of the foot.

#### SOFTNESS FOR ULTIMATE COMFORT

- JALAS® ComSoft Air™ layer made with RU technology.
- Micro air bubbles provide long-lasting super softness.
- Shock absorbing to save back, knees
- The shape of the sole makes the step soft and creates forward energy.

#### SLIP RESISTANCE TO WALK SAFELY

- The micro air bubbles create "suction cups" for slip resistance and excellent grip on slippery, wet and oily surfaces.
- Very durable and exerts exceptional grip even when slightly worn.
- Higher density layer provides greater stability.





As winters become milder, waterproof qualities are becoming more important to stay dry and warm. Four new waterproof JALAS® models have been developed for winter, as well as year-round use. The industry standard GORE-TEX® membrane makes the shoes waterproof yet still breathable, to ensure your feet stay dry from both the inside and the outside.

All shoes have the same ergonomics and comfort for which JALAS® footwear is renowned. A highgrip outsole, in combination with a midsole and multilayered insole with the shock absorbing Poron® XRD® material, ensures comfort all day and ergonomics that help prevent long-term injuries to foot and back. A shank piece makes the shoes stable in order to fully support the feet. All models are equipped with our BOA® Fit System for optimal, easy adjustment and perfect fit.

### Building and construction environments

#### **JALAS® EXALTER GTX MODELS**

Three of the new models are based on our Exalter collection, a well-known customer favourite. Vibram® nitrile rubber outsole ensures excellent performance in a wide range of activities. Microfiber upper and enhanced toe protection provide additional support and protection from abrasion to extend the life of the shoe. Proven safety features include lightweight aluminium toe cap and soft textile nail protection insert.

#### **JALAS® 1398 HEAVY DUTY GTX MODEL**

The ultimate winter safety boot. Equipped with a warm fur lining and designed to withstand very cold, wet and demanding work environments – you won't find better foot protection. The JALAS® 1398 Heavy Duty GTX features the Vibram® Arctic Grip Pro outsole for excellent grip on wet, icy, oily and other slippery surfaces. Two BOA® Fit Systems ensure a perfect fit of both shoe and shaft in different work situations. Proven safety features include lightweight and metal-free composite toe cap, and soft textile nail protection insert.





#### PERFORMANCE **PLATFORM**

Our Performance platform features a nitrile rubber outsole developed in collaboration with Vibram®. The specially designed, pyramid-shaped pattern creates superior grip and slip resistance. Reinforced seat section for maximum heel support and better shock absorption. Specially designed flexible construction at the front of the sole. Stabilizator arch support system provides secure grip on ladders and adds stability.

- Fitting: Regular
- Withstands heat up to 300°C
  - Oil resistant
- Slip resistance: SRC














#### VIBRAM® ARCTIC GRIP **PLATFORM**

Prevents falls even on extremely slippery, oily, or icy surfaces. Unique gripping traction on icy surfaces with non-metal gripper lugs. Made of heat- and oil-resistant HNBR rubber, which remains soft even in very cold climates, down to -40°C. Draining channels remove oil, water and dirt. Stabilising arch support system provides secure grip on ladders and adds stability.

- Withstands heat up to 300°C
- · Fitting: Regular
- Slip resistance: SRC
- Antistatic
- Oil resistant





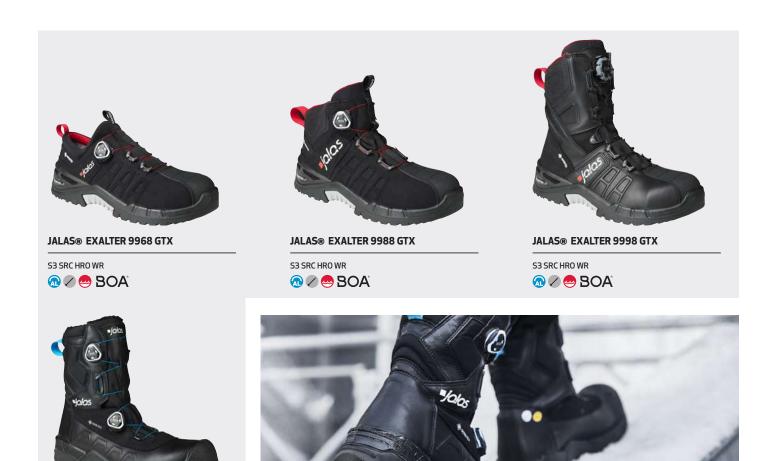

### Forestry and other chainsaw work environments

#### **Chainsaw protection boots**

**JALAS® HEAVY DUTY 1398 GTX** 

S3 SRC CI HRO WR

A robust and protective boot for all chainsaw work. Blending sporty and trekking style, the boot is sealed with GORE-TEX® membrane for 100% waterproofness and has a Vibram® nitrile outsole for safe grip even in wet and slippery conditions. Equipped with a steel toe cap to protect from falling objects and a soft textile nail penetration-resistant insert to protect from sharp objects on the ground. The upper material of the boot is a combination of Nubuck, Soft Nappa leather and Technical textile to provide high durability, softness and comfort.







JALAS® Zenit is our premium safety footwear collection, awarded with the prestigious Red Dot Design Award for its high quality protection and usability. Superior comfort comes from dual absorption zones in the FX2 insole, high density, foam-padded lining and exceptional stability. The BOA® Fit System adds custom comfort with smooth, even closure and no pressure points. The soft and lightweight RPU outsole perfects the experience.



#### ZENIT PLATFORM

The Zenit outsole is made of RPU, a revolutionary patented outsole technology with major grip and comfort advantages compared to conventional soles. Extremely durable, yet soft and comfortable. Stabilizator arch support system provides secure grip on ladders and adds stability. Suitable for users in the manufacturing sector and for artisans. Excellent for both indoor and outdoor work.

- Fitting: Regular
- Hard-wearing
- Oil resistant
- Stabilizator arch support
- ESD & Antistatic
- Slip resistance: SRC













**PROTECTION INSERT** (S3 models)

material in steel

PTC NAIL

### **HIGH BREATHABILITY AND DURABILITY**

with microfiber upper



1718: Nail protection CONFIDENT STABILITY AND **SECURE GRIP ON LADDERS** with Stabilizator arch support system

**EXTRA HIGH SLIP RESISTANCE** Zenit platform with outsole of RPU technology

**BOA® FIT SYSTEM** 





Pull up for quick release







Designed for use in light-duty environments, all six Zenit Evo models combine a lightweight sporty design and sock-like ergonomic fit, seamless construction and enhanced breathability, as well as JALAS® signature foot protection.

Inspired by the stretch-knit fabrics in modern athletic shoes, the sleek and virtually seamless upper shapes to fit the foot. Thanks to innovative, high-tech materials, the Zenit EVO is 10-15% lighter than its predecessor. The latest BOA® Fit System was added for a perfect fit.

When it comes to comfort, a seven-layer cushioning system provides an unparalleled level of foot support and protection. Each layer has a specific function – from JALAS® advanced FX3 Supreme insole, with arch and heel support, to the stable yet flexible midsole. While the plastic stabilizing shank prevents twisting, pads of Poron® XRD® foam protect the ball and heel of the foot from extreme impact.

#### **ADDED BREATHABILITY**

provided through seamless knitted upper and lining

#### **SOCK-LIKE ERGONOMIC COMFORT**

Based on high-tech materials and JALAS® know-how in ergonomic foot protection



for light weight and comfort



#### **CUSTOM PLATFORM**

Our Custom platform is an RPU sole: a revolutionary patented outsole technology with major grip and comfort advantages compared to conventional soles. Suitable for users in the manufacturing sector and for artisans. Excellent for both indoor and outdoor work.

- Hardwearing, yet soft and light weight
- Special gripping pattern with large contact area
- Reduces shock forces to knees, hip and lower back
- Outstanding all-day cushioning
- Fitting: Regular
- Slip resistance: SRC
- ESD & Antistatic
- Oil resistant









#### **GET A GRIP**

The special grip RPU sole creates suction cups and is spread out over a large contact area to keep you on your feet even on wet or oily surfaces.





Pull up for quick release

from molecular structured RPU

outsole material





SI SRC 🐽



JALAS® ZENIT EVO 7118

SIPSRC 🕡 🕢 BOA



JALAS® ZENIT EVO 7128

SIPSRC 🕡 🕢 BOA





**JALAS® ZENIT EVO 7158** 

SIPSRC 🕡 🖊 BOA

**S3** 



JALAS® ZENIT EVO 7138

S3 SRC 🕡 🗸 🚳 SOA



JALAS® ZENIT EVO 7168







JALAS® ZENIT EVO 7178

S3 SRC 🕡 🖉 🚳 SOA



Exalter shoes have a sporty look and feel without compromising on the protection you need for demanding work days. The aluminium toe cap protects the toes from falling objects and the Vibram® nitrile rubber outsole offers superior slip resistance. The shoes also have ESD and antistatic functionality.

Five of the models in the JALAS® Exalter collection have a sock-like construction for comfort and breathability. BOA® Fit System on the side, for minimum pressure on the foot and easy closure. The breathable polyamide lining absorbs moisture and keeps feet dry and cool. The four-layer insoles feature Poron® XRD® foam for comfort and shock absorption on even the longest work days.

The three new JALAS® Exalter GTX models are fully breathable and 100 % waterproof.





#### **PERFORMANCE PLATFORM**

Our Performance platform features nitrile rubber outsole developed in collaboration with Vibram®. The specially designed, pyramid-shaped pattern creates superior grip and slip resistance. Reinfor-

ced seat section for maximum heel support and better shock absorption. Specially designed flexible construction at the front of the sole. Stabilizator arch support system provides secure grip on ladders and adds stability.

- Fitting: Regular
- Withstands heat up to 300°C
- Oil resistant
- ESD & Antistatic
- Slip resistance: SRC













#### **VIBRAM ECOSTEP PRO**

The Vibram® Ecostep Pro outsole is made with up to 30% recycled nitrile rubber. It offers enhanced grip

and durability, as well as resistance to oil, heat, and tearing. Varying surface patterns are designed to provide grip at the front, back, and sides, while a pyramid-shaped pattern helps dirt fall off easily.

- Fitting: Regular
- Oil resistant
- ESD & Antistatic
- Slip resistance: SR















Push to engage




Turn to tighten



Pull up for quick release



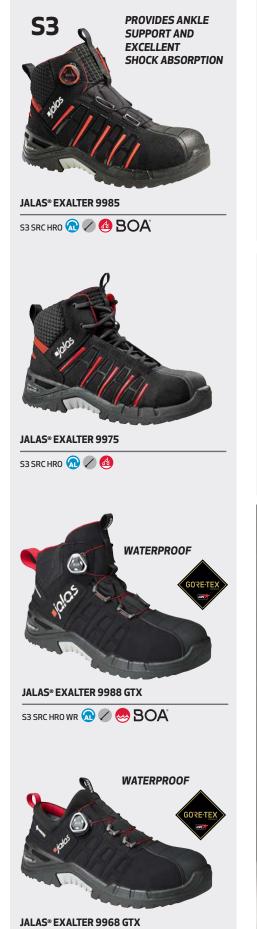












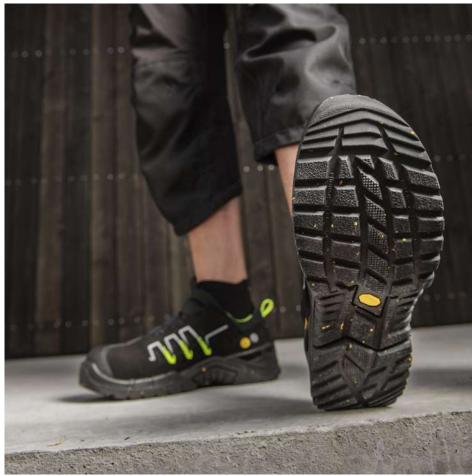




nitrile outsole

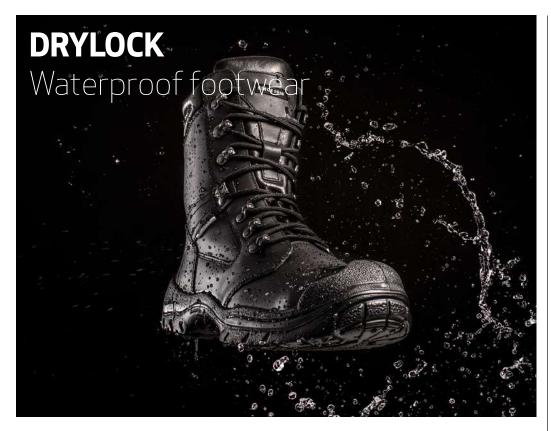

The Drylock collection has a waterproof membrane which is also breathable and leads away sweat and moisture. The nitrile rubber outsoles of the Drylock collection have very good slip resistance and are ideal for those who work on slippery and wet surfaces.

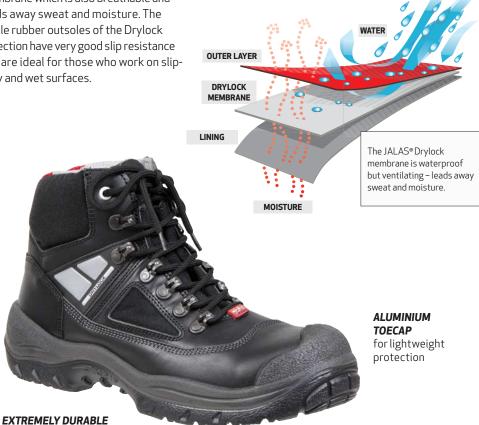

**NAIL PROTECTION MATERIAL: STEEL** 



#### **GRIP PLATFORM**

Our Grip platform is made of nitrile rubber, an extremely durable material. Suitable for industrial workers and craftsmen, both indoors and outdoors.

- Fitting: Regular
- Withstands heat up to 300°C
- Oil resistant
- ESD & Antistatic
- Slip resistance: SRB











# Waterproof S3




JALAS® DRYLOCK 3318






JALAS® DRYLOCK 3325

S3 HRO WR SRB 🕡 🕢 😂 🛞 👔















JALAS® HEAVY DUTY safety shoes have been developed for the most demanding work days, in tough environments and severe conditions. Eight ultra-durable models combine extraordinary safety features and protection with flexible and ergonomic comfort. Soft and shock-absorbing mid- and insoles help prevent feet and back pain.

#### Metal-free meets Vibram® Arctic Grip

Areas of use: Ideal for building and construction work, heavy manufacturing, transportation and environments requiring metal-free equipment.

Metal-free protective features needed for heavy-duty work in any environment:

- Composite toecap shields foot from impact from heavy objects
- PTC sole insert helps protect feet from sharp objects on the ground.

#### Advanced winter models

Four rugged winter models with soft thermo-lining and Vibram® Arctic Grip outsole to withstand extreme cold and icy surfaces. The new GTX model is fully breathable and 100% waterproof.

Areas of use: Work outside in cold climate.

#### **Original Heavy Duty models**

Durable workhorses designed for the harshest, most demanding work environments.

Areas of use: Building and construction and heavy-duty manufacturing. Outdoors and indoors.

#### **BOA®** Fit System built for heavy work

For comfort and easy closure: available on models 1358 and 1278.



On model 1358, Poron® XRD® foam is used on the sides, ankle and tongue of the shoe to protect the foot from outside impacts. This unique material feels remarkably soft until exposed to pressure or impact, when it hardens to help protect the foot from external forces. The material also provides superior ankle support.



JALAS® 1358 has Poron® XRD® foam padding on the sides and tongue of the shoe. An classification according to EN ISO 20345.





#### VIBRAM® **ARCTIC GRIP PLATFORM**

The Vibram® Arctic Grip platform prevents falls even on extremely slippery, oily, or icy surfaces. Unique gripping traction on icy surfaces using non-metal gripper lugs. Made of heatand oil-resistant HNBR rubber, which remains soft even in very cold climates, down to -40°C. Draining channels remove oil, water and dirt. Stabilising arch support system provides secure grip on ladders and adds stability.

- Withstands heat up to 300°C
- Fitting: Regular
- Slip resistance: SRC
- Antistatic
- Oil resistant









#### **BALANCE PLATFORM**

Our Balance platform provides a safe and secure grip. Made of nitrile rubber, an extremely durable material. Draining channels remove oil, water and dirt and provide flexibility where it matters. Different surface patterns provide grip in the different step phases. The Stabilizator arch support system provides secure grip on ladders and adds stability.

- Shock absorbing PU midsole
- Withstands heat up to 300°C
- Fitting: Regular
- Slip resistance: SRC
- ESD & Antistatic
- Oil resistant













Push to engage



Turn to tighten



Pull up for quick



S3 Models with balance platform



S3 SRC HRO M CI HI AN 🖊 🙆 🤷 🗟 🔿

**JALAS® HEAVY DUTY 1278** 

S3 SRC CI HRO HI 🕢 🙆 🙆 BOA

**S3** Winter models with Vibram® Arctic Grip



S3 Heat & welding with balance platform



**JALAS® HEAVY DUTY 1378B** 

S3 SRC CI HRO 💋 🙆 🛞 🦷





S3 SRC CI HRO HI WG 💋 🚳 🚷 🥱 🕒

JALAS® 1228W











The JALAS® Gran Premio footwear collection offer users a spacious fit. These shoes and boots offer a superior grip on cold and snowy surfaces and are suitable for heavy-duty conditions — both indoors and out.



**NAIL PROTECTION INSERT OF STEEL** for heavy-duty protection PTC NAIL PROTECTION INSERT (1808, 19485)

for light weight and comfort

**CONFIDENT STABILITY AND SECURE GRIP ON LADDERS** with Stabilizator arch support system

**WIDE FIT** Extra width and height for the foot



#### **ENDURO PLATFORM**

Made from nitrile rubber. Wide fit and shock absorption in the heel. Structural patterns ensure good grip sideways, forwards and backwards. Drain channels remove oil, water and dirt. Different surface patterns provide solid grip however you move. The Stabilizator system provides support for the arch and ensures good grip on ladders.

- Fitting: Wide
- Withstands heat up to 300°C
- Oil resistant
- ESD & Antistatic
- Slip resistance: SRC
























**JALAS® GRAN PREMIO 1558** 

S3 SRC CI HRO HI 🞧 🥖 🚳 🦱 BOA











**JALAS® GRAN PREMIO 1828** 

S3 SRC CI HRO HI 🔬 🥖 🙆







**JALAS® GRAN PREMIO 1598** 

S3 SRC CI HRO HI 🔬 💋 🚳 🥱 BOA









**JALAS® GRAN PREMIO 1938** 











**JALAS® GRAN PREMIO 1508** 









**JALAS® GRAN PREMIO 1808** 

S3 SRC CI HRO ⋒ 🥢 🙆 🛞 👔









S3 SRC CI HRO HI WG 🔬 🥢 🚳 🛞 🚳





**JALAS® GRAN PREMIO 1868W** 







**JALAS® GRAN PREMIO 1948S** 

S3 SRC HRO M CI HI 🞧 🧪 🚳 👸 🦱










**JALAS® GRAN PREMIO 1848K** 



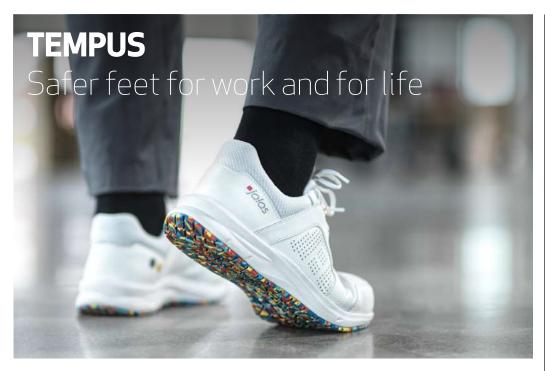

The JALAS® TEMPUS collection is a completely new line of Scandinavian quality safety shoes, developed especially for the manufacturing industries. The combination of safety and comfort protects your body from both injuries and muscle fatigue - helping you to feel more relaxed and secure at work. The JALAS® Tempus collection comes in four different styles. Everyone will find their favorite!

#### **LIGHT AND COMFORTABLE**

The highly breathable uppers made of microfibre and textile material contribute to a really light and dry feeling





#### **ACTIVE PLATFORM**

Our Active platform is made of highly durable nitrile rubber. EVA midsole: Optimal impact distribution.

- Fitting: Regular
- Oil resistant
- Slip resistance: SRC
- ESD & Antistatic











#### **NEW FX2 PRO INSOLE** FOR ULTIMATE COMFORT

The new FX2 Pro Slim insole has multiple layers and includes the advanced shock-absorbing Poron® XRD® material.



## S<sub>1</sub>P



JALAS® TEMPUS 5608

S1 P SRC 📵 🥢



JALAS® TEMPUS 5618

S1 P SRC 📵 🥢



JALAS® TEMPUS 5628


S1 P SRC 📵 🥢



JALAS® TEMPUS 5668

SIPSRC 📵 🕢 BOA°



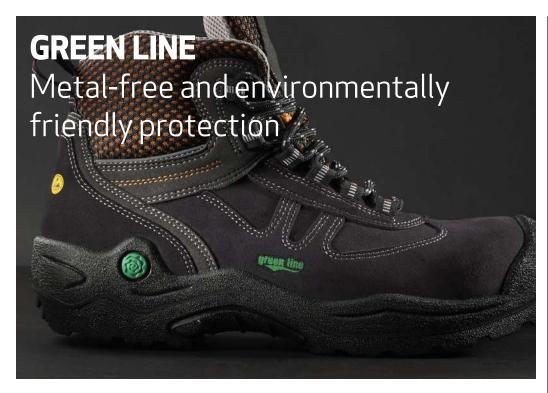

The shoes in JALAS® Green Line collection contain no metals; instead, for the anti-puncture protection and toecap, we use materials that are especially environment-friendly for the shoe's entire life cycle. These are comfortable, certified safety shoes for users wanting footwear that is made using independentlyverified, low-impact, earth-friendly processes and materials. Ideal for environments where metal-free shoes are a requirement. The FX2 Supreme insole with dual absorption zones comes as standard.

JALAS® Green Line is the first collection of safety footwear to be given the EU Ecolabel. The Ecolabel certificate is only awarded to products that meet the strict limit values specified for energy consumption and environmental friendliness and do not contain chemicals that are harmful to people or the environment.

Areas of use: Suitable for work where metal-free footwear is required, e.g., at nuclear power plants, airports, prisons, and in police work.



ADDED STABILITY with plastic shank piece

**METAL-FREE PROTECTION** with PTC penetrationresistant

SHOCK ABSORPTION **ZONE** with Poron® XRD®



#### **GREEN LINE PLATFORM**

Made from PU, a material suitable for many different environments. Suitable for work where metal-free footwear is required, e.g., at nuclear power plants, airports and prisons, and in police work.

- Fitting: Narrow/Regular
- Oil resistant
- ESD & Antistatic
- Slip resistance: SRC











#### THE EU ECOLABEL FOR **FOOTWEAR GUARANTEES:**

- Limited water pollution during production
- A reduction of emissions of volatile organic compounds during production
- The exclusion of substances harmful to the environment and health
- · Limited residues of metals and formaldehyde in the final product
- The use of recycled packaging
- The careful control of different aspects of durability







One of our most popular collections of safety shoes, and it's not hard to see why: JALAS® M-Sport is our lightest shoe collection, attractive and well-balanced. And above all, they are incredibly comfortable.

The E-Sport is further development of the original M-Sport collection. The White collection is based on the M-Sport platform.





#### M-SPORT PLATFORM

Made from PU, a material suitable for many different environments. Suitable for industrial work and artisans, both indoors and outdoors.

- Fitting: Regular
- ESD & Antistatic
- Oil resistant
- Slip resistance: SRC











#### **GRIP PLATFORM**

Our Grip platform is made of nitrile rubber, an extremely durable material. Suitable for industrial workers and craftsmen, both indoors and outdoors.

- Fitting: Regular
- Withstands heat up to 300°C
- Oil resistant
- ESD & Antistatic
- Slip resistance: SRB











for comfort and light weight



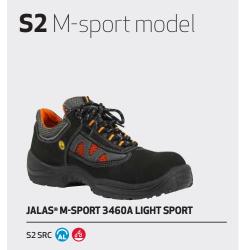

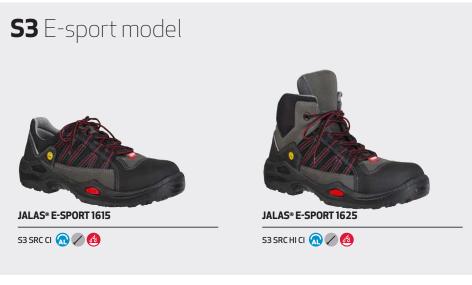









The VIP safety series is specially developed for management and office workers who need a business shoe with safety protection. Steel toecaps and PTC non-metallic sole inserts help protect feet from falling objects and nails and other sharp objects on the ground. For comfort and breathability, VIP safety shoes are made in full-grain leather with all-leather lining. Shockabsorbing insoles in Poron® XRD® material provide all-day comfort to both your feet and back. A rubber outsole with structure patterns gives a safer grip.

The VIP occupational series is a classic business shoe for workers in offices, hotels, restaurants, and other service sectors. These shoes are of course ESD compliant. A PU outsole gives a good and safe grip.



#### **VIP PLATFORM**

Made of nitrile rubber, an extremely durable material.


- Fitting: Narrow/Regular
- Oil resistant
- ESD & Antistatic









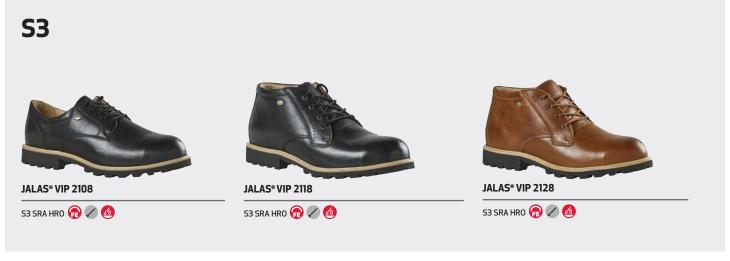



Inspired by sleek, modern sneakers, the JALAS® SPOC combines the safety and ergonomic comfort of an occupational shoe with a stylish new design. For many years, JALAS® users have praised the durability and ergonomic comfort of our safety shoes. Now we have put the same qualities into lightweight, sporty shoes specially designed for service industry applications. The optimal shock absorption of midsole and insole protects feet and back from injuries and makes the shoes comfortable for long work days.

The leather models are splash resistant and highly durable, while the textile models offer flexibility and enhanced breathability. The new JALAS® 5362 has a sock-like construction which makes the shoe easy to put on. Choose between laces or the BOA® Fit System. All the shoes in JALAS® SPOC (sporty occupational) collection are certified according to EN ISO 20347:2012, ensuring durability and safety.



#### **ACTIVE PLATFORM**

Made of highly durable nitrile EVA midsole: Optimal impact distribution.

- Fitting: Regular
- Oil resistant
- Slip resistance: SRC
- ESD & Antistatic













Push to engage



Turn to tighten



Pull up for quick release







OIAEFOSRC BOA



JALAS® SPOC 5362 OTAEFOSRC BOA



JALAS® SPOC 5462

OTAEFOSRC BOA

## **SAFETY & OCCUPATIONAL FOOTWEAR**

			DRY ENVIRONMENT	
			01 S1 S1P	S1 PS
OUTSOLE MATERIAL	Collection	Fit		
RPU outsole:  JALAS® most comfortable out soles are made of RPU, a revolutionary patented outsole technology with major grip and comfort advantages compared to conventional soles.	Zenit	Regular		
	Zenit Evo	Regular	7100 7118 7128 7158 BOA BOA	
	тю	Regular	2058 SOA	NEW
Nitrile outsole: Excellent durability. Very good grip on wet and icy surfaces. Heat-resistant up to 300°C (except the TEMPUS collection).	Exalter	Regular	9925 BOA	9935 BOA
	Dry lock	Regular + Wide		
	Heavy Duty	Regular		
	Gran Premio	Wide		
	Grip	Regular		
	Tempus	Regular	5608 5618 5628 5668 SOA	
	VIP	Narrow/ Regular		
<b>PU outsole:</b> Firm grip and high durability.	Green Line	Narrow/ Regular		
	M-Sport E-Sport	Regular		
	White	Regular		
Rubber & EVA: Outsole made of highly durable nitrile rubber. Optimal impact distribution with EVA midsole.	SPOC	Regular	NEW 5312 5382 5362 5462 BOA BOA BOA BOA	

			DRY TO WET ENVIRONMENT						
OUTSOLE			52 <u>@</u>	S3					S3S
MATERIAL	Collection	Fit		Low cut:		Mid & high cut			
<b>RPU outsole:</b> JALAS® most comfortable	Zenit	Regular		1738 SOA	3018	1718 BOA	2718 BOA	w	
JALAS* most comfortable out soles are made of RPU, a revolutionary patented outsole technology with major grip and comfort advantages compared to	Zenit Evo	Regular		7138 BOA	7168 BOA	7178 BOA			
conventional soles.	тю	Regular		2028 BOA	2068 BOA				
	Exalter	Regular		9965 BOA	9968 BOA	9985 BOA	9955	9988 BOA	9995 BOA
	Dry lock	Regular + Wide			WR: Water resistant			WR: Water resistant	
Nitrile outsole:	Heavy Duty	Regular			ARCTIC GRIP PRO	1358 BOA	1278 BOA		
Excellent durability. Very good grip on wet and icy surfaces. Heat-resistant up to 300°C (except the TEMPUS collection).	Gran Premio	Wide	_	1558 BOA		1828	1938	1598 BOA	
	Grip	Regular	3780						
	Tempus	Regular							
	VIP	Narrow/ Regular			2108	2118	2128	siness shoes with safety protection	
	Green Line	Narrow/ Regular		6468 metal free		6498 metal free			
<b>PU outsole:</b> Firm grip and high durability.	M-Sport E-Sport	Regular	3460A	1615		1625			
	White	Regular	3520						
<b>Rubber &amp; EVA:</b> Outsole made of highly durable nitrile rubber. Optimal impact distribution with EVA midsole.	SPOC	Regular							

# **SAFETY & OCCUPATIONAL FOOTWEAR**

			COLD ENVIRONM	ENT	HEAT & WELDING	CHAINSAW PROTECTION	
OUTSOLE MATERIAL	Collection	Fit	52 CI <b>₫ ※</b>	S3 CI ⊘/ <mark>⊘</mark> ⓓ ��	S3 WI	S3 Ø Ø	EN ISO 17249: 2013 LEVEL 2
RPU outsole: JALAS® most comfort- able out soles are made of RPU, a revolutionary patented outsole tech-	Zenit	Regular					
nology with major grip and comfort advantages compared to conven- tional soles.	Zenit Evo	Regular					
	Exalter	Regular					
	Dry lock	Regular + Wide	WR: Wa resista	3325 3328			
Nitrile outsole:	Heavy Duty	Regular	diazzirak	NEW 1378B	ARCTIC GRIP PRO PRO	1228W BOA	
Excellent durability. Very good grip on wet and icy surfaces. Heat-resistant up to 300°C (except the TEMPUS collec- tion).	Gran Premio	Wide	1870	1508 1878 SOA	1808	19485 1848K	1868W
,	Grip	Regular					
	Tempus	Regular					
		Narrow/ Regular					1988 GTX
	Green Line	Narrow/ Regular					
<b>PU outsole:</b> Firm grip and high durability.	M-Sport E-Sport	Regular					
	White	Regular					
Rubber & EVA: Outsole made of highly durable nitrile rubber. Optimal im- pact distribution with EVA midsole.	SPOC	Regular					

# SAFETY RATING **S1**

- Protective toe cap
- Fully enclosed heel
- Electrical resistance (between 0.1-1000 MegaOhms)
- Energy absorption in the heel area (tested at 20 Joules)

## **SAFETY FOOTWEAR | SAFETY RATING S1**

# Jalas° ZENIT EVO 7100

A light, soft, comfortable safety shoe with quality protection and outstanding ergonomics. The shoe supports and protects your feet in light duty work.

TOECAP MATERIAL Aluminium

FITTING Regular

**SIZE RANGE (US M)** 3.5 – 13.5

**SIZE RANGE (US W)** 4 – 14.5

PLATFORM Custom

**SOLE MATERIAL** PU midsole, plastic shank, RPU outsole

INSOLE FX3 Supreme

INSOLE MATERIAL Textile, soft EVA, rigid EVA, polyester-based conductive thread, neo foam, double shock absorption zones in PORON® XRD®

UPPER MATERIAL Knitted textile

LINING MATERIAL Polyester

FEATURES Low weight, oil-resistant outsole, antistatic properties, bellows tongue, padded shaft edge in memory foam, ventilating insole, ergonomically shaped, soft, conforms with IEC 61340-5-1 (ESD)



**GIVES YOU THE POWER TO MOVE** 



















# SAFETY RATING **S1 P**

- Protective toe cap
- Penetration-resistant outsole
- Fully enclosed heel
- Electrical resistance (between 0.1-1000 MegaOhms)
- Energy absorption in the heel area (tested at 20 Joules)

### SAFETY FOOTWEAR | SAFETY RATING S1 P

# **■**jalas° ZENIT EVO **7118**

A comfortable safety shoe with sport-inspired design, BOA $^\circ$  Fit System and high-quality protection.

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

**SIZE RANGE (US M)** 3.5 - 13.5

**SIZE RANGE (US W)** 4 - 14.5

**PLATFORM** Custom

SOLE MATERIAL PU midsole, plastic shank, RPU outsole

**INSOLE** FX3 Supreme

INSOLE MATERIAL Textile, soft EVA, rigid EVA, polyester-based conductive thread, neo foam, double shock absorption zones in PORON® XRD®

UPPER MATERIAL Knitted textile

LINING MATERIAL Polyester

FEATURES Low weight, oil-resistant outsole, antistatic properties, bellows tongue, padded shaft edge in memory foam, ventilating insole, BOA® Fit System, ergonomically shaped, conforms with IEC 61340-5-1



**COMFORT FOR LONG DAYS AT** WORK, BOA®















ASTM F2413-18 EN ISO 20345:2011 S1, P, SRC

# **■***j***a***l***a***s*°ZENITEV0 **7128**

A comfortable safety shoe with sport-inspired design, laces and high-quality protection.

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

**SIZE RANGE (US M)** 3.5 – 13.5

**SIZE RANGE (US W)** 4 – 14.5

**PLATFORM** Custom

**SOLE MATERIAL** PU midsole, plastic shank, RPU outsole

**INSOLE** FX3 Supreme

INSOLE MATERIAL Textile, soft EVA, rigid EVA, polyester-based conductive thread, neo foam, double shock absorption zones in PORON® XRD®

UPPER MATERIAL Knitted textile

LINING MATERIAL Polyester

FEATURES Low weight, oil-resistant outsole, antistatic properties, bellows tongue, padded shaft edge in memory foam, ventilating insole, ergonomically shaped, soft, conforms with IEC 61340-5-1 (ESD)



**COMFORT FOR LONG DAYS AT WORK, LACES** 





ASTM F2413-18 EN ISO 20345:2011













A comfortable safety shoe with colorful sport-inspired design, BOA® Fit System and high-quality protection.

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

**TOECAP MATERIAL** Aluminium

FITTING Regular

**SIZE RANGE (US M)** 3.5 – 13.5

**SIZE RANGE (US W)** 4 – 14.5

**PLATFORM** Custom

SOLE MATERIAL PU midsole, plastic shank, RPU outsole

INSOLE FX3 Supreme

INSOLE MATERIAL Textile, soft EVA, rigid EVA, polyester-based conductive thread, neo foam, double shock absorption zones in PORON® XRD®

UPPER MATERIAL Knitted textile, Microfiber

LINING MATERIAL Polyester

FEATURES Low weight, oil-resistant outsole, anti-static properties, bellows tongue, ventilating insole, BOA® Fit System, ergonomically shaped, conforms with IEC 61340-5-1 (ESD), free from animal-derived materials



**COMFORTABLE** AND A LITTLE **MORE COLORFUL** 



















ASTM F2413-18 EN ISO 20345:2011 SD 35 PR S1, P, SRC

# **■**jalas® TEMPUS **5608**

Safe and sporty shoe for both work and leisure. Very light and comfortable with multicolor outsole, advanced shock absorbing, protective toe cap and nail penetration insert.

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Steel

FITTING Narrow/Regular

**SIZE RANGE (US M)** 3.5 - 13.5

**SIZE RANGE (US W)** 4 – 14.5 **PLATFORM** Active

SOLE MATERIAL EVA, nitrile rubber outsole

INSOLE FX2 Pro Slim

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in PORON® XRD®

UPPER MATERIAL Microfiber, Textile

LINING MATERIAL Polyester, polyamide

FEATURES Low weight, oil-resistant outsole, antistatic properties, bellows tongue, ventilating insole, ergonomically shaped, soft, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)



SAFE AND **SPORTY FOR WORK AND LEISURE** 

















ASTM F2413-18 EN ISO 20345:2011 **SD 35 PR** S1, P, SRC

# **|***ialas*<sup>®</sup> TEMPUS **5618**

Light weight safety shoe for work and leisure. Breathable, sporty and comfortable with advanced shock absorbing, protective toe cap and nail penetration insert.

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Steel

FITTING Narrow/Regular

**SIZE RANGE (US M)** 3.5 – 13.5

**SIZE RANGE (US W)** 4 – 14.5

**PLATFORM** Active

SOLE MATERIAL EVA, nitrile rubber outsole

**INSOLE** FX2 Pro Slim

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in PORON® XRD®

**UPPER MATERIAL** Microfiber, Textile

LINING MATERIAL Polyester, polyamide

FEATURES Low weight, oil-resistant outsole, antistatic properties, bellows tongue, ventilating insole, ergonomically shaped, soft, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)



**LIGHT WEIGHT, FOR WORK AND LEISURE** 

















ASTM F2413-18 EN ISO 20345:2011 S1, P, SRC

Light weight safety shoe with pink details for work and leisure. Breathable, sporty and comfortable with advanced shock absorbing, toe cap and nail penetration insert.

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Steel

FITTING Narrow/Regular

**SIZE RANGE (US M)** 3.5 - 9

**SIZE RANGE (US W)** 4 - 10

**PLATFORM** Active

SOLE MATERIAL EVA, nitrile rubber outsole

**INSOLE FX2 Pro Slim** 

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in PORON® XRD®

**UPPER MATERIAL** Microfiber, Textile

LINING MATERIAL Polyester, polyamide

FEATURES Low weight, oil-resistant outsole, antistatic properties, bellows tongue, ventilating insole, ergonomically shaped, soft, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)



**FOR WORK AND LEISURE WITH PINK DETAILS** 













ASTM F2413-18 EN ISO 20345:2011 S1, P, SRC

# *■jalas*°TEMPUS **5668**

Safety shoe for both work and leisure. Very light and comfortable with green details, BOA® Fit System, shock absorbing, protective toe cap and nail penetration insert.

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Steel

FITTING Narrow/Regular

**SIZE RANGE (US M)** 3.5 - 13.5

**SIZE RANGE (US W)** 4 - 14.5

**PLATFORM** Active

SOLE MATERIAL EVA, nitrile rubber outsole

INSOLE FX2 Pro Slim

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in PORON® XRD®

UPPER MATERIAL Microfiber, Textile

LINING MATERIAL Polyester, polyamide

FEATURES Low weight, oil-resistant outsole, anti-static properties, bellows tongue, ventilating insole, BOA® Fit System, ergonomically shaped, soft, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)



**SAFE AND SPORTY WITH BOA® FIT SYSTEM** 



















SD 35 PR

ASTM F2413-18 EN ISO 20345:2011 S1, P, SRC

# **■***jalas*°TI0 **2058**

A breathable safety shoe with high-quality protection (S 1P). Ultimate softness and comfort thanks to the TIO (Three In One) sole. Tri-panel BOA® Fit System for perfect fit.

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

**SIZE RANGE (US M)** 3.5 - 13.5

**SIZE RANGE (US W)** 4 – 14.5

**PLATFORM** TIO

SOLE MATERIAL PU midsole, plastic shank, RPU outsole

INSOLE JALAS 8304 FX3 Soft

UPPER MATERIAL CPU overmolding, Microfiber, Textile

LINING MATERIAL Polyester

FEATURES Oil-resistant outsole, anti-static properties, ventilating insole, BOA® Fit System, ESD, anatomically designed, ergonomically shaped, soft, shock absorbing, double shock absorption zones, conforms with IEC 61340-5-1 (ESD), free from animal-derived materials



**THREE IN ONE SOLE. HIGH BREATHABILITY** 





ComSoft Air











ASTM F2413-18 **SD 35 PR** 

EN ISO 20345:2011 S1,P,SRC





This low-cut safety shoe has the features you need for most work situations, such as textile nail protection, toecap in aluminum and high-grip Vibram Nitrile rubber outsole.

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

**SIZE RANGE (US M)** 2,5 – 13

**SIZE RANGE (US W)** 3,5 - 14 PLATFORM Performance

SOLE MATERIAL PU midsole, plastic shank, nitrile

rubber outsole

INSOLE JALAS 8303 FX3 Supreme







INSOLE MATERIAL Textile, soft EVA, rigid EVA, polyester-based conductive thread, neo foam, double shock absorption zones in PORON® XRD®

**UPPER MATERIAL** Microfiber, Textile

LINING MATERIAL Polyester

FEATURES Breathable mesh, heat-resistant outsole,  $\hbox{oil-resistant outsole, anti-static properties, polstered}\\$ shaft edge, ventilating insole, BOA® Fit System, quicktie, stabilizator, ergonomically shaped, soft, specially designed details, double shock absorption zones, conforms with IEC 61340-5-1 (ESD), free from animalderived materials



**LOW-CUT WITH VENTILATION AND BOA®** 

















ASTM F2413-18

EN ISO 20345:2011 S1,P,SRC,HRO





# SAFETY RATING **S1 PS**

- Protective toe cap
- Penetration-resistant outsole
- Non-metal insert
- Electrical resistance (between 0.1-1000 MegaOhms)
- Energy absorption in the heel area (tested at 20 Joules)

### SAFETY FOOTWEAR | SAFETY RATING S1 PS

# NEW Jalos EXALTER 9935

Our best-selling breathable and ventilated safety shoe, now made from more sustainable materials. Bio-based upper, less plastic, recycled outsole and BOA® Fit system.

NAIL PROTECTION MATERIAL EcoFlex Zero perforation textile

TOECAP MATERIAL Aluminium

FITTING Regular

**SIZE RANGE (US M)** 2,5 - 13

**SIZE RANGE (US W)** 3,5 - 14

**PLATFORM** Performance **SOLE MATERIAL** PU midsole, plastic shank,

nitrile rubber outsole

INSOLE IAL AS 8304 FX3 Soft **UPPER MATERIAL** Microfiber

FEATURES Breathable mesh, heat-resistant outsole, oil-resistant outsole, anti-static properties, polstered shaft edge, ventilating insole, BOA® Fit System, quick-tie, stabilizator, ergonomically shaped, soft, specially designed details, double shock absorption zones, conforms with IEC 61340-5-1 (ESD), free from animalderived materials



**NEW SUSTAINABLE GENERATION** 



**EcoFlex** 

























EN ISO 20345:2022 S1,PS,HRO,FO,SC



# SAFETY RATING **S2**

- Protective toe cap
- Water-repellent upper
- · Fully enclosed heel
- Electrical resistance (between 0.1–1000 MegaOhms)
- Energy absorption in the heel area (tested at 20 Joules)

# SAFETY FOOTWEAR | SAFETY RATING S2

# *■jalas*®GRIP 3780 FOODS

This boot provides the highest protection in high hygienic requirement areas. It is extra comfortable with excellent grip and perfect fit, water repellant and oil resistant.

TOECAP MATERIAL Aluminium

FITTING Regular

**SIZE RANGE (US M)** 4 – 13

**SIZE RANGE (US W)** 5 - 14

**PLATFORM** Grip

**SOLE MATERIAL** PU midsole, plastic shank, nitrile rubber outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in







UPPER MATERIAL PU-coated leather LINING MATERIAL Polyester, polyamide

FEATURES Heat-resistant outsole, oil-resistant outsole, anti-static properties, padded boot shaft, ventilating insole, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)



**FOR HIGH HYGIENIC REQUIREMENT AREAS** 
















# *■jalas*°M-SPORT **3460A LIGHT SPORT**

Safety shoe, toecap material aluminium, plastic shank, PU outsole, upper material split leather; Textile

TOECAP MATERIAL Aluminium

**FITTING** Regular

**SIZE RANGE (US M)** 4 – 13

**SIZE RANGE (US W)** 5 – 14

PLATFORM M-Sport

SOLE MATERIAL Plastic shank, PU outsole

**INSOLE** FX2 Classic

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, shock absorption zone in Ergothan

UPPER MATERIAL Split leather, Textile


LINING MATERIAL Polyester, polyamide

FEATURES Low weight, oil-resistant outsole, antistatic properties, polstered shaft edge, ventilating insole, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)





















## SAFETY FOOTWEAR | SAFETY RATING S2

# ■jalas®WHITE 3520

Comfort and durability meet in an easy-clean safety shoe with (S2) protection in striking white design. The PU-coated leather upper supports and stabilises feet while the ventilating inner sole keeps them cool.

TOECAP MATERIAL Aluminium

FITTING Regular

**SIZE RANGE (US M)** 4 - 13

SIZE RANGE (US W) 5 - 14

PLATFORM M-Sport

SOLE MATERIAL Plastic shank, PU outsole

INSOLE FX2 Pro

 $\textbf{INSOLE MATERIAL} \ \mathsf{Textile}, \mathsf{soft} \ \mathsf{EVA}, \mathsf{polyester-based}$ conductive thread, double shock absorption zones in PORON® XRD®

UPPER MATERIAL PU-coated leather

LINING MATERIAL Polyester, polyamide

**FEATURES** Oil-resistant outsole, anti-static properties, polstered shaft edge, ventilating insole, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)



















ASTM F2413-18 EN ISO 20345:2011 SD 35 PR



# SAFETY RATING **S3**

- Protective toe cap
- Penetration-resistant outsole
- Water-repellent upper
- Fully enclosed heel
- Electrical resistance (between 0.1-1000 MegaOhms)

INSOLE MATERIAL Textile, soft EVA, polyester-

UPPER MATERIAL CPU overmolding, Microfiber,

based conductive thread, PU, double shock absorption zones in PORON® XRD®

FEATURES Oil-resistant outsole, anti-static

ESD, anatomically designed, ergonomically

shaped, soft, shock absorbing, double shock

properties, ventilating insole, BOA® Fit System,

absorption zones, conforms with IEC 61340-5-1

Energy absorption in the heel area (tested at 20 Joules)

# SAFETY FOOTWEAR | SAFETY RATING S3: LOW CUT

# **■***jalas*°TI0 2068

A soft and water repellent safety shoe. Ultimate softness and comfort thanks to the stable TIO (Three In One) sole. Tri-panel BOA® Fit System for perfect fit.

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

**SIZE RANGE (US M)** 3.5 – 13.5

**SIZE RANGE (US W)** 4 – 14.5


**PLATFORM** TIO

SOLE MATERIAL PU midsole, plastic shank, RPU outsole

INSOLE JALAS 8304 FX3 Soft







Textile









THREE IN ONE SOLE. **TRI-PANEL BOA** 





















SD 35 PR

S3,SRC

EN ISO 20345:2011



LINING MATERIAL Polyester

# **■***jalas*°TI0 2028

A soft and water repellent safety shoe with high-quality protection. Ultimate softness and comfort thanks to the TIO (Three In One) sole and the BOA® Fit System.

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

**TOECAP MATERIAL** Aluminium

FITTING Regular

**SIZE RANGE (US M)** 3.5 – 13.5

**SIZE RANGE (US W)** 4 – 14.5

**PLATFORM** TIO

SOLE MATERIAL PU midsole, plastic shank, RPU outsole

INSOLE JALAS 8304 FX3 Soft

INSOLE MATERIAL Textile, soft EVA, polyesterbased conductive thread, PU, double shock absorption zones in PORON® XRD®

UPPER MATERIAL CPU overmolding, Microfiber,

FEATURES Oil-resistant outsole, anti-static properties, ventilating insole, BOA® Fit System, ESD, anatomically designed, ergonomically shaped, soft, shock absorbing, double shock absorption zones, conforms with IEC 61340-5-1 (ESD), free from animal-derived materials



**THREE IN ONE SOLE. WATER** REPELLENT.



ComSoft Air



















ASTM F2413-18 EN ISO 20345:2011 S3,SRC



# **Jalas** Zenit **1738**

Comfort and protection in a safety shoe with unique BOA® Fit System and PU-coated and split leather upper. Excellent ergonomics and anti-static qualities for better fit and merino wool inner sole keeps feet

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

**SIZE RANGE (US M)** 4 – 13

SIZE RANGE (US W) 5 - 14

**PLATFORM** Zenit

SOLE MATERIAL PU midsole, plastic shank, RPU outsole

INSOLE FX2 Supreme





INSOLE MATERIAL Textile, soft EVA, polyesterbased conductive thread, Merino wool, double shock absorption zones in PORON® XRD®

UPPER MATERIAL PU-coated leather, Split leather

PRONOSE-MATERIAL PU

LINING MATERIAL Polyester, polyamide

FEATURES ProNose toe reinforcement, oil-resistant outsole, anti-static properties, polstered shaft edge, ventilating insole, BOA® Fit System, quick-tie, stabilizator, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)























ASTM F2413-18 EN ISO 20345:2011 **SD 35 PR** S3, SRC

# Jalas Zenit 3018

A light, comfortable and stylish safety shoe inspired by sport footwear with highest (S3) protection rating. The PU-coated and split leather upper and padded Memory foam supports and protects in outdoor

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

**SIZE RANGE (US M)** 4 – 13

SIZE RANGE (US W) 5 - 14

**PLATFORM** Zenit

SOLE MATERIAL PU midsole, plastic shank, RPU outsole

INSOLE FX2 Supreme

INSOLE MATERIAL Textile, soft EVA, Merino wool, double shock absorption zones in PORON® XRD®

UPPER MATERIAL PU-coated leather, Split leather

PRONOSE-MATERIAL PU

LINING MATERIAL Polyamide, polyester

FEATURES ProNose toe reinforcement, oil-resistant outsole, anti-static properties, padded shaft edge in memory foam, ventilating insole, stabilizator, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

























# **■***jolos*®ZENITEVO **7138**

A lightweight safety shoe with knitted textile upper and BOA® Fit System. Outstanding ergonomics, padded  $\label{lem:memory foam and water repellency means day-long safety and comfort.$ 

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

**SIZE RANGE (US M)** 3.5 - 13.5

**SIZE RANGE (US W)** 4 - 14.5

**PLATFORM** Custom

SOLE MATERIAL PU midsole, plastic shank, RPU outsole

INSOLE FX3 Supreme

INSOLE MATERIAL Textile, soft EVA, rigid EVA, polyester-based conductive thread, neo foam, double shock absorption zones in PORON® XRD®

UPPER MATERIAL Knitted textile

LINING MATERIAL Polyester

FEATURES Low weight, oil-resistant outsole, antistatic properties, bellows tongue, padded shaft edge in memory foam, ventilating insole, BOA® Fit System, water repellent, ergonomically shaped, conforms with IEC 61340-5-1 (ESD)



**A LIGHTER SHOE FOR THOSE ON** THE GO























ASTM F2413-18 EN ISO 20345:2011 **SD 35 PR** S3, SRC

A lightweight safety shoe with knitted textile upper and BOA® Fit System. Outstanding ergonomics, padded Memory foam and water repellency means day-long safety and comfort.

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

**TOECAP MATERIAL** Aluminium

FITTING Regular

**SIZE RANGE (US M)** 3.5 - 13.5

**SIZE RANGE (US W)** 4 - 14.5

**PLATFORM** Custom

SOLE MATERIAL PU midsole, plastic shank, RPU outsole

INSOLE FX3 Supreme

INSOLE MATERIAL Textile, soft EVA, rigid EVA, polyester-based conductive thread, neo foam, double shock absorption zones in PORON® XRD®

UPPER MATERIAL Knitted textile

LINING MATERIAL Polvester

FEATURES Low weight, oil-resistant outsole, antistatic properties, bellows tongue, padded shaft edge in memory foam, ventilating insole, BOA® Fit System, water repellent, ergonomically shaped, conforms with IEC 61340-5-1 (ESD)



A LIGHTER SHOE **FOR THOSE ON** THE GO

















DIALED IN. PRECISION FIT.

ASTM F2413-18 EN ISO 20345:2011 S3, SRC

# **Jalas** ZENITEVO **7168**

A new designed lightweight safety shoe with knitted textile upper and BOA® Fit System. Outstanding ergonomics, padded Memory foam and water repellency means day-long safety and comfort.

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

**SIZE RANGE (US M)** 3.5 - 13.5

**SIZE RANGE (US W)** 4 - 14.5

**PLATFORM** Custom

SOLE MATERIAL PU midsole, plastic shank, RPU outsole

**INSOLE** FX3 Supreme

INSOLE MATERIAL Textile, soft EVA, rigid EVA, polyester-based conductive thread, neo foam, double shock absorption zones in PORON® XRD®

UPPER MATERIAL Knitted textile, Microfiber

LINING MATERIAL Polyester

FEATURES Low weight, oil-resistant outsole, anti-static properties, bellows tongue, ventilating insole, BOA® Fit System, water repellent, ergonomically shaped, conforms with IEC 61340-5-1 (ESD), free from animalderived materials



**GOOD LOOKING** AND SAFE ON THE MOVE


























# **■***iolos*°EXALTER **9965**

This low-cut safety shoe has the features you need for most work situations, such as textile nail protection, toecap in aluminum and high-grip Vibram Nitrile rubber outsole.

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

**SIZE RANGE (US M)** 2,5 - 13

**SIZE RANGE (US W)** 3,5 - 14

PLATFORM Performance

**SOLE MATERIAL** PU midsole, plastic shank, nitrile rubber outsole

**INSOLE** FX3 Supreme

INSOLE MATERIAL Textile, soft EVA, rigid EVA, polyester-based conductive thread, neo foam, PORON®

UPPER MATERIAL Microfiber, Textile

LINING MATERIAL Polyester

FEATURES Heat-resistant outsole, oil-resistant outsole, anti-static properties, polstered shaft edge, ventilating insole, BOA® Fit System, quick-tie, stabilizator, water repellent, ergonomically shaped, soft, specially designed details, double shock absorption zones, conforms with IEC 61340-5-1 (ESD) free from animal-derived materials



LOW-CUT, WATER **REPELLANT** WITH BOA®



DIALED IN. PRECISION FIT.



























SD 35 PR

ASTM F2413-18 EN ISO 20345:2011 S3, SRC, HRO

This low-cut safety shoe has the features you need for most work situations, such as textile nail protection, toecap in aluminum and high-grip Vibram Nitrile rubber outsole.

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

**TOECAP MATERIAL** Aluminium

FITTING Regular

**SIZE RANGE (US M)** 2,5 - 13

**SIZE RANGE (US W)** 3,5 - 14

**PLATFORM** Performance

**SOLE MATERIAL** PU midsole, plastic shank, nitrile rubber outsole

**INSOLE** FX3 Supreme

INSOLE MATERIAL Textile, soft EVA, rigid EVA, polyester-based conductive thread, neo foam, PORON® XRD®

UPPER MATERIAL Microfiber, Textile

LINING MATERIAL Polyester

FEATURES Heat-resistant outsole, oil-resistant outsole, anti-static properties, polstered shaft edge, ventilating insole, stabilizator, water repellent, ergonomically shaped, soft, specially designed details, double shock absorption zones, conforms with IEC 61340-5-1 (ESD), free from animal-derived materials



LOW-CUT. WATER REPELLANT **WITH LACES** 























ASTM F2413-18 EN ISO 20345:2011 SD 35 PR

# ■jalas® EXALTER 9968 GTX

A light, comfortable, safety shoe with side-mounted BOA®. Waterproof due to GORE-TEX. Its Microfiber upper and sock-like construction provides great comfort and fit.

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

**SIZE RANGE (US M)** 2,5 - 13

**SIZE RANGE (US W)** 3.5 - 14

**PLATFORM** Performance

SOLE MATERIAL PU midsole, plastic shank, nitrile rubber outsole

**INSOLE** FX3 Supreme

INSOLE MATERIAL Textile, soft EVA, rigid EVA, polyesterbased conductive thread, neo foam, PORON® XRD®

UPPER MATERIAL Microfiber, Textile

LINING MATERIAL Polyamide

FEATURES GORE-TEX Extended Comfort Footwear technology, heat-resistant outsole, oil-resistant outsole, anti-static properties, polstered shaft edge, ventilating insole, BOA® Fit System, quick-tie, stabilizator, waterproof, ergonomically shaped, soft, specially designed details, double shock absorption zones, conforms with IEC 61340-5-1 (ESD), free from animal-derived materials



A LOW-CUT SAFETY SHOE, **NOW WITH GORE-TEX** 



DIALED IN. PRECISION FIT.

GO'RE-TEX





















ASTM F2413-18 EN ISO 20345:2011 SD 35 PR

S3, SRC, WR, HRO

# *■jalas*°Gran Premio **1558 GP**

Low-cut shoe with extra width. Excellent protection in harsh environments. BOA® Fit System for perfect fit and easy putting on and taking off.

NAIL PROTECTION MATERIAL Steel

**TOECAP MATERIAL** Aluminium FITTING Wide

**SIZE RANGE (US M)** 3.5 - 15.5

**SIZE RANGE (US W)** 4 - 16,5 **PLATFORM** Enduro

SOLE MATERIAL PU midsole, nitrile rubber outsole

INSOLE FX2 Supreme INSOLE MATERIAL Textile, soft EVA, polyesterbased conductive thread, Merino wool, double shock absorption zones in PORON® XRD®

UPPER MATERIAL PU-coated leather, Textile

PRONOSE-MATERIAL PU

LINING MATERIAL Polyamide

FEATURES ProNose toe reinforcement, wide fit, heatresistant outsole, oil-resistant outsole, anti-static properties, bellows tongue, polstered shaft edge, ventilating insole, BOA® Fit System, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)



**LOW AND WIDE FOR TOUGH CONDITIONS** 



DIALED IN. PRECISION FIT.



























SD 35 PR

ASTM F2413-18 EN ISO 20345:2011 S3, SRC, CI, HRO, HI



### SAFETY FOOTWEAR | SAFETY RATING S3: LOW CUT

# **■***jalas*® VIP **2108**

Safety shoe, nail protection material plasma-treated composite (PTC) textile, toecap material steel, rubber outsole, upper material full-grain leather.

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Steel

FITTING Narrow/Regular **SIZE RANGE (US M)** 3.5 – 13.5

**SIZE RANGE (US W)** 4 - 14.5

SOLE MATERIAL Nitrile rubber outsole

INSOLE FX2 VIP Safety

INSOLE MATERIAL Leather, soft EVA, polyester-based conductive thread, double shock absorption zones in

UPPER MATERIAL Full-grain leather LINING MATERIAL Leather

FEATURES Anti-static properties, ventilating insole, water repellent leather, specially designed details, shock absorbing, conforms with IEC 61340-5-1 (ESD)



















ASTM F2413-18 EN ISO 20345:2011 S3, SRA, HRO

# ■jalas® Green Line 6468 EKO

First safety shoe with EU-Ecolabel. Metal-free with nail protection, toe cap and the FX2 Supreme insole.

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

**TOECAP MATERIAL** Composite

FITTING Narrow/Regular

**SIZE RANGE (US M)** 4 - 13 SIZE RANGE (US W) 5 - 14

**PLATFORM** Green Line

SOLE MATERIAL Plastic shank, PU outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in PORON® XRD®

UPPER MATERIAL Microfiber, Textile

PRONOSE-MATERIAL PU

LINING MATERIAL Polyamide

FEATURES ProNose toe reinforcement, oil-resistant outsole, metal free, anti-static properties, ventilating insole, water repellent, double shock absorption zones, conforms with  $\stackrel{\cdot}{\text{IEC}}\,61340\text{-}5\text{-}1$  (ESD), good environmental choice, meets the EU flower environmental criteria, free from animal-derived materials



THE FIRST **SAFETY SHOE WITH EU-ECOLABEL** 





ASTM F2413-18 EN ISO 20345:2011 S3. SRC



















# **■***jalas*° E-SPORT **1615**

A light, comfortable and attractive safety shoe with water-repellent properties and highest (S3) protection. The PU-coated and split leather upper and ventilating inner sole offer excellent safety and ergonomics.

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

**SIZE RANGE (US M)** 4 – 13

**SIZE RANGE (US W)** 5 - 14

PLATFORM M-Sport

SOLE MATERIAL Plastic shank, PU outsole

INSOLE FX2 Classic

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, shock absorption zone in Ergothan

UPPER MATERIAL PU-coated leather, Split leather

LINING MATERIAL Polyester, polyamide  $\textbf{FEATURES} \ \mathsf{Low} \ \mathsf{weight}, \mathsf{oil}\text{-resistant} \ \mathsf{outsole}, \mathsf{anti}\text{-static}$ 

properties, polstered shaft edge, ventilating insole, water repellent, reflector, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)























ASTM F2413-18 EN ISO 20345:2011 S3. SRC. CI

# **■**jalas® ZENIT 2718

Premium shoe with ankle support for all year use with JALAS® C2 Climate Control ventilating system which has been designed to keep feet dry, and also warm in cool temperatures.

NAIL PROTECTION MATERIAL Steel

TOECAP MATERIAL Aluminium

FITTING Regular

**SIZE RANGE (US M)** 4 - 13

**SIZE RANGE (US W)** 5 - 14

**PLATFORM** Zenit

**SOLE MATERIAL** PU midsole, RPU outsole

INSOLE JALAS 8217 FX2 Climate

INSOLE MATERIAL Textile, soft EVA, polyesterbased conductive thread, Merino wool, double

shock absorption zones in PORON® XRD®

 $\textbf{UPPER MATERIAL} \ \mathsf{PU-coated} \ \mathsf{leather}, \mathsf{Split}$ 

PRONOSE-MATERIAL PU

LINING MATERIAL Polyamide, polyester

FEATURES ProNose toe reinforcement, oilresistant outsole, anti-static properties, bellows tongue, padded boot shaft, polstered shaft edge, BOA® Fit System, ankle support, pull loops, ESD, ergonomically shaped, soft, specially designed





MID CUT WITH C<sup>2</sup> CLIMATE **CONTROL SYSTEM** 



























EN ISO 20345:2022 S3,SR,CI,F0,SC,LG



A soft, light and ergonomic mid-cut safety boot with BOA® Fit System and highest (S3) level protection. The PU-coated and split leather upper offer water repellent properties and great fit for long days on your feet.

NAIL PROTECTION MATERIAL Steel

TOECAP MATERIAL Aluminium

FITTING Regular

**SIZE RANGE (US M)** 4 - 13

**SIZE RANGE (US W)** 5 - 14

**PLATFORM** Zenit

SOLE MATERIAL PU midsole, RPU outsole

INSOLE FX2 Supreme

INSOLE MATERIAL Textile, soft EVA, polyesterbased conductive thread, Merino wool, double shock absorption zones in PORON® XRD®

UPPER MATERIAL PU-coated leather, Split leather

PRONOSE-MATERIAL PU

LINING MATERIAL Polyester, polyamide

FEATURES ProNose toe reinforcement, oil-resistant outsole, anti-static properties, bellows tongue, padded boot shaft, ventilating insole, quick-tie, stabilizator, pull loops, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)





















ASTM F2413-18 EN ISO 20345:2011 S3, SRC

# **Jalas** Zenitevo **7178**

A mid-cut lightweight safety shoe with ankle support, knitted textile upper and BOA® Fit System. Outstanding ergonomics and water repellency means day-long safety and comfort.

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

**SIZE RANGE (US M)** 3.5 - 13.5

**SIZE RANGE (US W)** 4 - 14.5

**PLATFORM** Custom

SOLE MATERIAL PU midsole, plastic shank, RPU outsole

**INSOLE** FX3 Supreme

INSOLE MATERIAL Textile, soft EVA, rigid EVA, polyester-based conductive thread, neo foam, double shock absorption zones in PORON® XRD®

UPPER MATERIAL Knitted textile, PU-coated leather

PRONOSE-MATERIAL PU

LINING MATERIAL Polyester

FEATURES Low weight, oil-resistant outsole, antistatic properties, bellows tongue, polstered shaft edge, ventilating insole, BOA® Fit System, ankle support, water repellent, ergonomically shaped, conforms with IEC 61340-5-1 (ESD)



MID CUT WITH **EXTRA ANKLE SUPPORT** 















ASTM F2413-18 EN ISO 20345:2011 S3 SRC

SD 35 PR

# **■***jolos*®EXALTER **9985**

This mid-cut safety shoe has the features you need for most work situations, such as textile nail protection, toecap in aluminum and high-grip Vibram Nitrile rubber outsole.

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

**TOECAP MATERIAL** Aluminium

FITTING Regular

**SIZE RANGE (US M)** 2,5 - 13

**SIZE RANGE (US W)** 3,5 - 14

**PLATFORM** Performance

SOLE MATERIAL PU midsole, plastic shank, nitrile rubber outsole

INSOLE FX3 Supreme

INSOLE MATERIAL Textile, soft EVA, rigid EVA,









polyester-based conductive thread, neo foam,PORON®

UPPER MATERIAL Microfiber, Textile

LINING MATERIAL Polyester

FEATURES Heat-resistant outsole, oil-resistant outsole, anti-static properties, polstered shaft edge, ventilating insole, BOA® Fit System, quicktie, stabilizator, ankle support, water repellent, ergonomically shaped, soft, specially designed details, double shock absorption zones, conforms with IEC 61340-5-1 (ESD), free from animal-derived materials



MID-CUT, WATER **REPELLANT** WITH BOA



























ASTM F2413-18 EN ISO 20345:2011 SD 35 PR S3, SRC, HRO

This mid-cut safety shoe has the features you need for most work situations, such as textile nail protection, toecap in aluminum and high-grip Vibram Nitrile rubber outsole.

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

**TOECAP MATERIAL** Aluminium

FITTING Regular

**SIZE RANGE (US M)** 2,5 - 13

**SIZE RANGE (US W)** 3,5 - 14

**PLATFORM** Performance

SOLE MATERIAL PU midsole, plastic shank, nitrile rubber outsole

INSOLE FX3 Supreme

INSOLE MATERIAL Textile, soft EVA, rigid EVA, polyester-based conductive thread, neo foam, PORON®

UPPER MATERIAL Microfiber, Textile

LINING MATERIAL Polvester

FEATURES Heat-resistant outsole, oil-resistant outsole, anti-static properties, polstered shaft edge, ventilating insole, stabilizator, ankle support, water repellent, ergonomically shaped, soft, specially designed details, double shock absorption zones, conforms with IEC 61340-5-1 (ESD), free from animalderived materials



**MID-CUT, WATER REPELLANT WITH LACES** 























ASTM F2413-18 EN ISO 20345:2011 SD 35 PR S3, SRC, HRO

# Jalas Exalter 9988 GTX

A light, comfortable, safety shoe with side-mounted BOA®. Waterproof due to GORE-TEX. Its Microfiber upper and sock-like construction provides great comfort and fit.

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Regular

**SIZE RANGE (US M)** 2,5 – 13

**SIZE RANGE (US W)** 3,5 - 14

**PLATFORM** Performance

SOLE MATERIAL PU midsole, plastic shank, nitrile rubber outsole

INSOLE FX3 Supreme

 $\textbf{INSOLE MATERIAL} \ \mathsf{Textile}, \mathsf{soft} \ \mathsf{EVA}, \mathsf{rigid} \ \mathsf{EVA},$ 

polyester-based conductive thread, neo foam, PORON® XRD®

UPPER MATERIAL Microfiber, Textile

LINING MATERIAL Polyamide

FEATURES GORE-TEX Performance Comfort Footwear technology, heat-resistant outsole, oil-resistant outsole, anti-static properties, polstered shaft edge, ventilating insole, BOA® Fit System, quick-tie, stabilizator, waterproof, ergonomically shaped, soft, specially designed details, double shock absorption zones, conforms with IEC 61340-5-1 (ESD), free from animal-derived materials



A MID-CUT SAFETY SHOE, **NOW WITH GORE-TEX** 



DIALED IN. PRECISION FIT.

GO'RE-TEX





















ASTM F2413-18 EN ISO 20345:2011 SD 35 PR

S3, SRC, WR, HRO

# 

A waterproof mid-cut safety boot with highest (S3) protection designed for comfort in cold environments. The grain leather and the durable textile upper protects feet and keeps them warm and features safety reflection strips.

NAIL PROTECTION MATERIAL Steel

TOECAP MATERIAL Aluminium

FITTING Regular

**PLATFORM** Grip

**SIZE RANGE (US M)** 4 - 13

**SIZE RANGE (US W)** 5 - 14

SOLE MATERIAL PU midsole, nitrile rubber outsole INSOLE FX2 Supreme

INSOLE MATERIAL Textile, soft EVA, polyesterbased conductive thread, Merino wool, double shock absorption zones in PORON® XRD®

UPPER MATERIAL Full-grain leather, Textile PRONOSE-MATERIAL PU

 $\textbf{LINING MATERIAL} \ \mathsf{Drylock} \ \mathsf{membrane}, \mathsf{polyester},$ polyamide


 $\textbf{FEATURES} \ \textbf{Waterproof Drylock-membrane, ProNose}$ toe reinforcement, heat-resistant outsole, oil-resistant outsole, anti-static properties, bellows tongue, padded boot shaft, ventilating insole, quick-tie, waterproof, reflector, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)































A tough, water-repellent mid-cut safety boot featuring highest (S3) protection with unique BOA® Fit System. The PU-coated leather and microfibre upper has excellent foot support and certified ankle impact protection.

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

**TOECAP MATERIAL** Composite

FITTING Regular

**SIZE RANGE (US M)** 3.5 – 13.5 **SIZE RANGE (US W)** 4 – 14.5

PLATFORM Arctic Grip

**SOLE MATERIAL** PU midsole, plastic shank, hNBR rubber + Gripper lugs

INSOLE FX2 Supreme

INSOLE MATERIAL Textile, soft EVA, polyester-

based conductive thread, Merino wool, double shock absorption zones in PORON® XRD®

UPPER MATERIAL Microfiber, PU-coated leather

PRONOSE-MATERIAL PU

LINING MATERIAL Technical fleece

FEATURES ProNose to ereinforcement, metatarsal protection with integrated PORON® XRD®, heatresistant outsole, oil-resistant outsole, anti-static properties, bellows tongue, padded boot shaft, polstered shaft edge, BOA® Fit System, ankle protection, ankle support, pull loops, airport friendly, ESD, water repellent, ergonomically shaped, reflector, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

























DIALED IN. PRECISION FIT.

ASTM F2413-18 EN ISO 20345:2011 Mt SD 35 PR S3, SRC, HRO, M, CI, HI, AN

# **■***jalas*® HEAVY DUTY **1278**

A tough, mid-cut safety shoe with highest protection level (S3) and BOA® Fit System built for heavy work.  $The \ PU-coated \ leather \ and \ microfibre \ upper \ gives \ excellent \ foot \ protection \ and \ additional \ ankle \ support.$ 

VIOI CIT

NAIL PROTECTION MATERIAL Steel

**TOECAP MATERIAL** Composite

FITTING Regular

**SIZE RANGE (US M)** 3.5 – 13.5

**SIZE RANGE (US W)** 4 – 14.5

**PLATFORM** Balance

SOLE MATERIAL PU midsole, nitrile rubber outsole

INSOLE FX2 Supreme

INSOLE MATERIAL Textile, soft EVA, polyesterbased conductive thread, Merino wool, double shock absorption zones in PORON® XRD®

UPPER MATERIAL PU-coated leather

**PRONOSE-MATERIAL** PU

LINING MATERIAL Polyester, polyamide

FEATURES ProNose toe reinforcement, heat-resistant outsole, oil-resistant outsole, TPU heel support, bellows tongue, padded shaft edge in memory foam, BOA® Fit System, ankle support, pull loops, water repellent, ergonomically shaped, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)























SD 35 PR

DIALED IN. PRECISION FIT.

ASTM F2413-18 EN ISO 20345:2011 S3, SRC, CI, HRO, HI

# **■***jolos*°GRAN PREMIO **1828 JUPITER**

A tough, comfortable mid-cut safety boot with highest (S3) protection for the toughest outdoor conditions. A PU-coated split leather upper protects feet and is both water-repellent and anti-static.

NAIL PROTECTION MATERIAL Steel

**TOECAP MATERIAL** Aluminium

FITTING Wide

**SIZE RANGE (US M)** 3.5 – 15.5

**SIZE RANGE (US W)** 4 - 16,5

**PLATFORM** Enduro

SOLE MATERIAL PU midsole, nitrile rubber outsole

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in PORON® XRD®

UPPER MATERIAL PU-coated leather **PRONOSE-MATERIAL** PU

LINING MATERIAL Polyester, polyamide

FEATURES ProNose toe reinforcement, wide fit, heat-resistant outsole, oil-resistant outsole, antistatic properties, bellows tongue, padded boot shaft, ventilating insole, ankle support, pull loops, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)



























ASTM F2413-18 EN ISO 20345:2011 S3, SRC, CI, HRO, HI



# *■jalas*° Gran Premio **1938 GP META**

A new boot with integrated impact protection of the metatarsal part of the foot, using XRD® M-Guard that absorbs 90% of the energy upon impact.

NAIL PROTECTION MATERIAL Steel

TOECAP MATERIAL Aluminium

FITTING Wide

SIZE RANGE (US M) 3 5 - 15 5

**SIZE RANGE (US W)** 4 - 16.5

**PLATFORM** Enduro

SOLE MATERIAL PU midsole, nitrile rubber outsole

**INSOLE FX2 Pro** 

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in PORON® XRD®

UPPER MATERIAL PU-coated leather

PRONOSE-MATERIAL PU

LINING MATERIAL Polyamide

FEATURES ProNose toe reinforcement, easy clean upper, metatarsal protection with integrated PORON  $^{\!\circ}$ XRD®, heat-resistant outsole, oil-resistant outsole, bellows tongue, padded boot shaft, polstered shaft edge, ventilating insole, ankle support, pull loops, ESD, antistatic/ATEX, water repellent leather, heat insulating, shock absorbing, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)



WITH **METATARSAL IMPACT PROTECTION** 

























EU Regulation

ASTM F2413-18 EN ISO 20345:2011 Mt SD 35 PR S3, SRC, HRO, M, CI, HI

# Jalas GRAN PREMIO 1598 GP

This boot in the Gran Premio family is made of durable material for demanding work environments. It offers a roomier fit and many safety functions.

NAIL PROTECTION MATERIAL Steel

**TOECAP MATERIAL** Aluminium

**FITTING** Wide

**SIZE RANGE (US M)** 3.5 – 15.5

**SIZE RANGE (US W)** 4 - 16,5

**PLATFORM** Enduro

SOLE MATERIAL PU midsole, nitrile rubber outsole

**INSOLE** FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in PORON® XRD®

UPPER MATERIAL PU-coated leather

PRONOSE-MATERIAL PU

LINING MATERIAL Polyamide

FEATURES ProNose toe reinforcement, easy clean upper, wide fit, heat-resistant outsole, oil-resistant outsole, anti-static properties, bellows tongue, padded boot shaft, polstered shaft edge, ventilating insole, BOA® Fit System, ankle support, pull loops, ESD, antistatic/ATEX, water repellent leather, heat insulating, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)



MID-CUT **HEAVY DUTY PROTECTION** 



DIALED IN. PRECISION FIT.

























SD 35 PR

ASTM F2413-18 EN ISO 20345:2011 S3, SRC, HRO, CI, HI

# **■***jalas*® VIP 2118

A black classic mid-cut business boot combined with a safety shoe. For proper dress both in the office and in the factory. Toe cap and textile nail protection insert.

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

**TOECAP MATERIAL** Steel

FITTING Narrow/Regular **SIZE RANGE (US M)** 3.5 - 13.5

**SIZE RANGE (US W)** 4 - 14.5 SOLE MATERIAL Nitrile rubber outsole

INSOLE FX2 VIP Safety

INSOLE MATERIAL Leather, soft EVA, polyester-based conductive thread, double shock absorption zones in PORON® XRD®

UPPER MATERIAL Full-grain leather

LINING MATERIAL Leather

FEATURES Anti-static properties, ventilating insole, water repellent leather, specially designed details, shock absorbing, conforms with IEC 61340-5-1 (ESD)



LOOK GOOD, **FEEL SAFE** 





ASTM F2413-18 EN ISO 20345:2011 S3, SRA, HRO

















A brown classic mid-cut business boot combined with a safety shoe. For proper dress both in the office and in the factory. Toe cap and textile nail protection insert.

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Steel

FITTING Narrow/Regular

**SIZE RANGE (US M)** 3.5 – 13.5

**SIZE RANGE (US W)** 4 - 14.5

SOLE MATERIAL Nitrile rubber outsole

INSOLE FX2 VIP Safety

INSOLE MATERIAL Leather, soft EVA, polyester-based conductive thread, double shock absorption zones in PORON® XRD®

UPPER MATERIAL Full-grain leather

FEATURES Anti-static properties, ventilating insole, water repellent leather, specially designed details, shock absorbing, conforms with IEC 61340-5-1 (ESD)



LOOK GOOD. **FEEL SAFE** 





ASTM F2413-18 EN ISO 20345:2011 S3, SRA, HRO















# Jalas Green Line 6498 NATURE

First safety boot with EU-Ecolabel. Metal-free with nail protection, toe cap and the FX2 Supreme insole.

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

**TOECAP MATERIAL** Composite

FITTING Narrow/Regular

**SIZE RANGE (US M)** 4 - 13 SIZE RANGE (US W) 5 - 14

**PLATFORM** Green Line

SOLE MATERIAL Plastic shank, PU outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in PORON® XRD®

UPPER MATERIAL Microfiber, Textile

PRONOSE-MATERIAL PU

LINING MATERIAL Polyamide

FEATURES ProNose toe reinforcement, oil-resistant outsole, metal free, anti-static properties, bellows tongue, ventilating insole, pull loops, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD), good environmental choice, meets the EU flower environmental criteria, free from animalderived materials



**FIRST SAFETY BOOT WITH EU-ECOLABEL** 





ASTM F2413-18 EN ISO 20345:2011 S3. SRC

















# **■***jalas*® E-SPORT **1625**

Safety boot, nail protection material plasma-treated composite (PTC) textile, toecap material aluminium, plastic shank, PU outsole, upper material PU-coated leather; Split leather

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

**TOECAP MATERIAL** Aluminium

FITTING Regular

**SIZE RANGE (US M)** 4 – 13

SIZE RANGE (US W) 5 - 14

PLATFORM M-Sport

SOLE MATERIAL Plastic shank, PU outsole

INSOLE FX2 Classic

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, shock absorption zone in Ergothan

UPPER MATERIAL PU-coated leather, Split leather

LINING MATERIAL Polyester, polyamide

FEATURES Low weight, oil-resistant outsole, antistatic properties, bellows tongue, padded boot shaft, ventilating insole, water repellent, reflector, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)



















ASTM F2413-18 EN ISO 20345:2011 S3, SRC, HI, CI



# SAFETY RATING **S3S**

- Protective toe cap
- Penetration-resistant outsole
- Non-metal insert
- Water-repellent upper
- Fully enclosed heel
- Electrical resistance (between 0.1-1000 MegaOhms)
- Energy absorption in the heel area (tested at 20 Joules)

# SAFETY FOOTWEAR | SAFETY RATING S3S: LOW CUT

NEW Jalos EXALTER 9995

Our best-selling water repellent safety shoe, now made from more sustainable materials. Biobased upper, less plastic, recycled outsole and BOA® Fit system.

NAIL PROTECTION MATERIAL EcoFlex Zero perforation textile

TOECAP MATERIAL Aluminium

FITTING Regular

**SIZE RANGE (US M)** 2,5 – 13 **SIZE RANGE (US W)** 3,5 – 14 **PLATFORM** Performance

SOLE MATERIAL PU midsole, plastic shank, nitrile rubber outsole

INSOLE JALAS 8304 FX3 Soft

**UPPER MATERIAL** Microfiber

LINING MATERIAL Polyester



**NEW SUSTAINABLE GENERATION** 



**EcoFlex** 























EN ISO 20345:2022 S3S,HRO,FO,SC



# COLD INSULATED SAFETY FOOTWEAR

### SAFETY FOOTWEAR | COLD INSULATION/SAFETY RATING S2

# Jalas Gran Premio 1870 off Road

Safety boot, toecap material aluminium, PU midsole, plastic shank, rubber outsole, upper material PUcoated leather

TOECAP MATERIAL Aluminium

FITTING Wide

**SIZE RANGE (US M)** 4 – 13.5

**SIZE RANGE (US W)** 5 – 14.5

**PLATFORM** Enduro

SOLE MATERIAL PU midsole, plastic shank, nitrile rubber outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in

UPPER MATERIAL PU-coated leather LINING MATERIAL Technical fleece

FEATURES Wide fit, heat-resistant outsole, oilresistant outsole, anti-static properties, bellows tongue, padded boot shaft, ventilating insole, pull loops, zipper, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)



























ASTM F2413-18 EN ISO 20345:2011 SD 35 PR S2, SRC, HRO, CI

# SAFETY FOOTWEAR | COLD INSULATION/SAFETY RATING S3

# 

A waterproof mid-cut safety shoe with highest (S3) protection levels built for protection in wet conditions. The winter-lined grain leather upper and high cut provides feet with both outstanding safety and support.

NAIL PROTECTION MATERIAL Steel

**TOECAP MATERIAL** Aluminium

FITTING Regular

**SIZE RANGE (US M)** 4 - 13

**SIZE RANGE (US W)** 5 - 14

**PLATFORM** Grip

SOLE MATERIAL PU midsole, nitrile rubber outsole INSOLE FX2 Winter

INSOLE MATERIAL Textile, aluminium foil, soft EVA, polyester-based conductive thread, Merino wool, double shock absorption zones in PORON® XRD®

UPPER MATERIAL Full-grain leather

 $\textbf{LINING MATERIAL} \ \mathsf{Drylock} \ \mathsf{membrane}, \mathsf{polyester},$ ThermoCloud - thermal insulation

 $\textbf{FEATURES} \ \textbf{Waterproof Drylock-membrane, heat-}$ resistant outsole, oil-resistant outsole, anti-static properties, bellows tongue, padded boot shaft, pull loops, snow lock, zipper, waterproof, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)




































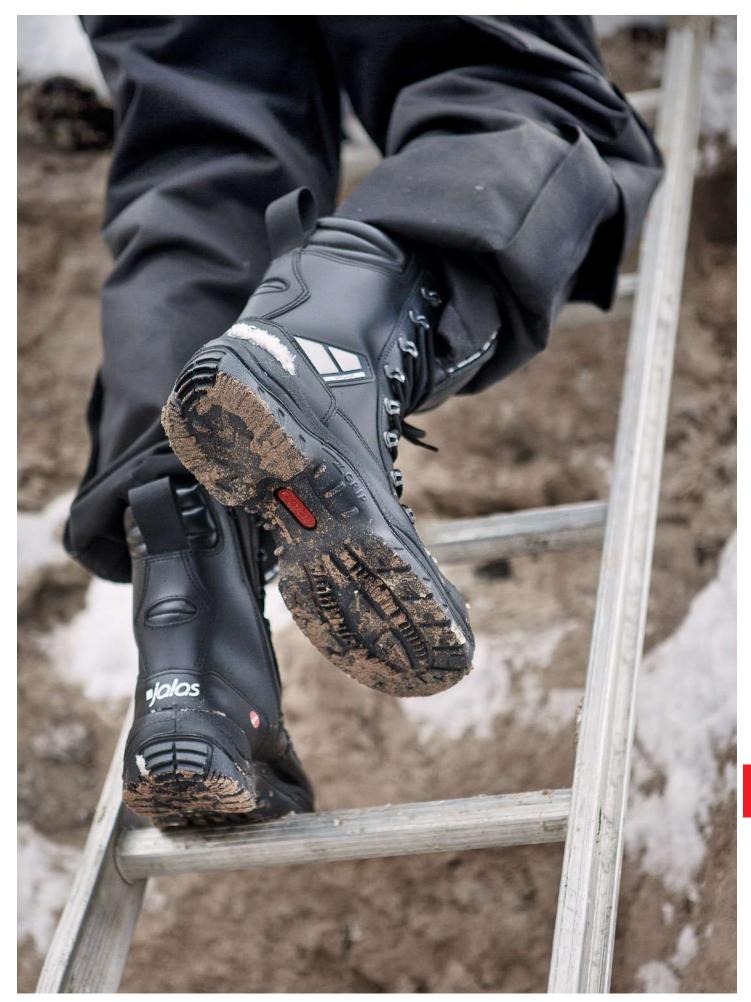

PROTECTIVE HAND AND FOOTWEAR PRODUCT CATALOG 2025 | **131** | SHOES

A waterproof safety boot with Drylock membrane and highest (S3) protection level built for wet conditions. The grain leather upper and higher cut provides excellent fit and supports feet for day-long use.

NAIL PROTECTION MATERIAL Steel

TOECAP MATERIAL Aluminium

FITTING Regular

**SIZE RANGE (US M)** 4 - 13

**SIZE RANGE (US W)** 5 - 14

**PLATFORM** Grip

SOLE MATERIAL PU midsole, nitrile rubber outsole

INSOLE FX2 Supreme

INSOLE MATERIAL Textile, soft EVA, Merino wool, double shock absorption zones in PORON® XRD®

UPPER MATERIAL Full-grain leather


PRONOSE-MATERIAL PU

LINING MATERIAL Drylock membrane, polyester, polyamide

 $\textbf{FEATURES} \ \textbf{Waterproof Drylock-membrane, ProNose}$ toe reinforcement, heat-resistant outsole, oil-resistant outsole, anti-static properties, bellows tongue, padded boot shaft, ventilating insole, pull loops, waterproof, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)



























### NEW **J**olos° HEAVY DUTY 1378B

A fully lined winter safety boot with highest (S3) protection designed for very cold or slippery conditions. PU-coated leather, and synthetic fur and Thinsulate™ lining mean feet are protected in any conditions.

NAIL PROTECTION MATERIAL Steel

TOECAP MATERIAL Composite

FITTING Regular

**SIZE RANGE (US M)** 3.5 - 13.5

**SIZE RANGE (US W)** 4 – 14.5

PLATFORM Arctic Grip

**SOLE MATERIAL** PU midsole, nitrile rubber outsole

INSOLE IAL AS 8245 FX2 ThermAL

INSOLE MATERIAL Textile, aluminium foil, soft EVA, polyester-based conductive thread.

Merino wool, double shock absorption zones in PORON® XRD®

UPPER MATERIAL PU-coated leather

PRONOSE-MATERIAL PU

LINING MATERIAL Polyester fur, Thinsulate

FEATURES ProNose toe reinforcement, heatresistant outsole, oil-resistant outsole, antistatic properties, bellows tongue, padded boot shaft, extra shoelaces, ankle support, pull loops, snow lock, zipper, ESD, water repellent, reflector, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)





THE ULTI-**MATE WINTER SAFETY BOOT FOR HARSH** CONDITIONS







































# ■jalas® GRAN PREMIO 1508 GP

This high-cut safety boot is made for the really tough conditions. It has as a lot of features both for convenience and safety.

NAIL PROTECTION MATERIAL Steel TOECAP MATERIAL Aluminium

FITTING Wide

**SIZE RANGE (US M)** 3.5 – 15.5 **SIZE RANGE (US W)** 4 - 16,5

PLATFORM Enduro

SOLE MATERIAL PU midsole, nitrile rubber outsole **INSOLE** FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in PORON® XRD®

UPPER MATERIAL PU-coated leather PRONOSE-MATERIAL PU

LINING MATERIAL Technical fleece

FEATURES ProNose toe reinforcement, easy clean upper, wide fit, heat-resistant upper, heat-resistant outsole, oil-resistant outsole, anti-static properties, bellows tongue, padded boot shaft, polstered shaft edge, ventilating insole, BOA® Fit System, ankle support, pull loops, ESD, antistatic/ATEX, water repellent leather, heat insulating, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)





FOR THE REALLY **TOUGH CONDI-**TIONS



































ASTM F2413-18 EN ISO 20345:2011 SD 35 PR S3, SRC, HRO, CI, HI

# ■*ialas*° Gran Premio 1878 OFF ROAD

A premium safety boot with anti-static properties and highest (S3) level protection built for heavy work. The durable PU-coated leather upper and technical fleece lining keeps feet and safe and warm when

NAIL PROTECTION MATERIAL Steel

TOECAP MATERIAL Aluminium

**FITTING** Wide

**SIZE RANGE (US M)** 3.5 - 15.5

**SIZE RANGE (US W)** 4 - 16,5

**PLATFORM** Enduro

SOLE MATERIAL PU midsole, nitrile rubber outsole

**INSOLE FX2 Pro** 

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in PORON® XRD®

UPPER MATERIAL PU-coated leather

PRONOSE-MATERIAL PLL


LINING MATERIAL Technical fleece

FEATURES ProNose toe reinforcement, wide fit, heat-resistant outsole, oil-resistant outsole, antistatic properties, bellows tongue, padded boot shaft, ventilating insole, ankle support, pull loops, zipper, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)

































# S3, SRC, CI, HRO, HI

# Jalos GRAN PREMIO 1808 ICE TRACK

A triple-lined, zip and lace-up safety boot with highest(S3) protection designed for the extreme cold. The PU-coated leather upper protects feet and keeps them warm and comfortable all day long.

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

**FITTING** Wide

**SIZE RANGE (US M)** 4 - 13.5

**SIZE RANGE (US W)** 5 - 14.5

**PLATFORM** Enduro

SOLE MATERIAL PU midsole, plastic shank, nitrile rubber outsole

**INSOLE** FX2 Winter

INSOLE MATERIAL Textile, aluminium foil, soft EVA,

polyester-based conductive thread, Merino wool, double shock absorption zones in PORON® XRD®

UPPER MATERIAL PU-coated leather

PRONOSE-MATERIAL PU

LINING MATERIAL Aluminium foil, Meida® thermo insulation, polyester fur

FEATURES ProNose toe reinforcement, wide fit, heatresistant outsole, oil-resistant outsole, anti-static properties, bellows tongue, padded boot shaft, pull loops, zipper, water repellent, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)







**■***j***a***l***a***s*°HEAVY DUTY 1398 WINTER GTX







ASTM F2413-18 EN ISO 20345:2011

























A waterproof safety boot ideal for a wet and very cold winter. GORE-TEX and fur lining keeps the feet dry and warm. Two BOA® on the side and a high-grip Vibram® Arctic Grip Pro outsole.

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

**TOECAP MATERIAL** Composite

FITTING Regular

**SIZE RANGE (US M)** 3.5 – 13.5

**SIZE RANGE (US W)** 4 – 14.5

PLATFORM Arctic Grip

SOLE MATERIAL PU midsole, nitrile rubber outsole

INSOLE JALAS 8245 FX2 ThermAL

INSOLE MATERIAL Textile, aluminium foil, soft EVA. polvester-based conductive thread. Merino

wool, double shock absorption zones in PORON® XRD®

UPPER MATERIAL Full-grain leather, Microfiber, Textile

PRONOSE-MATERIAL PU

LINING MATERIAL Polyester/wool fur

FEATURES GORE-TEX Insulated Comfort Footwear technology, ProNose toe reinforcement, heat-resistant outsole, oilresistant outsole, anti-static properties, bellows tongue, padded boot shaft, BOA® Fit System, stabilizator, pull loops, antistatic/ATEX, waterproof, double shock absorption zones





A GORE-TEX **BOOT FOR VERY COLD WINTERS.** 



































ASTM F2413-18









# **HEAT & WELDING PROTECTION**

### SAFETY FOOTWEAR | HEAT & WELDING PROTECTION/SAFETY RATING S3

# *■jalas*<sup>®</sup> 1228W

Our most comfortable and durable welding boot with the best possible protection. The BOA® Fit system enables perfect fit and for extra protection it is covered by PU-coated leather.

NAIL PROTECTION MATERIAL Steel **TOECAP MATERIAL** Composite

FITTING Regular

**SIZE RANGE (US M)** 3.5 – 13.5 **SIZE RANGE (US W)** 4 - 14.5

**PLATFORM** Balance

SOLE MATERIAL PU midsole, nitrile rubber outsole

**INSOLE** FX2 Supreme

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in PORON® XRD®

UPPER MATERIAL PU-coated leather

PRONOSE-MATERIAL PU

LINING MATERIAL Polyamide

FEATURES ProNose toe reinforcement, KEVLAR® thread in the seams which resists 427° C short-term heat exposure (max operating limit) and 204° C longerterm heat exposure (constant operating limit), heatresistant upper, heat-resistant outsole, oil-resistant outsole, anti-static properties, padded boot shaft, ventilating insole, BOA® Fit System, water repellent



MID-CUT **BOOT WITH HIDDEN BOA® FIT SYSTEM** 























ASTM F2413-18 EN ISO 20345:2011

EN ISO 203492:2017 S3, SRC, CI, HRO, HI, WG S3, SRC, CI, HRO, HI, WG

# JOIOS GRAN PREMIO 19485 METATARSAL

A durable boot for heavy industrial work with kevlar stitching for extreme heat resistance and great comfort. Integrated impact protection of the metatarsal part of the foot.

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

FITTING Wide

**SIZE RANGE (US M)** 4 – 13.5

**SIZE RANGE (US W)** 5 – 14.5

PLATFORM Enduro

**SOLE MATERIAL** PU midsole, plastic shank, nitrile rubber outsole

**INSOLE** FX2 Supreme

INSOLE MATERIAL Textile, soft EVA, polyesterbased conductive thread, Merino wool, double shock absorption zones in PORON® XRD®

UPPER MATERIAL Full-grain leather

PRONOSE-MATERIAL PU

LINING MATERIAL Polyester, polyamide

FEATURES ProNose toe reinforcement, wide fit, KEVLAR® thread in the seams which resists 427° C short-term heat exposure (max operating limit) and 204° C longer-term heat exposure (constant operating limit), heat-resistant upper, heat-resistant outsole, oil-resistant outsole, anti-static properties, padded boot shaft, adjustable ankle strap, pull loops, water repellent, flame retardant, specially designed details, double shock absorption zones



**METATARSAL IMPACT PROTECTION BOOT** 































### SAFETY FOOTWEAR | HEAT & WELDING PROTECTION/SAFETY RATING S3

# ■ialas® GRAN PREMIO 1868W KING

Comfortable high boot with highest level of protection, for hot work with features such as wide last, Kevlar thread, heat-resistant upper and outsole. Perfect for welders.

**NAIL PROTECTION MATERIAL Steel** 

TOECAP MATERIAL Aluminium FITTING Wide

**SIZE RANGE (US M)** 3.5 – 15.5 **(US W)** 4 – 16,5

**PLATFORM** Enduro

**SOLE MATERIAL** PU midsole, nitrile rubber outsole

**INSOLE** FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in PORON® XRD<sup>®</sup>



# **Thinsulate**

UPPER MATERIAL PU-coated leather

PRONOSE-MATERIAL PU

LINING MATERIAL Polyester, Thinsulate

 $\textbf{FEATURES} \ \mathsf{ProNose} \ \mathsf{toe} \ \mathsf{reinforcement}, \mathsf{Thinsulate}^{^{\sim}} \mathsf{heat}$ insulation, wide fit, KEVLAR® thread in the seams which resists 427° C short-term heat exposure (max operating limit) and 204° C longer-term heat exposure (constant operating limit), heatresistant upper, heat-resistant outsole, oil-resistant outsole, anti-static properties, padded boot shaft, ventilating insole, pull loops, water repellent, double shock absorption zones



**HIGH BOOT FOR HOT WORK** 























ASTM F2413-18 EN ISO 20345:2011 S3, SRC, CI, HRO, HI, WG EN ISO 203492:2017

# **JOLOS** GRAN PREMIO **1848K TITAN**

A mid-cut safety boot with Thinsulate" heat-resistant lining for highest (S3) protection for tough work. The PU-coated leather upper with Kevlar® seams resists heat of up to 204° C for extended periods of time.

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Aluminium

**FITTING** Wide

SIZE RANGE (US M) 3.5 - 15.5

**SIZE RANGE (US W)** 4 - 16,5

**PLATFORM** Enduro

SOLE MATERIAL PU midsole, plastic shank, nitrile rubber outsole

INSOLE FX2 Pro

INSOLE MATERIAL Textile, soft EVA, polyester-based

conductive thread, double shock absorption zones in PORON® XRD®

UPPER MATERIAL PU-coated leather

PRONOSE-MATERIAL PU

LINING MATERIAL Polyester, Thinsulate

**FEATURES** ProNose toe reinforcement, Thinsulate™ heat insulation, wide fit, KEVLAR® thread in the seams which resists 427° C short-term heat exposure (max operating limit) and 204° C longer-term heat exposure (constant operating limit), heat-resistant upper, heatresistant outsole, oil-resistant outsole, anti-static properties, padded boot shaft, ventilating insole, pull loops, water repellent, double shock absorption zones

























# **CHAINSAW PROTECTION**

# *■jalas*<sup>®</sup> 1988 CHAINSAW GTX

A trekking style, robust protective boot for chainsaw work, with GORE-TEX for 100% waterproofness and Vibram® nitrile outsole for a secure grip even in wet and slippery conditions.

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

TOECAP MATERIAL Steel

FITTING Narrow/Regular

**SIZE RANGE (US M)** 6.5 – 13

**SIZE RANGE (US W)** 7.5 - 14

SOLE MATERIAL PU midsole, nitrile rubber outsole

INSOLE JALAS 8303 FX3 Supreme

INSOLE MATERIAL Textile, soft EVA, rigid EVA, polyester-based conductive thread, neo foam, pORON® XRD®

UPPER MATERIAL Rubber, Split leather, Textile LINING MATERIAL Polyamide

FEATURES GORE-TEX Performance Comfort Footwear technology, chain saw cutting resistance, padded boot shaft, stabilizator, waterproof, double shock absorption zones



WHEN WORKING WITH CHAINSAW




















# SAFETY RATING 01

- · Fully enclosed heel
- Electrical resistance (between 0.1-1000 MegaOhms)
- Energy absorption in the heel area (tested at 20 Joules)

# OCCUPATIONAL FOOTWEAR | SAFETY RATING 01

# **jalas** SPOC **5382**

A comfortable and certified occupational shoe for people who are on their feet all day. High breathability makes the shoes cool and the BOA® Fit System on the side gives a perfect fit.

FITTING Regular

**SIZE RANGE (US M)** 2,5 - 13 **SIZE RANGE (US W)** 4,5 - 14

**PLATFORM** Active

SOLE MATERIAL EVA, nitrile rubber outsole

INSOLE FX2 Pro SpOc

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in PORON® XRD®

**UPPER MATERIAL** Textile

LINING MATERIAL Polyester

 $\textbf{FEATURES} \ \textbf{Breathable} \ \textbf{mesh, low weight, oil-resistant}$ outsole, anti-static properties, BOA® Fit System, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)



**FOR THE SERVICE** SECTOR, WITH BOA®











EN ISO 20347:2012 01, SRC, FO, A, E









# **jalas** SPOC **5362**

A light, sporty, comfortable low-cut occupational shoe featuring convenient side-mounted BOA $^\circ$  Fit System. A ventilated textile upper gives strong yet flexible support for feet and keeps them cool when the heat is on.

FITTING Regular

**SIZE RANGE (US M)** 2,5 – 13

**SIZE RANGE (US W)** 4,5 - 14

PI ATFORM Active

SOLE MATERIAL EVA, nitrile rubber outsole

INSOLE FX2 Pro SpOc

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in PORON® XRD®

**UPPER MATERIAL** Textile

LINING MATERIAL Polyester

 $\textbf{FEATURES} \ \textbf{Breathable} \ \textbf{mesh, low weight, oil-resistant}$ outsole, anti-static properties, BOA® Fit System, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)




















# **■***jalas*®SP0C **5462**

A comfortable and certified shoe for use in healthcare work environments. High breathability makes the shoe cool and the BOA® Fit System on the side gives a perfect fit.

FITTING Regular

**SIZE RANGE (US M)** 2,5 - 13 **SIZE RANGE (US W)** 4,5 - 14

**PLATFORM** Active

SOLE MATERIAL EVA, nitrile rubber outsole

INSOLE FX2 Pro SpOc

INSOLE MATERIAL Textile, soft EVA, polyester-based conductive thread, double shock absorption zones in PORON® XRD®

UPPER MATERIAL Textile LINING MATERIAL Polyester

 $\textbf{FEATURES} \ \textbf{Breathable mesh, low weight, anti-static}$ properties, BOA® Fit System, double shock absorption zones, conforms with IEC 61340-5-1 (ESD)



**FOR THE HEALTHCARE SECTOR, WITH BOA®** 



DIALED IN. PRECISION FIT.

ASTM F2892-18

EN ISO 20347:2012 01, SRC, FO, A, E









# NEW Jalas SPOC **5312**

An exceptionally comfortable shoe featuring a slip-on sock construction. The upper is knitted in an ultralight material, seamlessly crafted and very breathable.

FITTING Regular

**SIZE RANGE (US M)** 3.5 – 13.5

**SIZE RANGE (US W)** 4 – 14.5

**PLATFORM** Active

SOLE MATERIAL EVA, nitrile rubber outsole

INSOLE JALAS 8104 FX2 Pro Slim

INSOLE MATERIAL Textile, soft EVA, polyesterbased conductive thread, double shock absorption zones in PORON® XRD®

UPPER MATERIAL Knitted textile

FEATURES Low weight, oil-resistant outsole, metal free, anti-static properties, ventilating insole, pull loops, ESD, soft, elastic, conforms with IEC 61340-5-1 (ESD)



**ULTRA LIGHT AND SOFT FROM SUSTAINABLE MATERIALS** 









ASTM F2892-18

SD 35

EN ISO 20347:2022 01,SR,F0



# **INSOLES**

SHAPE & ARCH SUPPORT	INSOLE	SIZE	CUSHIONING	GENERAL INFORMATION
JALAS® FSS insoles  Specific anatomic arch support  Extra heel support  Control bar for extra stability  Neutralizer Insole	8709H High arch	34-50	Double shock absorption zones with Poron® XRD™.	FootStop Service insole.
	8710M Medium arch	34-50	Double shock absorption zones with Poron® XRD™.	FootStop Service insole.
	8711L Low arch	34-50	Double shock absorbtion zones with Poron® XRD™.	FootStop Service insole.
Anatomic shape Improved support for the arch and heel	8202 FX2 Supreme	35-50	Double shock absorption zones with Poron® XRD™.	Merino wool layer for moisture absorption and comfort.

# Jalas Neutralizer 8709H HIGH ARCH

Insole for high arches that makes your Jalas shoes even more comfortable and safe. Double shock absorption zones in PORON® XRD® reduces the risk of injury and increase comfort.

MATERIAL Control bar in TPU, double shock absorption zones in PORON® XRD®, polyester based electro conductive thread, soft E.V.A, textile

COLOUR Black, Blue
SIZE RANGE (US M) 2.5-15.5
SIZE RANGE (US W) 3.5-16.5
UNITS PER BUNDLE/CARTON 50 Pairs

FEATURES ESD, anatomically designed, ergonomically shaped, heel/arch support, perforated front section, cuttable, high arch, double shock absorption zones, approved for use in all JALAS® protective shoes

**PROPERTIES** Perfect fit, extra comfortable, breathable, excellent shock absorption



MAKES YOUR JALAS® EVEN MORE COMFORTABLE











# ■jalas® NEUTRALIZER 8710M MEDIUM ARCH

Insole for medium-high arches that makes your Jalas shoes even more comfortable and safe. Double shock absorption zones in  $PORON^{\circ}$  XRD $^{\circ}$  reduces the risk of injury and increase comfort.

MATERIAL Control bar in TPU, double shock absorption zones in PORON® XRD®, polyester based electro conductive thread, soft E.V.A, textile

COLOUR Black, Green
SIZE RANGE (US M) 2.5-15.5
SIZE RANGE (US W) 3.5-16.5
UNITS PER BUNDLE/CARTON 50 Pairs

**FEATURES** ESD, anatomically designed, heel/ arch support, perforated front section, cuttable, medium height arch, double shock absorption zones, approved for use in all JALAS® protective shoes

**PROPERTIES** Perfect fit, extra comfortable, breathable, excellent shock absorption



MAKES YOUR MEDIUM ARCHES HAPPY











# Jalos Neutralizer 8711L LOW ARCH

Insole for low arches that makes your Jalas shoes even more comfortable and safe. Double shock absorption zones in PORON $^{\circ}$  XRD $^{\circ}$  reduces the risk of injury and increase comfort.

MATERIAL Double shock absorption zones in PORON® XRD®, polyester based electro conductive thread, soft E.V.A, textile

COLOUR Black, Orange
SIZE RANGE (US M) 2.5-15.5
SIZE RANGE (US W) 3.5-16.5
UNITS PER BUNDLE/CARTON 50 Pairs

FEATURES ESD, anatomically designed, heel/ arch support, perforated front section, cuttable, low arch, double shock absorption zones, approved for use in all JALAS® protective shoes PROPERTIES Perfect fit, breathable, excellent shock absorption



PERFECT FOR YOUR LOW ARCHES













# ccessories

# FSS INSOLES ABSORB SHOCKS AND REDUCE STRESS ON YOUR FEET

- Shock absorption cushions under the heels transfer the energy from impact efficiently outwards, while the heel cups mould to the shape of your heels.
- Shock-absorbing Poron® XRD® material is used under the heels and the front part of
  the insoles. It absorbs impacts to the heels and balls of your feet, providing you with
  comfortable and ergonomic support.
- Slightly higher arch. JALAS® Neutralizer insoles for high arches were redesigned
  according to the results of approximately 450,000 FootStopService scans. The new
  higher insoles are manufactured from softer materials that provide better cushioning.
  The insoles have a shock-absorbing zone under the balls of the feet that reduces the
  strain common with high arches by following the anatomical shape of the transverse arch.





### LOW, MEDIUM OR HIGH FOOT ARCH?

JALAS® Neutralizer insoles are approved for use in JALAS® safety shoes and are ESD certified, just as our original insoles. The unique material provides dynamic support – so that the shock absorption of the foot is enhanced and the arch gets extra support. It makes your feet feel better and stay fit and fresh all day.

- Anatomically designed insoles for a low, medium or high arch.
- Double shock absorption zones with Poron® XRD®.
- Marked heel cups and perforated front.
- Approved for use in all JALAS® safety shoes.
- Compliant to IEC 61340-5-1 (ESD).



SHAPE & ARCH SUPPORT	INSOLE	SIZE	CUSHIONING	GENERAL INFORMATION
FootStopService JALAS® FSS insoles	8709H High arch	34-50	Double shock absorption zones with Poron® XRD™.	FootStopService  Solds  FootStop Service insole.
Specific anatomic arch support Extra heel support Control bar for extra stability	8710M Medium arch	34-50	Double shock absorption zones with Poron® XRD™.	FootStopService  Joacs  FootStop Service insole.
Neutralizer Insole Single sizes for optimal fit	8711L Low arch	34-50	Double shock absorbtion zones with Poron® XRD™.	FootStopService  **Joint Stop Service insole.

# JALAS® FootStop Service

Repetitive strain injuries (RSI) and musculoskeletal disorders (MSD) are probably the foremost work environment problem in the western world.

Footscanner FootStop Service (FSS) can quickly and easily help with foot analysis, working as a form of preventative healthcare.

### **NEURTRALIZER INSOLE WITH ARCH-SUPPORT**

The FSS insoles are anatomically designed to make your Jalas shoes even more comfortable and safe.

 $FSS\,Neutralizer\,in soles\,support\,and\,stabilize\,the\,feet.\,FSS\,FootStop\,Service\,cannot,$ however, replace medical treatment of injuries already sustained. JALAS® anatomical Neutralizer insoles solve many problems – but not all. For people who have severe problems with their feet, orthopedically tested insoles are a must.

JALAS® footwear provides a comprehensive approach to both shoes and insoles: All JALAS® branded footwear, when fitted with JALAS® Insoles, are certified to EN ISO 20345 or ENISO 2034 – and are compliant with IEC 61340-5-1 ESD protection.



# ■jalas® 8202 FX2 SUPREME

Insole, textile, soft E.V.A, polyester based electro conductive thread, Merino wool, double shock absorption zones in PORON® XRD®, black, grey

MATERIAL Double shock absorption zones in PORON® XRD®, Merino wool, polyester based electro conductive thread, soft E.V.A, textile COLOUR Black, Grey

SIZE RANGE (US W) 3.5 – 15.5 SIZE RANGE (US W) 4 – 16,5 UNITS PER BUNDLE/CARTON 50 Pairs **FEATURES** ESD, ergonomically shaped, soft, perforated front section, double shock absorption zones, moisture-wicking, approved for use in all JALAS® protective shoes

**PROPERTIES** Extra comfortable, breathable, excellent shock absorption











### **SOCKS**

# *■jalas*<sup>®</sup> 8203

Extra soft and comfortable sock in bamboo viscose, a material with very good breathbility. Anatomical design with left and right foot provides a perfect fit.

 $\textbf{MATERIAL} \ \mathsf{Bamboo}, \ \mathsf{nylon}, \ \mathsf{polyester}, \ \mathsf{spandex}$ 

**COLOUR** Black

**SIZE RANGE (US M)** 4 – 13 **SIZE RANGE (US W)** 5 – 14

PAIRS PER PACKAGE/CARTON 6/60 DISPLAY Hook with hangtag

**FEATURES** Soft, elastic, washable in 40° C, moisture-wicking, thin

**PROPERTIES** Perfect fit, extra comfortable, very breathable



EXTRA SOFT WITH BAMBOO VISCOSE





## **ANTI-SLIP PROTECTION**

# •jalas 8023 SLIP PROTECTION

Anti-slip protection, TPE, black

MATERIAL TPE COLOUR Black

PAIRS PER PACKAGE/CARTON 36 Pairs

**FEATURES** Ten studs, easy to put on and take off, suitable for all shoes and boots

PROPERTIES Excellent grip









### ALPHANUMERIC INDEX

Page

75

75

75

61

50 55

58

54

55

วก

19

22

23

23

34

38

40

40

51

40

41

43

14

27

15

52

26

54

54

72

28

.134

.125

130

132 122

128

Product

TEGERA Dynamic Strength 7770 TEGERA Dynamic Strength 7773

TEGERA Dynamic Strength 7775
TEGERA Dynamic Strength 7776
TEGERA Dynamic Strength 7776
TEGERA Dynamic Strength 7780

TEGERA Dynamic Strength 7792 TEGERA Dynamic Strength 7795

TEGERA Dynamic Strength 7797

TEGERA Dynamic Strength 7798

TEGERA Dynamic Strength 7799
TEGERA Infinity 8800 .....

TEGERA Infinity 8801

TEGERA Infinity 8802

TEGERA Infinity 8803

TEGERA Infinity 8804

TEGERA Infinity 8805

TEGERA Infinity 8806

TEGERA Infinity 8807

TEGERA Infinity 8808

TEGERA Infinity 8810

TEGERA Infinity 8811

TEGERA Infinity 8812

TEGERA Infinity 8814

TEGERA Infinity 8815

TEGERA PRO 9100

TEGERA PRO 9102

TEGERA PRO 9105

TEGERA PRO 9122

TEGERA PRO 9125

TEGERA PRO 9127

TEGERA PRO 9128

TEGERA PRO 9180

TEGERA PRO 9205

JALAS Drylock 3318

JALAS Drylock 3325 JALAS Drylock 3328

JALAS E-Śport 1615

JALAS E-Sport 1625

JALAS 1228W

### **GLOVES**

### Product Page TEGERA 12 .29 TEGERA 17 .59 TEGERA 19 .63 TEGERA 70 47 TEGERA 72 47 TEGERA 73 47 TEGERA 75 47 TEGERA 106 29 TEGERA 114 16 TEGERA 118A 62 TEGERA 124 16 TEGERA 126A 62 TEGERA 132A 64 TEGERA 191 58 TEGERA 215 38 TEGERA 293 56 TEGERA 295 55 TEGERA 297 .56 TEGERA 299 .57 TEGERA 321 TEGERA 322 .50 TEGERA 325 .15 TEGERA 411 TEGERA 417 TEGERA 430 TEGERA 432 TEGERA 433 TEGERA 441 TEGERA 450 39 TEGERA 465A TEGERA 517 TEGERA 518 .52 TEGERA 519 53 TEGERA 520 .28 TEGERA 577 .53 TEGERA 585 64 TFGFRA 595 58 TEGERA 640 28 TEGERA 666 .60 TEGERA 737 31 18 TEGERA 777 TEGERA 804 .68 TEGERA 811 69 TEGERA 842 77 TEGERA 846 77 TEGERA 849 78 TEGERA 866 .19 TEGERA 867 18 TEGERA 868 .19 TEGERA 873 21 TEGERA 877 .68 TEGERA 878 .68 TEGERA 882 .31 TEGERA 883A 20 TEGERA 884A 20 TEGERA 888 29 TEGERA 905 36 TEGERA 906 37 TEGERA 909 37 TEGERA 910 46 TEGERA 913 TEGERA 987 .61 TEGERA 6614 .14 TEGERA 6615 30 TEGERA 7361 79 TEGERA 7363 79 TEGERA 8820 .21 TEGERA 8821 21 TEGERA 8840 46 TEGERA 8844 41 TEGERA 8845 42 35 TEGERA 43001 TEGERA 71000 78 TEGERA 84301

### **SHOES**

Product	Page
JALAS Exalter 9955	121
JALAS Exalter 9965	۱∠۱
JALAS Exalter 9968 GTX	120 171
JALAS Exalter 9975	
JALAS Exalter 9985	124
JALAS Exalter 9988 GTX	
JALAS Gran Premio 1508 GP	132
IAL AS Gran Promio 1558 GP	121
JALAS Gran Premio 1558 GP JALAS Gran Premio 1598 GP	127
JALAS Gran Premio 1808 Ice Track	133
JALAS Gran Premio 1828 Jupiter	126
JALAS Gran Premio 1848K Titan	135
JALAS Gran Premio 1868W King	135
JALAS Gran Premio 1870 Off Road	130
JALAS Gran Premio 1878 Off Road	133
JALAS Gran Premio 1938 GP Meta	127
JALAS Gran Premio 1948S Metatarsa	l134
JALAS Green Line 6468 EKO	122
JALAS Green Line 6498 Nature	
JALAS Grip 3780 Foods	116
JALAS Heavy Duty 1278	126
JALAS Heavy Duty 1358	126
JALAS Heavy Duty 1378B	132
JALAS M-Sport 3460A Light Sport JALAS SPOC 5362	116
JALAS SPOC 5362	136
JALAS SPOC 5382 JALAS SPOC 5462	136
JALAS SPOC 5462	137
IAL AS Tempus 5608	113
JALAS Tempus 5618	113
JALAS Tempus 5628 JALAS Tempus 5668	114
JALAS Tempus 5668	114
JALAS VIP 2108	
JALAS VIP 2118	
JALAS VIP 2128	128
JALAS White 3520	117
JALAS Zenit 1718	124
JALAS Zenit 1738	119
JALAS Zenit 3018	119
JALAS Zenit Evo 7100	111
JALAS Zenit Evo 7118	
JALAS Zenit Evo 7128	
JALAS Zenit Evo 7138	
JALAS Zenit Evo 7158	
JALAS Zenit Evo 7168	
JALAS Zenit Evo 7178	124

JALAS 8023 Slip Protection....

### INSOLES/SOCKS/ACCESSORIES

Product	Page
JALAS 8202 FX2 Supreme JALAS 8203 JALAS Neutralizer 8709H High Arch JALAS Neutralizer 8710M Medium Arc JALAS Neutralizer 8711L Low Arch	143 139 :h.139

Рабе

### **EXPLANATION OF SYMBOLS, PROTECTIVE GLOVES**



EN 388:2016 + A1:2018 Protective gloves against mechanical risks.



ENIS0374-1:2016+ A1:2018 Protective gloves against chemicals and microorganisms - Part 1: Terminology and performance require-

ments for chemical risks.



ENIS0374-5:2016 Protective gloves against chemicals and microorganisms - Part 5: Terminology and performance requirements for microorganism risks.



EN 407:2004 Protective gloves against thermal risks (heat and/or fire)



EN 407:2020 Protective gloves against thermal risks (heat and/or fire)



EN 407:2020 Protective gloves against thermal risks (heat and/or fire). Without limited flame spread.



EN 511:2006 Protective gloves against cold.



ENISO11393-4:2019 Hand-held chainsaw PROtective gloves.



EN 16350:2014 Protective gloves -Electrostatic Properties.



ANSI/ISEA 2016 Cut resistant levels with classifications, A1-A9.



ANSI/ISEA 105-2016 Abrasion resistance levels with classifications, A1-A6.









Waterproof membrane



Water repellent



Breathable



Cut protection

**UPDATES FOR EN 407** 









touschscreen



# **EXPLANATION OF SYMBOLS, PROTECTIVE FOOTWEAR**



Aluminium toecap



toecap



Composite toecap



Nail Protection in steel



Nail Protection in plasma-treated composite (PTC) textile



Winter model



Waterproof



Water repellent



Oil-resistant outsole



Heat-resistant outsole



Wide fit



Ergothan Shock Absorption System



Shock absorbing



ProNose toe reinforcement



Heat-resistant upper



Zipper



Stabilizator



Properties



# **GLOVE SIZES: COLOR CODING**

The inclusion of this color coding on the glove label, on the packaging or on the edging makes it easier for you to find your size quickly. Please note: Brands other than TEGERA® may have different color coding.




# **FOOTWEAR SIZE GUIDE**

It's very important to choose the right size for your safety footwear. A shoe that is too tight or too loose will not only make your working day uncomfortable, it can also lead to blisters and other injuries, and as a result a risk that you will choose to wear other less protective shoes.

Below is a size guide that converts sizes based on the shoe size systems used in different regions. This table is intended as a starting point only. It is of course always best to try on the shoes before you make your final decision. The rigidity of the protective toe cap, for example, means you ought to allow 5–8 mm of extra room for natural movement when walking, so you may need a size bigger than you do for your casual shoes. Don't forget to count in things like extra warm, thick socks and insoles as well.

JALAS° STANDARD SIZING	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50
US Male	2 1/2	3 1/2	4	5	51/2	61/2	71/2	8	9	91/2	101/2	11	12	13	13 1/2	14 1/2	15 1/2
US Female	3 1/2	4	5	6	61/2	71/2	81/2	9	10	11	111/2	12	13	14	14 1/2	-	-
UK	11/2	2	3	4	5	6	6½	7	8	9	10	101/2	11	12	13	14	15
Millimeter	228	235	242	249	256	262	269	276	282	289	296	302	309	316	323	329	336

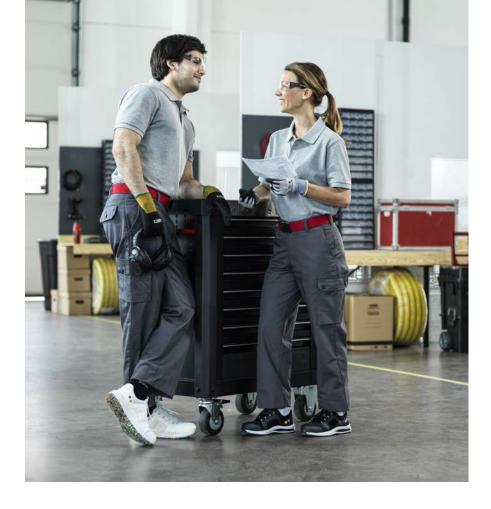

# OUR VISION IS ZERO INJURIES TO HANDS AND FEET

At Ejendals, we have a long history of reducing the risk of preventable injuries to hands and feet. We 've been doing it for 75 years. Carefully developed and tested in co-operation with leading experts in materials, function and ergonomics we offer the best safety equipment. With a continuous dialogue with those who use our safety gloves and footwear we know what 's expected from us.



www.ejendals.com